

**SPECIFICATION**


Current Rate: 1.5 AMP  
 Insulation Resistance: 1000M Ω Min.  
 Contact Resistance: 20m Ω Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C

**MATERIAL**

Insulator: Polyester, UL 94V-0  
 Standard: PBT or Nylon 6T  
 Contact Pin: Copper Alloy  
 Contact Plating: Gold Flash all over

## PLH2-x

Pin Header 2.0mm 1 Row H=1.5/2.0mm Stack Straight Type

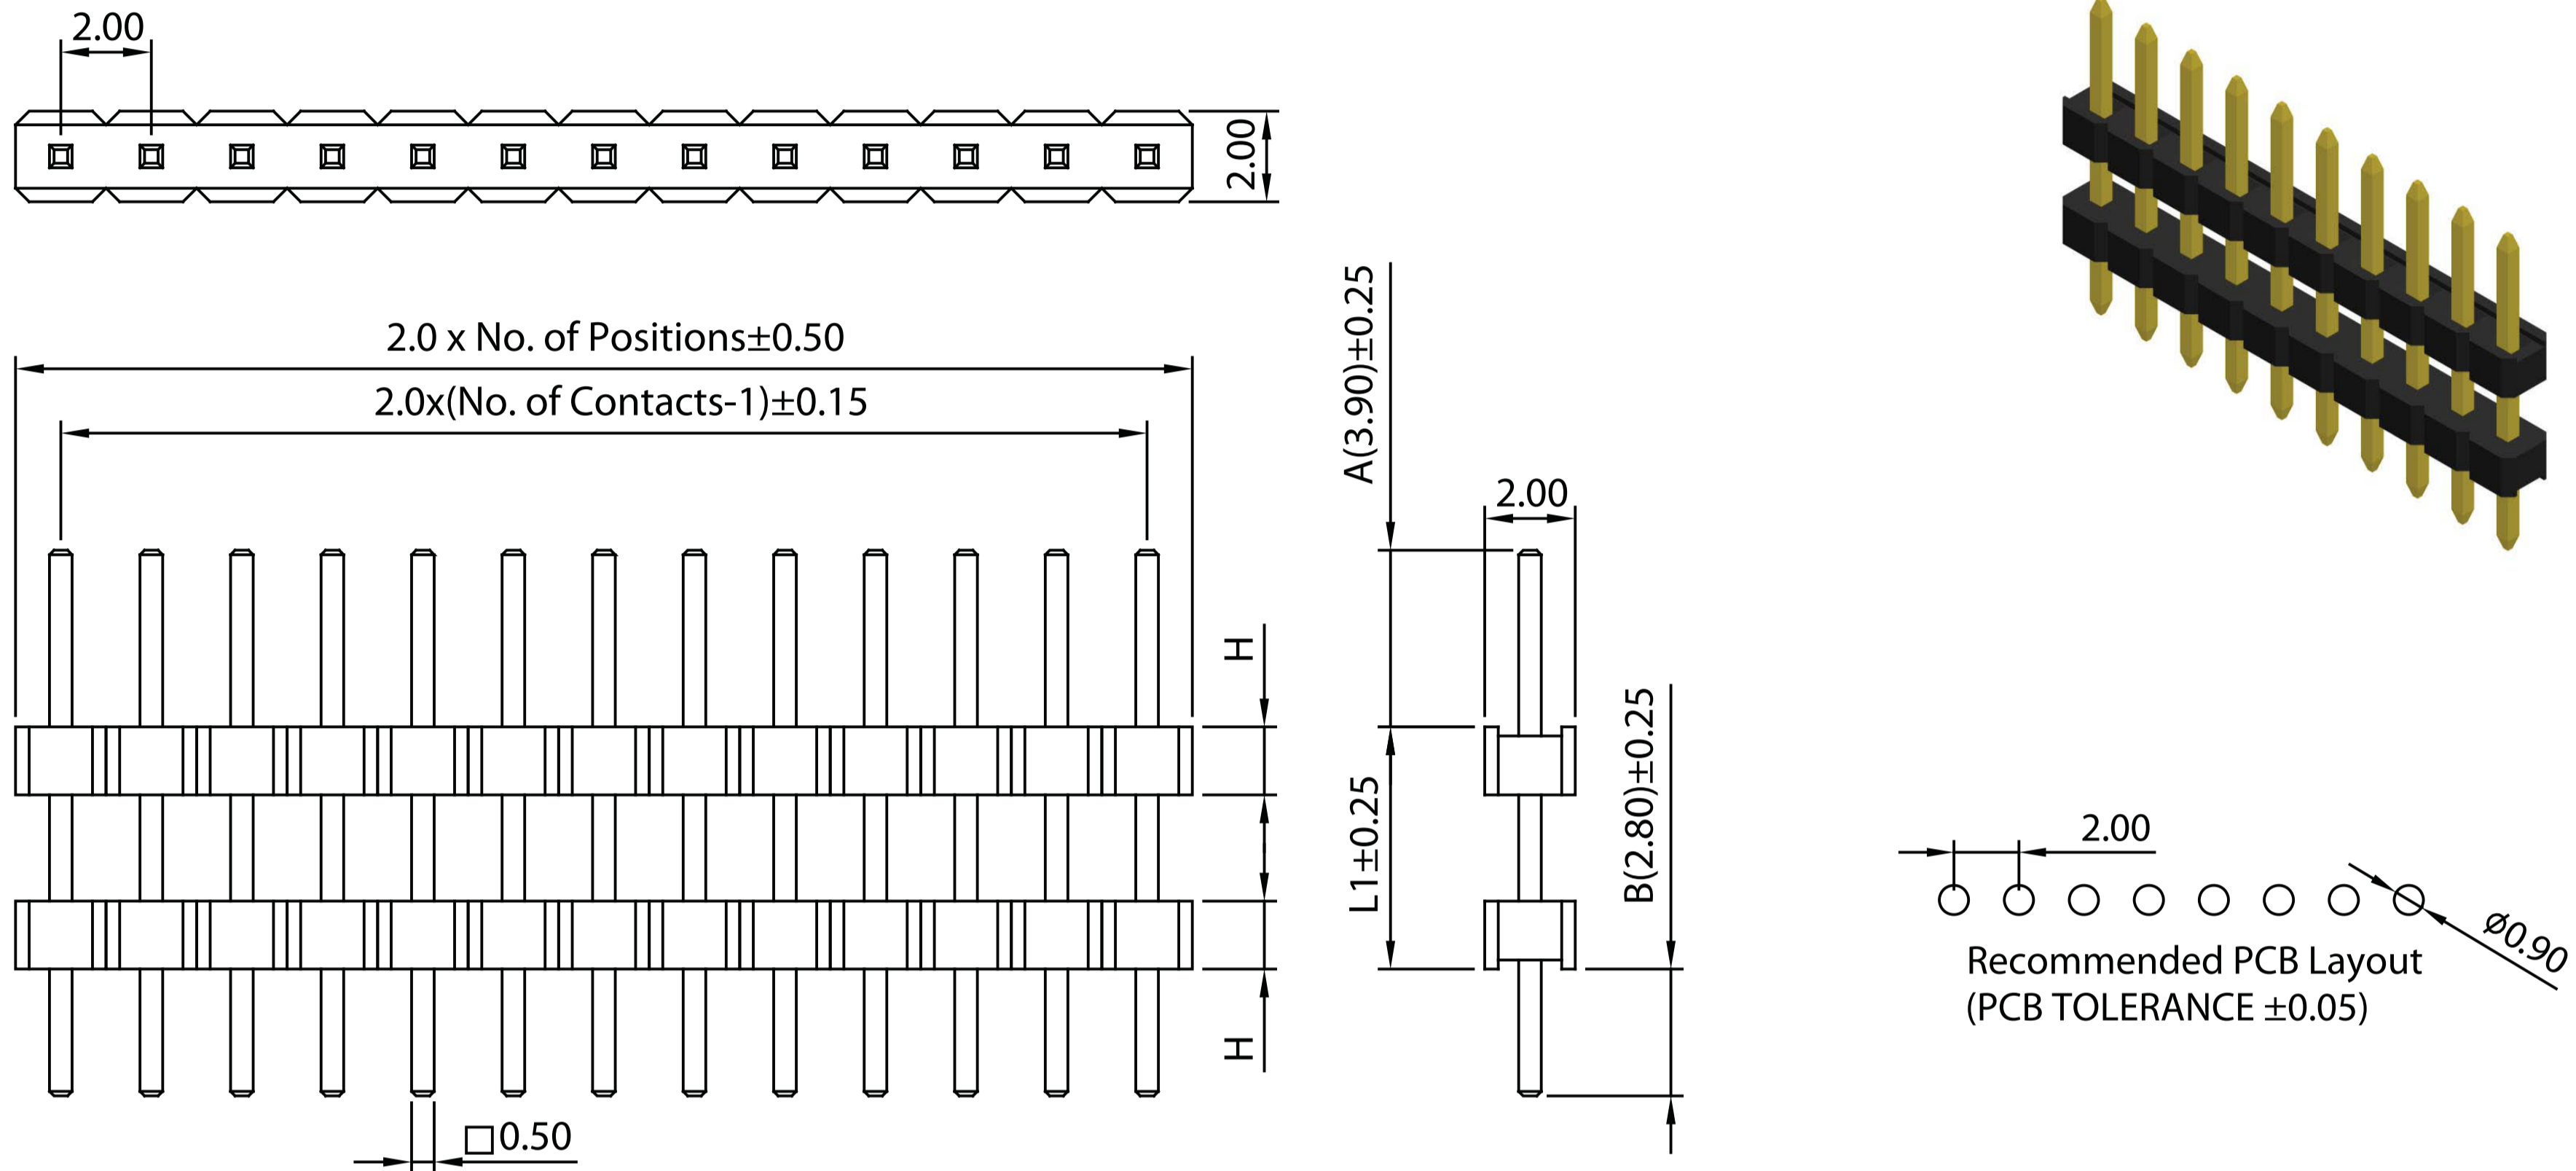

## PLHD2-x

Pin Header 2.0mm 2 Row H=1.5/2.0mm Stack Straight Type

