




WW130-F02 (10A)

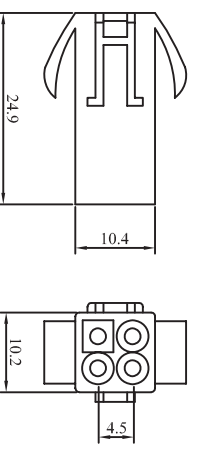


WW130-F04-1 (10A)

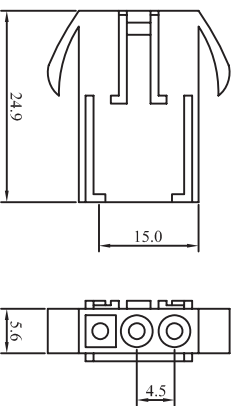


WW130-F03 (10A)

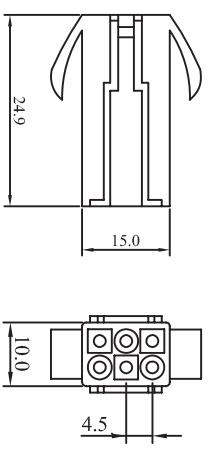


WW130-F06 (8A)

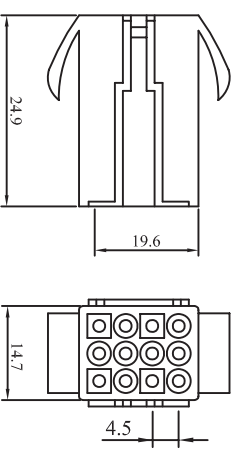


WW130-F12 (6A)

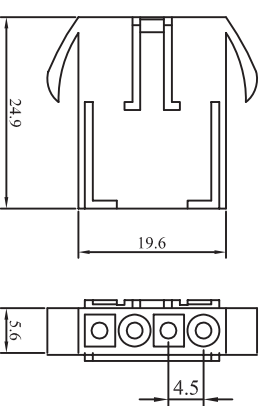

WW130-F04 (10A)

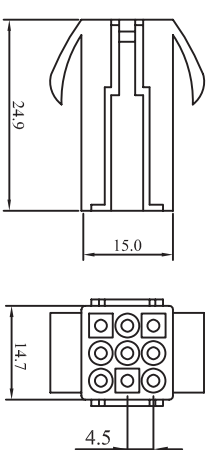

WW130-F09 (6A)

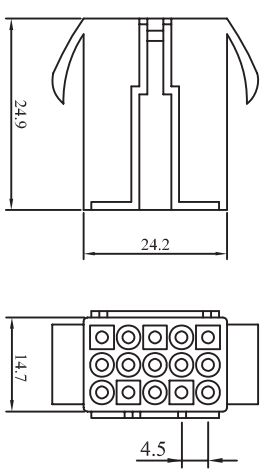

WW130-F15 (6A)

Material: Nylon 66 UL94V-0  
 Applicable panel thickness: 0.8 to 2.0 mm  
 Mate with: WW130-M Series housing  
 Current rating: 10A AC,DC Max  
 Voltage Rating: 300V AC,DC Max  
 Contact resistance: 10mΩ Max  
 Insulation resistance: 1000MΩ Min  
 Withstanding voltage : 1500V AC/Minute  
 Temperature range: -25° C to +85° C

Rev	Description/Date	Drawn By: Storm.li	Customer:	Third angle projection	Units: mm
△		Checked By: Simmon	Part No.: WW130-F Series		X.X ±0.25 X.XX ±0.1 X.XXX ±0.08
△		Approved By: Tony	Title: Housing		
SGS Report No.: KA/2004/80788/A-2					