

# HER1601CT THRU HER1608CT

## GLASS PASSIVATED HIGH EFFICIENCY RECTIFIERS

Reverse Voltage - 50 to 1000 V


Forward Current - 16 A

### Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0 utilizing Flame Retardant Epoxy Molding Compound.
- Low power loss, high efficiency.
- Low forward voltage, high current capability.
- High surge capacity.
- Ultra fast recovery times, high voltage.

### Mechanical Data

- **Case:** Molded plastic, TO-220
- **Epoxy:** UL 94V-0 rate flame retardant.
- **Terminals:** leads solderable per MIL-STD-202, method 208 guaranteed
- **Polarity:** As marked
- **Mounting Position:** Any

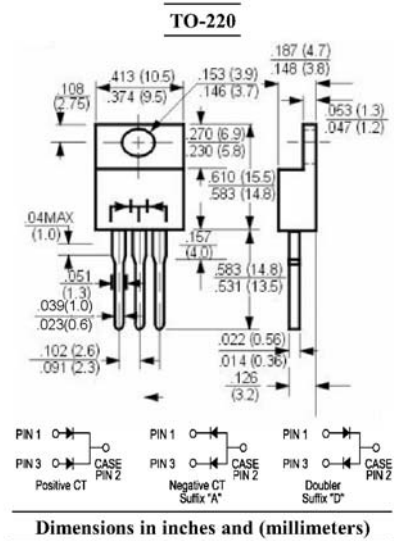

### Absolute Maximum Ratings and Characteristics


Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbols	HER 1601CT	HER 1602CT	HER 1603CT	HER 1604CT	HER 1605CT	HER 1606CT	HER 1607CT	HER 1608CT	Units	
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	300	400	600	800	1000	V	
Maximum RMS Voltage	$V_{RMS}$	35	70	140	210	280	420	560	700	V	
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	300	400	600	800	1000	V	
Maximum Average Forward Rectified Current at $T_C = 100\text{ }^\circ\text{C}$	$I_{F(AV)}$	16								A	
Peak Forward Surge Current 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	125								A	
Maximum Forward Voltage at 8 A DC	$V_F$	1		1.3			1.7			V	
Maximum Reverse Current at Rated DC Blocking Voltage	at $T_A = 25\text{ }^\circ\text{C}$	10								$\mu\text{A}$	
	at $T_A = 125\text{ }^\circ\text{C}$	500									
Typical Junction Capacitance <sup>1)</sup>	$C_J$	80					50				pF
Maximum Reverse Recovery Time <sup>2)</sup>	$t_{rr}$	50					80				ns
Typical Thermal Resistance <sup>3)</sup>	$R_{\theta JC}$	3								$^\circ\text{C/W}$	
Operating and Storage Temperature Range	$T_J, T_{stg}$	- 55 to + 150								$^\circ\text{C}$	

<sup>1)</sup> Measured at 1 MHz and applied reverse voltage of 4 VDC.

<sup>2)</sup> Reverse recovery test conditions:  $I_F = 0.5\text{ A}$ ,  $I_R = 1\text{ A}$ ,  $I_{rr} = 0.25\text{ A}$ .

<sup>3)</sup> Thermal resistance from junction to case per leg mounted on heatsink.



**SEMTECH ELECTRONICS LTD.**

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



# HER1601CT THRU HER1608CT

FIG.1- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

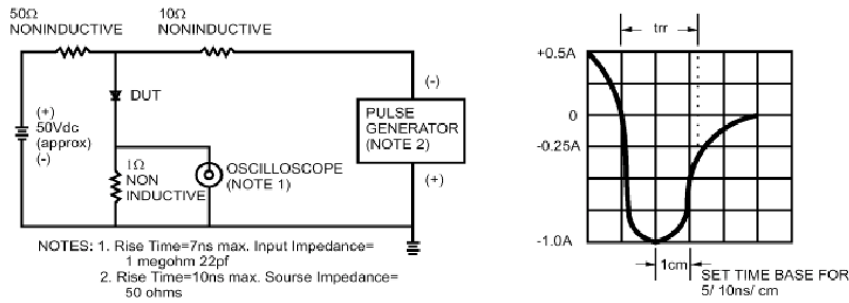


FIG.2- MAXIMUM FORWARD CURRENT DERATING CURVE

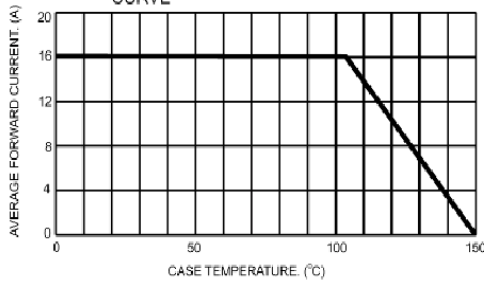


FIG.3- TYPICAL REVERSE CHARACTERISTICS PER LEG

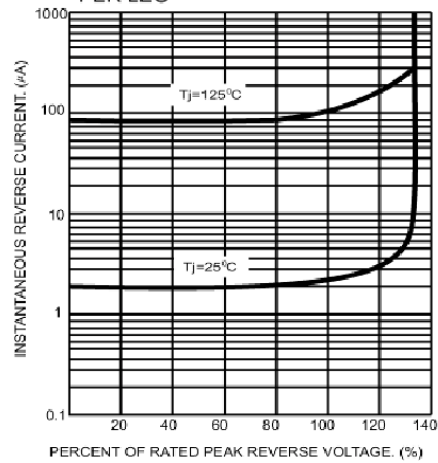


FIG.4- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

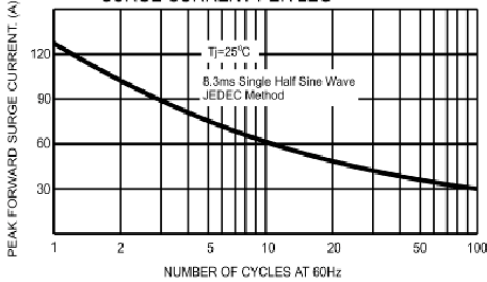


FIG.6- TYPICAL FORWARD CHARACTERISTICS PER LEG



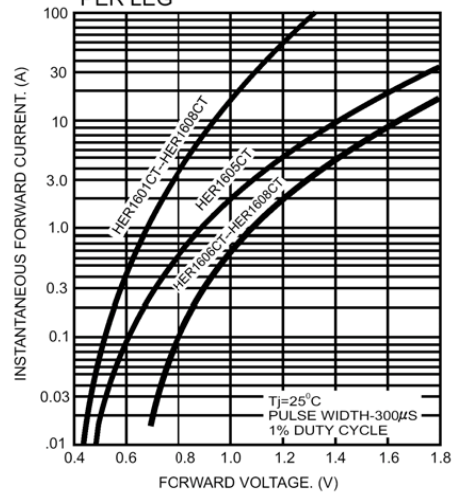


FIG.5- TYPICAL JUNCTION CAPACITANCE PER LEG



**SEMTECH ELECTRONICS LTD.**

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)

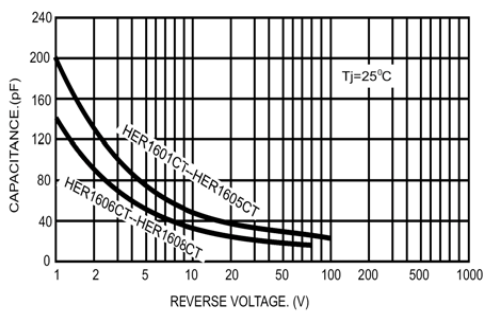