

GF1A THRU GF1M

SURFACE MOUNT GENERAL RECTIFIER

Reverse Voltage - 50 to 1000 V


Forward Current - 1 A

Features

- The plastic package carries UL flammability classification 94V-0
- For surface mounted applications
- Low reverse leakage
- Built-in strain relief, ideal for automated placement
- High forward surge current capability

Mechanical Data

- **Case:** SMA (DO-214AC) Molded plastic body
- **Terminals:** Solder plated, solderable per MIL-STD-750, method 2026
- **Polarity:** Color band denotes cathode end
- **Mounting Position:** Any

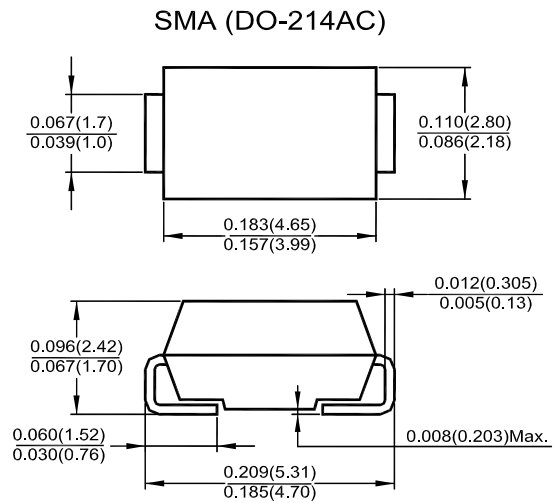

Dimensions in inches and (millimeters)


Maximum Ratings and Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase half-wave 60 Hz, resistive or inductive load, For capacitive load current derate by 20%.

Parameter	Symbol	GF1A	GF1B	GF1D	GF1G	GF1J	GF1K	GF1M	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at $T_L=110\text{ }^\circ\text{C}$	$I_{(AV)}$	1							A
Peak Forward Surge Current 8.3 ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	30							A
Maximum Instantaneous Forward Voltage at 1 A	V_F	1.1							V
Maximum DC Reverse Current at Rated DC Blocking Voltage	$T_A = 25\text{ }^\circ\text{C}$	5							μA
	$T_A = 100\text{ }^\circ\text{C}$	50							
Typical Junction Capacitance ¹⁾	C_J	15							pF
Typical Thermal Resistance ²⁾	$R_{\theta JA}$	75							$^\circ\text{C/W}$
Operating Junction and Storage Temperature Range	T_J, T_{stg}	- 65 to + 175							$^\circ\text{C}$

¹⁾ Measured at 1 MHz and applied reverse voltage of 4 V.

²⁾ P.C.B mounted with 0.2 X 0.2" (5 X 5 mm) copper pad areas.



SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103










ISO 14001:2004
Certificate No. 7116



ISO 9001:2000
Certificate No. 0506088

GF1A THRU GF1M

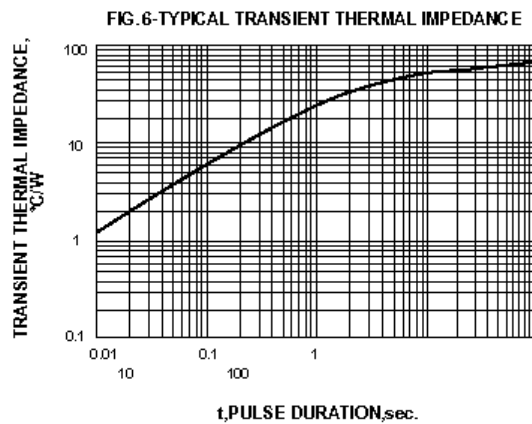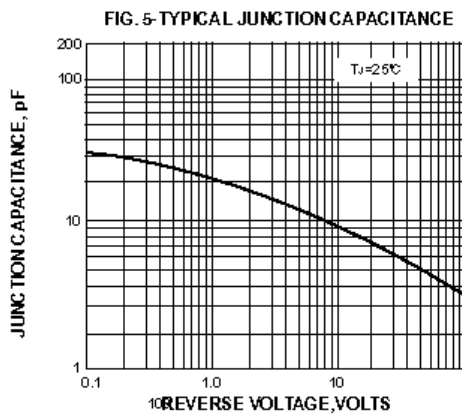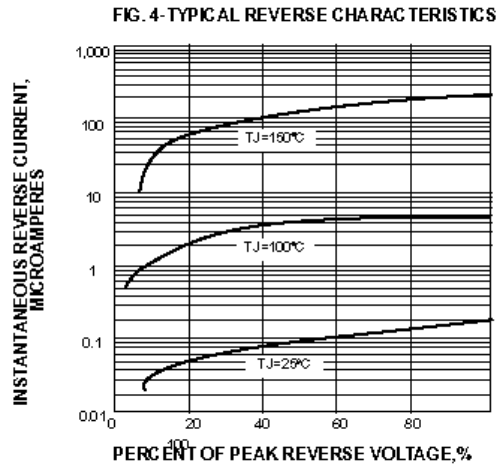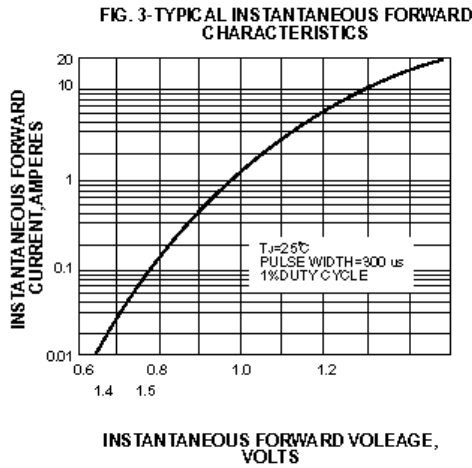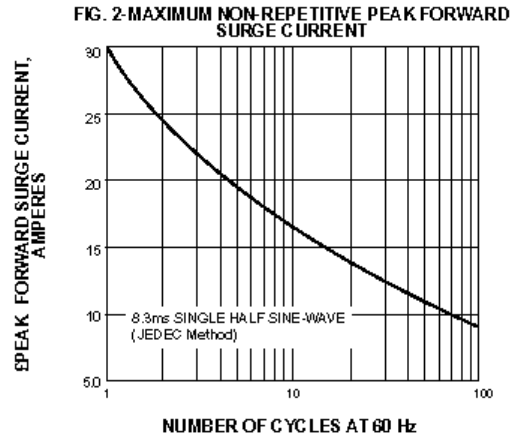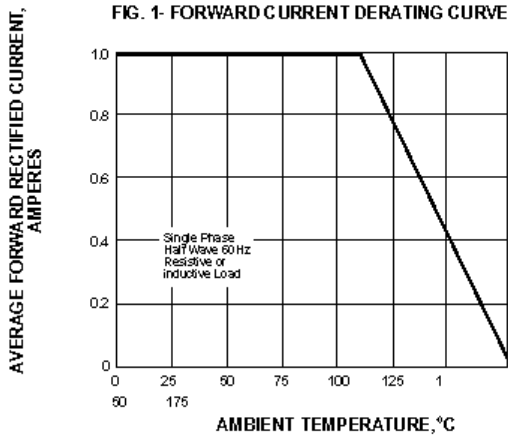

SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949:2002
Certificate No. 05103



ISO 14001:2004
Certificate No. 7116



ISO 9001:2000
Certificate No. 0506088