

UG2A THRU UG2D

SUPER FAST RECTIFIERS


Reverse Voltage – 50 to 200 Volts

Forward Current – 2.0 Amperes

Features

- Super fast switching for high efficiency
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
250°C/10 seconds, 0.375"(9.5mm) lead length,
5 lbs (2.3kg) tension

DO-15

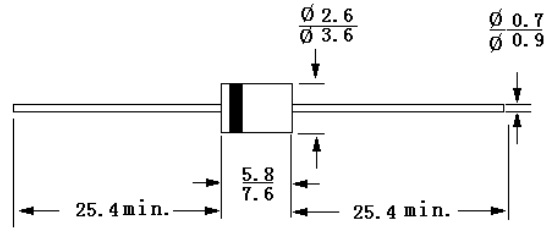

Mechanical Data


- **Case:** Molded plastic, JEDEC DO-15
- **Lead:** Plated axial leads, solderable per MIL-STD-750, method 2026 guaranteed
- **Polarity:** color band denotes cathode end
- **Mounting position:** Any
- **Weight:** 0.014 ounce, 0.4 gram

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Single-phase, half wave, 60Hz, resistive or inductive load, for current capacitive load current derate by 20%.


	Symbols	UG2A	UG2B	UG2C	UG2D	Units
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	150	200	V
Maximum RMS voltage	V_{RMS}	35	70	105	140	V
Maximum DC blocking voltage	V_{DC}	50	100	150	200	V
Maximum average forward rectified current .375"(9.5mm) lead length at $T_A = 55^\circ\text{C}$	$I_{(AV)}$	2.0				A
Peak forward surge current , 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	80.0				A
Maximum instantaneous forward voltage @ 2.0A	V_F	0.95				V
Maximum DC reverse current @ $T_A = 25^\circ\text{C}$	I_R	5.0				μA
at rated DC blocking voltage @ $T_A = 100^\circ\text{C}$	I_R	50.0				μA
Maximum reverse recovery time (Note 1)	T_{rr}	35				nS
Typical junction capacitance (Note 2)	C_J	15.0				pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	15.0				$^\circ\text{C/W}$
Operating temperature range	T_J	-65 to +150				$^\circ\text{C}$
Storage temperature range	T_S	-65 to +150				$^\circ\text{C}$

- Note: 1. Reverse recovery test conditions: $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{rr} = 0.25\text{A}$.
 2. Measured at 1 MHz and applied reverse voltage of 4.0 Volts D.C.
 3. Thermal Resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted.



SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



ISO/TS 16949 : 2002
Certificate No. 05103



ISO 14001
Certificate No. 7116



ISO 9001 : 2000
Certificate No. 550-159-04-02-04

Dated : 22/07/2004

UG2A THRU UG2D

FIG.1-FORWARD CURRENT DERATING CURVE

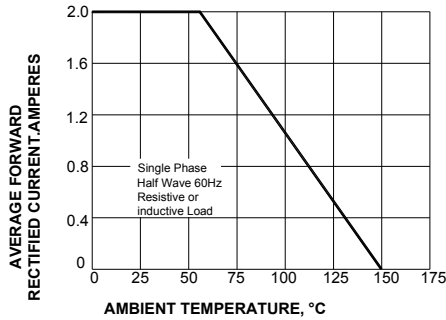


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

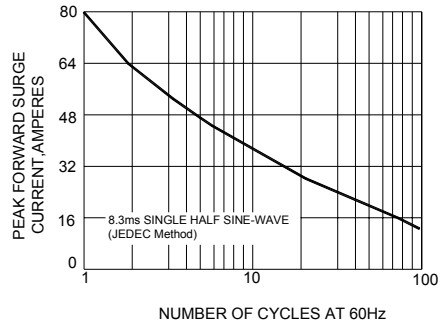


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

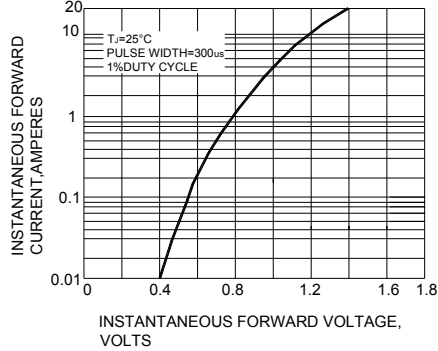


FIG.4-TYPICAL REVERSE CHARACTERISTICS

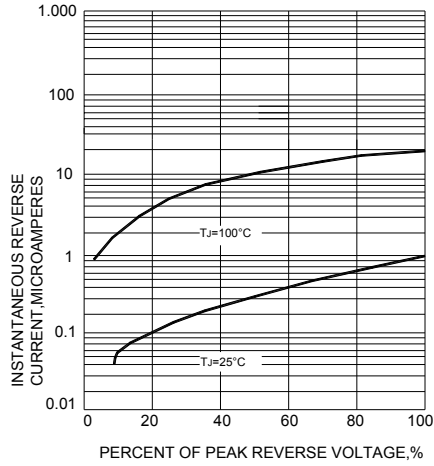


FIG.5-TYPICAL JUNCTION CAPACITANCE



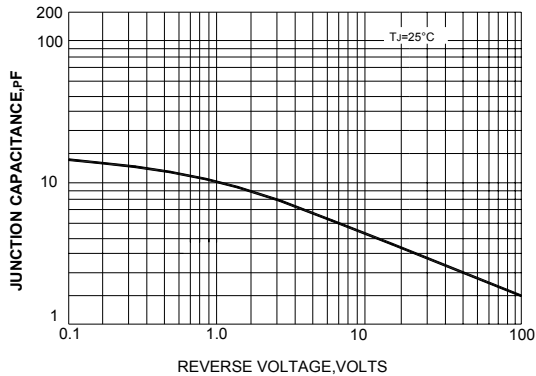


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE



SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)

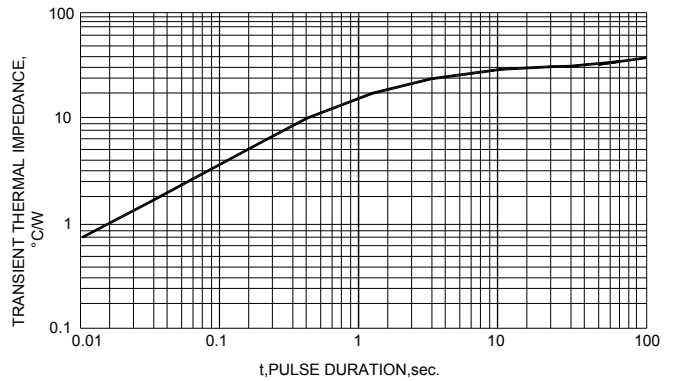