
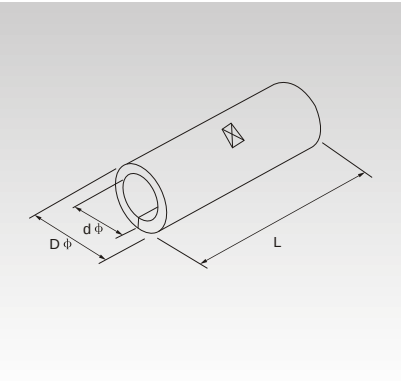


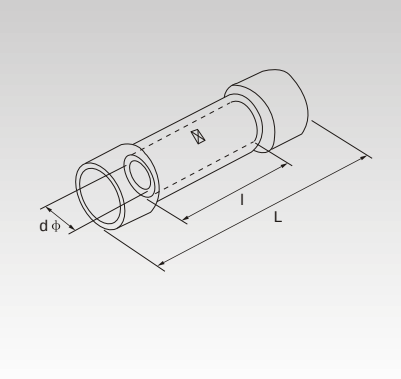

Material: Copper Insulating Material:PVC								
BEISIT NO.	TYPE	Conductor section		DIMENSION			Imax	Color
		AWG	mm ²	I	dφ	L		
BT012-558	BV 1.25	22-16	0.5-1.5	15.0	1.7	26.0	19A	red
BT012-559	BV 2	16-14	1.5-2.5	15.0	2.3	26.0	27A	blue
BT012-560	BV 5.5	12-10	4-6	15.0	3.4	26.0	48A	yellow
BT012-561	BV 8	#8	6-10	21.0	4.5	32.0	62A	red
BT012-562	BV 14	#6	10-16	26.0	5.8	42.0	88A	blue
BT012-563	BV 22	#4	16-25	29.0	7.7	50.0	115A	yellow
BT012-564	BV 38	#2	35-50	32.0	9.4	55.0	160A	red

長形全絕緣中間接頭（TL-JTK型）
SHORT FULL INSULATING MIDDLE JOINT(TYPE TL-JTK)

Material: Copper Insulating Material:PVC								
BEISIT NO.	TYPE	Conductor section		DIMENSION			Imax	Color
		AWG	mm ²	I	dφ	L		
BT012-565	PVT 1.25	22-16	0.5-1.5	8.0	1.7	16.0	19A	red
BT012-566	PVT 2	16-14	1.5-2.5	8.0	2.3	16.0	27A	blue
BT012-567	PVT 5.5	12-10	4-6	8.0	3.4	20.5	48A	yellow

中間裸接頭（TL型）
NAKED TERMINAL IN THE MIDDLE

Material: Copper						
BEISIT NO.	TYPE	Conductor section		DIMENSION		
		AWG	mm ²	Dφ	dφ	L
BT012-568	BN 1.25	22-16	0.5-1.5	3.3	1.7	15.0
BT012-569	BN 2	16-14	1.5-2.5	4.0	2.3	15.0
BT012-570	BN 3.5	14-12	2.5-4	5.0	3.0	15.0
BT012-571	BN 5.5	12-10	4-6	5.5	3.4	15.0
BT012-572	BN 8	#8	10	7.1	4.5	21.0
BT012-573	BN 14	#6	16	9.0	5.8	26.0
BT012-574	BN 22	#4	25	11.4	7.7	29.0
BT012-575	BN 38	#2	35	13.3	9.4	32.0
BT012-576	BN 60	1/0	50	15.4	11.4	36.0
BT012-577	BN 70	2/0	70	17.5	13.3	37.0
BT012-578	BN 80	3/0	95	19.4	14.5	38.0
BT012-579	BN 100	4/0	120	22.0	16.4	38.0
BT012-580	BN 150	250-300MCM	150	26.5	19.5	54.0
BT012-581	BN 180	300-3540MCM	185	28.5	21.0	57.0
BT012-582	BN 200	400MCM	240	32.5	24.0	63.0
BT012-583	BN 325	500-600MCM	300	37.0	28.0	72.0



Conductor section:0.5-1.5mm ² (A.W.G22~ 16) Imax=10A Material: Brass								
BEISIT NO.	TYPE	Thickness of material	DIMENSION					Color
			b φ	F	Dφ	H	L	
BT012-584	MPD 1.25-156	0.4	4.0	11.0	1.7	10.0	21.0	red

Conductor section:1.5-2.5mm ² (A.W.G16~ 14) Imax=15A Material:Brass								
BEISIT NO.	TYPE	Thickness of material	DIMENSION					Color
			b φ	F	Dφ	H	L	
BT012-585	MPD 2-156	0.4	4.0	11.0	2.3	10.0	21.0	blue
BT012-586	MPD 2-196	0.4	5.0	11.0	2.3	10.0	21.0	

Conductor section:4-6mm ² (A.W.G12~ 10) Imax=24A Material:Brass								
BEISIT NO.	TYPE	Thickness of material	DIMENSION					Color
			b φ	F	Dφ	H	L	
BT012-587	MPD 5.5-195	0.4	5.0	12.0	3.4	13.0	25.0	yellow

子彈形母預絕緣接頭
BULLET SHAPED FEMALE INSULATING JOINT

Conductor section:0.5-1.5mm ² (A.W.G22~ 16) Imax=10A Material:Brass								
BEISIT NO.	TYPE	Thickness of material	DIMENSION					Color
			b φ	B φ	Dφ	H	L	
BT012-588	FRD 1.25-156	0.4	4.0	6.3	1.7	13.0	24.5	red

Conductor section:1.5-2.5mm ² (A.W.G16~ 14)Imax=15A Material:Brass								
BEISIT NO.	TYPE	Thickness of material	DIMENSION					Color
			b φ	B φ	Dφ	H	L	
BT012-589	FRD 2-156	0.4	4.0	6.3	2.3	14.0	24.5	blue
BT012-590	FRD 2-195	0.4	5.0	7.0	2.3	14.0	25.5	

Conductor section:4-6mm ² (A.W.G12~ 10)Imax=24A Material:Brass								
BEISIT NO.	TYPE	Thickness of material	DIMENSION					Color
			b φ	B φ	Dφ	H	L	
BT012-591	FRD 5.5-195	0.4	5.0	7.0	3.4	14.0	29.5	yellow

