
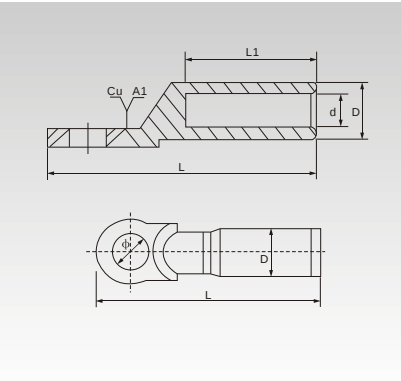


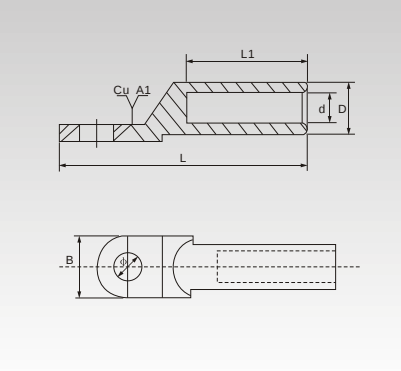

用途

DTL 系列銅鋁接綫端子適用於配電裝置中各種圓型、半圓扇型鋁綫、電力電纜與電氣設備銅端的過渡連接。使用鋁材爲L3，銅材爲T2。產品採用摩擦焊工藝制造，具有焊縫強調高，通電性能好，抗電化腐蝕，使用壽命長等特點。

APPLICATION

DTL series of copper - aluminum wiring terminals are suitable for transition connection of the circular aluminium wires, hemicycle - sector aluminium wires, power supply cables in the distribution equipment and copper terminals of the dlectrical equipment. The material of aluminium and copper is that of L3 and T2 respectively. The technology of friction welding is wonderfully adopted. The refore they have disinguishing features of strong weld intensity, good nature in electrification, resistant galvanic corrosion and long service life.

BEISIT NO.	TYPE	φ	D	d	L	L1	B
BT012-942	DTL-1-10	8.5	10	6	68	28	16
BT012-943	DTL-1-16	8.5	11	6	70	30	16
BT012-944	DTL-1-25	8.5	12	7	75	34	18
BT012-945	DTL-1-35	10.5	14	8.5	85	38	20.5
BT012-946	DTL-1-50	10.5	16	9.5	90	40	23
BT012-947	DTL-1-70	12.5	18	11.5	102	48	26
BT012-948	DTL-1-95	12.5	21	13.5	112	50	28
BT012-949	DTL-1-120	14.5	23	15	120	53	30
BT012-950	DTL-1-150	14.5	25	16.5	126	56	34
BT012-951	DTL-1-185	16.5	27	18.5	133	58	37
BT012-952	DTL-1-240	16.5	30	21	140	60	40
BT012-953	DTL-1-300	21	34	23.5	160	65	50
BT012-954	DTL-1-400	21	38	27	170	70	50
BT012-955	DTL-1-500	21	47	29	225	75	60
BT012-956	DTL-1-630	-	54	35	245	80	80
BT012-957	DTL-1-800	-	60	38	270	90	100

BEISIT NO.	TYPE	φ	D	d	L	L1
BT012-958	DTL-2-16	13	16	5.5	87	42
BT012-959	DTL-2-25	13	16	6.5	87	42
BT012-960	DTL-2-35	13	16	8	87	42
BT012-961	DTL-2-50	13	20	9	87	43
BT012-962	DTL-2-70	13	20	11	87	43
BT012-963	DTL-2-95	13	20	12.5	87	43
BT012-964	DTL-2-120	13	25	13.5	111	60
BT012-965	DTL-2-150	13	25	15.5	111	60
BT012-966	DTL-2-185	13	32	17.5	116	60
BT012-967	DTL-2-240	13	32	19.5	116	60
BT012-968	DTL-2-300	13	34	22.5	120	62

