


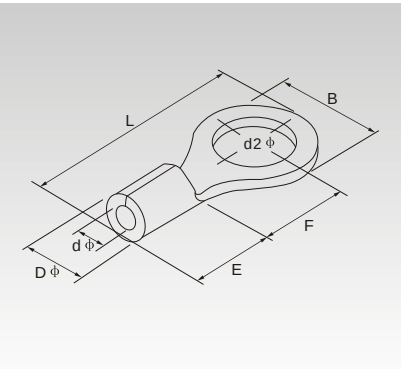

Conductor section:150-185mm²(A.W.G250/300MCB)Imax=395A Material: Copper Thickness:3.2mm

BEISIT NO.	TYPE	American Bolt number	d2φ (mm)	DIMENSION								
				B	L	F	E	Dφ	dφ			
				mm	mm	mm	mm	mm	mm			
BT012-353	RNB 150-8	5/16	8.4	36.0	66.0	23.0	27.0	26.6	19.5			
BT012-354	RNB 150-10	3/8	10.5									
BT012-355	RNB 150-11	7/16	11.5									
BT012-356	RNB 150-12	1/ 2	13.0									
BT012-357	RNB 150-14	9/16	15.0									
BT012-358	RNB 150-16	5/8	17.0	36.0	81.0	36.0						
BT012-359	RNB 150-18	11/16	19.0									
BT012-360	RNB 150-20	3/4	21.0									
BT012-361	RNB 150-22	7/8	23.0									
BT012-362	RNB 150-24	15/16	25.0									
BT012-363	RNB 150-27	1	28.0									

Conductor section:185-240mm²(A.W.G300/350MCB)Imax=440A Material: Copper Thickness:3.5mm

BEISIT NO.	TYPE	American Bolt number	d2φ (mm)	DIMENSION								
				B	L	F	E	Dφ	dφ			
				mm	mm	mm	mm	mm	mm			
BT012-364	RNB 180-8	5/16	8.4	38.5	69.0	24.5	28.5	28.6	21.0			
BT012-365	RNB 180-10	3/8	10.5									
BT012-366	RNB 180-11	7/16	11.5									
BT012-367	RNB 180-12	1/ 2	13.0									
BT012-368	RNB 180-14	9/16	15.0									
BT012-369	RNB 180-16	5/8	17.0	38.5	86.6	39.5						
BT012-370	RNB 180-18	11/16	19.0									
BT012-371	RNB 180-20	3/4	21.0									
BT012-372	RNB 180-22	7/8	23.0									
BT012-373	RNB 180-24	15/16	25.0									
BT012-374	RNB 180-27	1	28.0									

Conductor section:240-300mm²(A.W.G400/500MCB)Imax=470A Material: Copper Thickness:3.9mm

BEISIT NO.	TYPE	American Bolt number	d2φ (mm)	DIMENSION								
				B	L	F	E	Dφ	dφ			
				mm	mm	mm	mm	mm	mm			
BT012-375	RNB 200-8	5/16	8.4	44.0	72.0	24.5	31.5	32.6	24.0			
BT012-376	RNB 200-10	3/8	10.5									
BT012-377	RNB 200-11	7/16	11.5									
BT012-378	RNB 200-12	1/ 2	13.0									
BT012-379	RNB 200-14	9/16	15.0									
BT012-380	RNB 200-16	5/8	17.0	44.0	91.0	37.5						
BT012-381	RNB 200-18	11/16	19.0									
BT012-382	RNB 200-20	3/4	21.0									
BT012-383	RNB 200-22	7/8	23.0									
BT012-384	RNB 200-24	15/16	25.0									
BT012-385	RNB 200-27	1	28.0									

Conductor section:300-400mm²(A.W.G500/600MCB)Imax=650A Material: Copper Thickness:4.2mm

BEISIT NO.	TYPE	American Bolt number	d2φ (mm)	DIMENSION								
				B	L	F	E	Dφ	dφ			
				mm	mm	mm	mm	mm	mm			
BT012-386	RNB 325-8	5/16	8.4	50.5	88.0	33.5	35.5	37.1	28.0			
BT012-387	RNB 325-10	3/8	10.5									
BT012-388	RNB 325-11	7/16	11.5									
BT012-389	RNB 325-12	1/ 2	13.0									
BT012-390	RNB 325-14	9/16	15.0									
BT012-391	RNB 325-16	5/8	17.0	50.5	105.7	45.0						
BT012-392	RNB 325-18	11/16	19.0									
BT012-393	RNB 325-20	3/4	21.0									
BT012-394	RNB 325-22	7/8	23.0									
BT012-395	RNB 325-24	15/16	25.0									
BT012-396	RNB 325-27	1	28.0									



Umax:105℃ Ui=300V Material:CopperPipe Insulating Material:Nylon(多種顏色)

BEISIT NO.	TYPE	DIMENSION						mm²	Color of insulation sheath(Top)Germany (Bottom)France
		F	L	W	Dφ	Cφ	A.W.G		
		mm	mm	mm	mm	mm	mm		
BT012-397	E 0506	6.0	12.0	2.6	1.3	1.0	#22	0.5	Orange white
BT012-398	E 0508	8.0	14.0						
BT012-399	E 0510	10.0	16.0						
BT012-400	E 0512	12.0	18.0						
BT012-401	E 7506	6.0	12.4	2.8	1.5	1.2	#20	0.75	white blue
BT012-402	E 7508	8.0	14.6						
BT012-403	E 7510	10.0	16.4						
BT012-404	E 7512	12.0	18.4						
BT012-405	E 1006	6.0	12.4	3.0	1.7	1.4	#18	1.0	yellow red
BT012-406	E 1008	8.0	14.6						
BT012-407	E 1010	10.0	16.4						
BT012-408	E 1012	12.0	18.4						
BT012-409	E 1508	8.0	14.6	3.5	2.0	1.7	#16	1.5	red black
BT012-410	E 1510	10.0	16.4						
BT012-411	E 1512	12.0	18.4						
BT012-412	E 1518	18.0	24.4						
BT012-413	E 2508	8.0	15.2	4.0	2.6	2.3	#14	2.5	blue gray
BT012-414	E 2510	10.0	17.2						
BT012-415	E 2512	12.0	19.2						
BT012-416	E 2518	18.0	25.2						
BT012-417	E 4009	9.0	16.5	4.4	3.2	2.8	#12	4.0	gray orange
BT012-418	E 4012	12.0	19.5						
BT012-419	E 4018	18.0	25.5						
BT012-420	E 6010	10.0	18.0	6.3	3.9	3.5	#10	6.0	black green
BT012-421	E 6012	12.0	20.0						
BT012-422	E 6018	18.0	26.0						
BT012-423	E 10-12	12.0	21.5	7.6	4.9	4.5	#7	10.0	Ivory brown
BT012-424	E 10-18	18.0	27.5						
BT012-425	E 16-12	12.0	22.2	8.8	6.2	5.8	#5	16.0	green Ivory
BT012-426	E 16-18	18.0	28.2						
BT012-427	E 25-16	16.0	29.0	11.2	7.9	7.5	#4	25.0	brown black
BT012-428	E 25-22	22.0	35.0						
BT012-429	E 35-16	16.0	30.0	12.7	8.7	8.3	#2	35.0	dust-colour
BT012-430	E 35-25	25.0	39.0						
BT012-431	E 50-20	20.0	36.0	15.3	10.9	10.3	#1	50.0	olives clolr
BT012-432	E 50-25	25.0	41.0						

