
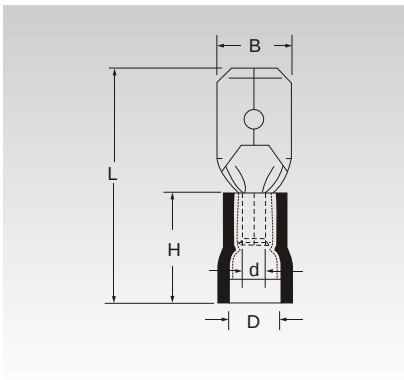


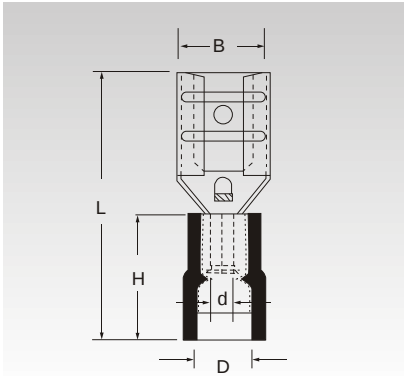

Conductor section:0.5-1.5mm ² (A.W.G22~ 16) I _{max} =10A Material: Brass									
BEISIT NO.	TYPE	Nema Tab (mm)	Thickness of material (mm)	DIMENSION					color
				B	D φ	d φ	L	H	
				mm	mm	mm	mm	mm	
BT012-066	EFDD 1.25-250	0.8 × 6.35	0.4	7.4	3.8	1.7	21.0	10.0	red

Conductor section:1.5-2.5mm ² (A.W.G16~ 14) I _{max} =15A Material: Brass									
BEISIT NO.	TYPE	Nema Tab (mm)	Thickness of material (mm)	DIMENSION					color
				B	D φ	d φ	L	H	
				mm	mm	mm	mm	mm	
BT012-067	EFDD 2-250	0.8 × 6.35	0.4	7.4	4.3	2.3	21.0	10.0	blue

Conductor section:4-6mm ² (A.W.G12~ 10) I _{max} =24A Material: Brass									
BEISIT NO.	TYPE	Nema Tab (mm)	Thickness of material (mm)	DIMENSION					color
				B	D φ	d φ	L	H	
				mm	mm	mm	mm	mm	
BT012-068	EFDD 5.5-250	0.8 × 6.35	0.4	7.4	5.7	3.4	25.0	13.0	yellow

公預絕緣端頭（雙壓易進式）
MALE PRE-INSULATING JOINT(INSIDE COLLAR)
EASY ENTRY COPPER SLEEVE

Conductor section:0.5-1.5mm ² (A.W.G22~ 16) I _{max} =10A Material: Brass									
BEISIT NO.	TYPE	Nema Tab (mm)	Thickness of material (mm)	DIMENSION					color
				B	D φ	d φ	L	H	
				mm	mm	mm	mm	mm	
BT012-069	EMDD 1.25-250	0.8 × 6.35	0.4 × 0.2	6.35	4.3	1.7	21.0	10.0	red

Conductor section:1.5-2.5mm ² (A.W.G16~ 14) I _{max} =15A Material: Brass									
BEISIT NO.	TYPE	Nema Tab (mm)	Thickness of material (mm)	DIMENSION					color
				B	D φ	d φ	L	H	
				mm	mm	mm	mm	mm	
BT012-070	EMDD 2-250	0.8 × 6.35	0.4 × 0.2	6.35	4.3	2.3	21.0	10.0	blue

Conductor section:4-6mm ² (A.W.G12~ 10) I _{max} =24A Material: Brass									
BEISIT NO.	TYPE	Nema Tab (mm)	Thickness of material (mm)	DIMENSION					color
				B	D φ	d φ	L	H	
				mm	mm	mm	mm	mm	
BT012-071	EMDD 5.5-250	0.8 × 6.35	0.4 × 0.2	6.35	5.7	3.4	25.0	13.0	yellow



Conductor section:0.5-1.5mm ² (A.W.G22~ 16) I _{max} =10A Material: Brass								
BEISIT NO.	TYPE	Nema Tab (mm)	DIMENSION					
			B	B1	H	D φ	d φ	L
			mm	mm	mm	mm	mm	mm
BT012-072	EFBDD 1.25-250	0.8 × 6.35	7.4	6.35	10.0	3.8	1.7	21.5

Conductor section:1.5-2.5mm ² (A.W.G16~ 14) I _{max} =15A Material: Brass								
BEISIT NO.	TYPE	Nema Tab (mm)	DIMENSION					
			B	B1	H	D φ	d φ	L
			mm	mm	mm	mm	mm	mm
BT012-073	EFBDD 2-250	0.8 × 6.35	7.4	6.35	10.0	4.3	2.3	21.5

Conductor section:4-6mm²(A.W.G12~ 10) I _{max} =24A Material: Brass								
BEISIT NO.	TYPE	Nema Tab (mm)	DIMENSION					
			B	B1	H	D φ	d φ	L
			mm	mm	mm	mm	mm	mm
BT012-074	EFBDD 5.5-250	0.8 × 6.35	7.4	6.35	13.0	5.7	3.4	25.0

子彈形公預絕緣接頭（雙壓易進式）
BULLET SHAPED MALE PRE-INSULATING JOINT(INSIDE COLLAR)
EASY ENTRY COPPER SLEEVE

Conductor section:0.5-1.5mm ² (A.W.G22~ 16) I _{max} =10A Material: Brass								
BEISIT NO.	TYPE	Thickness of material (mm)	DIMENSION					color
			b φ	F	D φ	H	L	
			mm	mm	mm	mm	mm	
BT012-075	EMPD 1.25-156	0.4	4.0	11.0	1.7	10.0	21.0	red

Conductor section:1.5-2.5mm ² (A.W.G16~ 14) I _{max} =15A Material: Brass								
BEISIT NO.	TYPE	Thickness of material (mm)	DIMENSION					color
			b φ	F	D φ	H	L	
			mm	mm	mm	mm	mm	
BT012-076	EMPD 2-156	0.4	4.0	11.0	2.3	10.0	21.0	blue
BT012-077	EMPD 2-196	0.4	5.0	11.0	2.3	10.0		

Conductor section:4-6mm ² (A.W.G12~ 10) I _{max} =24A Material: Brass								
BEISIT NO.	TYPE	Thickness of material (mm)	DIMENSION					color
			b φ	F	D φ	H	L	
			mm	mm	mm	mm	mm	
BT012-078	EMPD 5-195	0.4	5.0	12.0	3.4	13.0	25.0	yellow

