




Umax:1 Ui=300V Material:CopperPipe

BEISIT NO.	TYPE	DIMENSION				A.W.G	Conductor section mm ²
		L	Dφ	Cφ	W		
		mm	mm	mm	mm		
BT012-433	EN 0506	6.0	1.3	1.0	1.7	#22	0.5
BT012-434	EN 0508	8.0					
BT012-435	EN 0510	10.0					
BT012-436	EN 0512	12.0					
BT012-437	EN 7506	6.0					
BT012-438	EN 7508	8.0	1.5	1.2	1.9	#20	0.75
BT012-439	EN 7510	10.0					
BT012-440	EN 7512	12.0					
BT012-441	EN 1006	6.0	1.8	1.4	2.2	#18	1.0
BT012-442	EN 1008	8.0					
BT012-443	EN 1010	10.0					
BT012-444	EN 1012	12.0					
BT012-445	EN 1507	7.0					
BT012-446	EN 1508	8.0	2.0	1.7	2.5	#16	1.5
BT012-447	EN 1510	10.0					
BT012-448	EN 1512	12.0					
BT012-449	EN 1518	18.0					
BT012-450	EN 2507	7.0					
BT012-451	EN 2508	8.0	2.6	2.2	3.3	#14	2.5
BT012-452	EN 2510	10.0					
BT012-453	EN 2512	12.0					
BT012-454	EN 2518	18.0					
BT012-455	EN 4009	9.0					
BT012-456	EN 4012	12.0	3.2	2.8	3.9	#12	4.0
BT012-457	EN 4018	18.0					
BT012-458	EN 6010	10.0					
BT012-459	EN 6012	12.0	3.9	3.5	4.8	#10	6.0
BT012-460	EN 6015	15.0					
BT012-461	EN 6018	18.0					
BT012-462	EN 10-12	12.0	4.9	4.5	5.8	#7	10.0
BT012-463	EN 10-15	15.0					
BT012-464	EN 10-18	18.0					
BT012-465	EN 16-12	12.0	6.2	5.8	7.2	#5	16.0
BT012-466	EN 16-15	15.0					
BT012-467	EN 16-18	18.0					
BT012-468	EN 25-16	16.0	7.9	7.5	9.1	#4	25.0
BT012-469	EN 25-22	22.0					
BT012-470	EN 35-16	16.0					
BT012-471	EN 35-25	25.0	8.7	8.3	10.2	#2	35.0
BT012-472	EN 50-20	20.0					
BT012-473	EN 50-25	25.0					

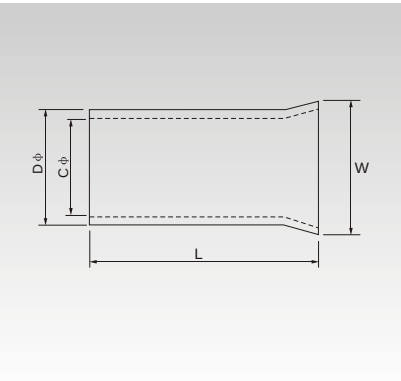

Umax:105℃ Ui=300V Material:CopperPipe Insulating Cover Material:Nylon

BEISIT NO.	TYPE	Conductor mm ²	DIMENSION						Color	
			F	L	W	B	Dφ	Cφ	German	French
			mm	mm	mm	mm	mm	mm		
BT012-474	TE 0508	2 × 0.5	8.0	14.5	5.0	6.5	1.8	1.5	White	White
BT012-475	TE 7508	2 × 0.75	8.0	14.7	5.5	6.7	2.1	1.8	blue	gray
BT012-476	TE 7510	2 × 0.75	10.0	16.7	5.5	6.7	2.1	1.8		
BT012-477	TE 1008	2 × 1.0	8.0	15.1	5.5	7.1	2.3	2.0	red	red
BT012-478	TE 1010	2 × 1.0	10.0	17.1	5.5	7.1	2.3	2.0		
BT012-479	TE 1508	2 × 1.5	8.0	15.5	6.4	7.2	2.6	2.3	black	blue
BT012-480	TE 1512	2 × 1.5	12.0	19.5	6.4	7.5	2.6	2.3		
BT012-481	TE 2510	2 × 2.5	10.0	18.5	8.0	8.5	3.3	2.9	gray	blue
BT012-482	TE 2513	2 × 2.5	13.0	21.5	8.0	8.5	3.3	2.9		
BT012-483	TE 4012	2 × 4.0	12.0	23.1	8.8	11.1	4.2	3.8	orange	gray
BT012-484	TE 6014	2 × 6.0	14.0	26.1	9.5	12.1	5.3	4.9	green	yellow
BT012-485	TE 10-14	2 × 10.0	14.0	26.6	12.6	12.0	6.9	6.5	brown	red
BT012-486	TE 16-14	2 × 16.0	14.0	31.3	19.0	17.3	8.7	8.3	Ivory	blue

快速連接接頭
FAST CONNECTING JOINT

1max:22-18 A.W.G:10 18-14 A.W.G:15A 12-10A.W.G24A
Umax:105℃ Ui=600V Material:brass Insulating Material:PP

BEISIT NO.	TYPE	DIMENSION		A.W.G mm ²	Color
		W	L		
		mm	mm		
BT012-487	878100	20.0	27.0	22-18A.W.G 0.5-1.0mm ²	red
BT012-488	878101	20.0	27.0	18-14A.W.G 0.75-2.5mm ²	blue
BT012-489	878101	20.0	27.0	18-14A.W.G 0.75-2.5mm ²	white
BT012-490	878100	20.5	34.5	12-10A.W.G 4-6mm ²	yellow

