
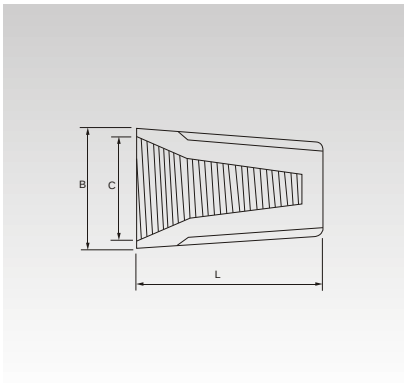


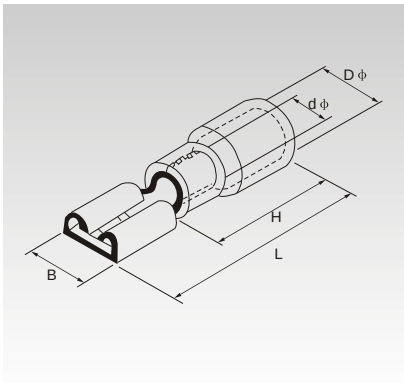

Conductor section:0.5-1.5mm ² (A.W.G22~ 16) I _{max} =10A Material:Brass									
BEISIT NO.	TYPE	Nema Tab mm	Thickness of material	DIMENSION					Color
				B	Dφ	dφ	L	H	
				mm	mm	mm	mm	mm	
BT012-491	FDD 1.25-110(5)	0.5 × 2.8	0.3	3.8	3.8	1.7	19.0	10.0	red
BT012-492	FDD 1.25-110(8)	0.8 × 2.8	0.3	3.8	3.8	1.7	19.0		
BT012-493	FDD 1.25-187(5)	0.5 × 4.75	0.35	5.6	3.8	1.7	19.0		
BT012-494	FDD 1.25-187(8)	0.8 × 4.75	0.35	5.6	3.8	1.7	19.0		
BT012-495	FDD 1.25-205	0.5 × 5.2	0.35	6.5	3.8	1.7	20.0		
BT012-496	FDD 1.25-250	0.8 × 6.35	0.4	7.4	3.8	1.7	21.0		

Conductor section:1.5-2.5mm ² (A.W.G16~ 14) I _{max} =15A Material: Brass									
BEISIT NO.	TYPE	Nema Tab mm	Thickness of material	DIMENSION					Color
				B	Dφ	dφ	L	H	
				mm	mm	mm	mm	mm	
BT012-497	FDD 2-110(5)	0.5 × 2.8	0.3	3.8	4.3	2.3	19.0	10.0	blue
BT012-498	FDD 2-110(8)	0.8 × 2.8	0.3	3.8	4.3	2.3	19.0		
BT012-499	FDD 2-187(5)	0.5 × 4.75	0.35	5.6	4.3	2.3	19.0		
BT012-500	FDD 2-187(8)	0.8 × 4.75	0.35	5.6	4.3	2.3	19.0		
BT012-501	FDD 2-205	0.5 × 5.2	0.35	6.5	4.3	2.3	20.0		
BT012-502	FDD 2-250	0.8 × 6.35	0.4	7.4	4.3	2.3	21.0		
BT012-503	FDD 2-312	0.8 × 8.0	0.4	9.0	4.3	2.3	23.0		

Conductor section:4-6mm ² (A.W.G12~ 10) I _{max} =24A Material: Brass									
BEISIT NO.	TYPE	Nema Tab mm	Thickness of material	DIMENSION					Color
				B	Dφ	dφ	L	H	
				mm	mm	mm	mm	mm	
BT012-504	FDD 5.5-25.0	0.8 × 6.35	0.4	7.4	5.7	3.4	25.0	13.0	yellow
BT012-505	FDD 5.5-375	1.2 × 9.4	0.5	10.9	5.7	3.4	29.6		

螺旋式壓綫帽
WIRE CONNECTOR

BEISIT NO.	TYPE	Lead combination range		DIMENSION			Color
				B	C	L	
				mm	mm	mm	
BT012-506	P71	Min0.75 × 1+0.5 × 1	Max1.5 × 2	8.5	3.5	14.7	gray
BT012-507	P72	Min0.75 × 3	Max1.5 × 3	10.1	6.5	17.5	blue
BT012-508	P73	Min0.75 × 3	Max1.5 × 3+1 × 1	11.2	8.0	21.4	orange
BT012-509	P74	Min0.25 × 1+0.75 × 1	Max2.5 × 4+0.75 × 1	13.7	7.5	23.6	yellow
BT012-510	P75	Min0.25 × 2	Max6 × 3+4 × 2	16.0	7.0	26.5	red
BT012-510-1	SP1	Min18 × 2	Max 12 × 3	19.0	12.5	22.0	yellow
BT012-510-2	SP2	Min14 × 2	Max 10 × 4	22.0	15	29.0	red



Conductor section:0.5-1.5mm ² (A.W.G22~ 16) I _{max} =10A Material: Brass									
BEISIT NO.	TYPE	Nema Tab mm	Thickness of material	DIMENSION					Color
				B	Dφ	dφ	L	H	
				mm	mm	mm	mm	mm	
BT012-511	MDD 1.25-110(5)	0.5 × 2.8	0.5	2.8	4.3	1.7	17.7	10.0	red
BT012-512	MDD 1.25-110(8)	0.8 × 2.8	0.8	2.8	4.3	1.7	17.7		
BT012-513	MDD 1.25-187(5)	0.5 × 4.75	0.5	4.75	4.3	1.7	20.0		
BT012-514	MDD 1.25-187(8)	0.8 × 4.75	0.8	4.75	4.3	1.7	20.0		
BT012-515	MDD 1.25-250	0.8 × 6.35	0.4 × 2	6.35	4.3	1.7	21.0		

Conductor section:1.5-2.5mm ² (A.W.G16~ 14)I _{max} =15A Material: Brass									
BEISIT NO.	TYPE	Nema Tab mm	Thickness of material	DIMENSION					Color
				B	Dφ	dφ	L	H	
				mm	mm	mm	mm	mm	
BT012-516	MDD 2-187(5)	0.5 × 4.75	0.5	4.75	4.3	2.3	20.0	10.0	blue
BT012-517	MDD 2-187(8)	0.8 × 4.75	0.8	4.75	4.3	2.3	20.0		
BT012-518	MDD 2-250	0.8 × 6.35	0.4 × 2	6.35	4.3	2.3	21.0		

Conductor section:4-6mm ² (A.W.G12~ 10)I _{max} =24A Material: Brass									
BEISIT NO.	TYPE	Nema Tab mm	Thickness of material	DIMENSION					Color
				B	Dφ	dφ	L	H	
				mm	mm	mm	mm	mm	
BT012-519	MDD 5.5-250	0.8 × 6.35	0.4 × 2	6.35	5.7	3.4	25.0	13.0	yellow

CLOSE-END WIRE CONNECTOR

Shell material: Nylon 66,94V-2,certificated agree by UL.
Usage:Peel the coat of wire, then insert to tube,use pincers to fix them.
Feature:Nylon shell,long copper tube,easy to conduct electricity and hold wire tightly.

BEISIT NO.	TYPE	Nema Tab mm	W(mm)		Suitable Wires			Packing
			B	C	D(mm)	mm ²	AWG	
			mm	mm				
BT012-520	φ 3	17.8	7.2	3.6	2.5	1.25	22-16	100PCS& 1000PCS
BT012-521	φ 4	21.0	8.2	4.0	2.9	2.0	16-14	
BT012-522	φ 5	22.5	9.0	4.8	3.9	5.5	12-10	
BT012-523	φ 6	25.0	10.0	5.6	4.5	8.0	8	
BT012-524	φ 7	24.2	11.0	6.5	5.4	10	8-6	100PCS& 500PCS
BT012-525	φ 8	25.6	11.8	7.5	6.0	13	6	
BT012-526	φ 10	29.5	13.5	9.3	7.5	16	4	100PCS

