
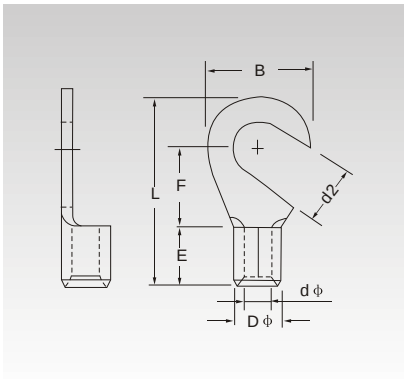


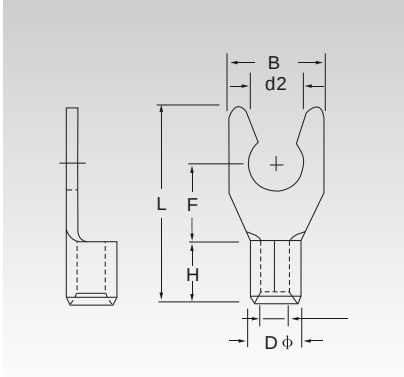

Imax=19A Material: Copper Thickness:0.75mm									
BEISIT NO.	TYPE	d2φ (mm)	DIMENSION						A.W.G mm ²
			B	F	L	E	Dφ	dφ	
			mm	mm	mm	mm	mm	mm	
BT012-644	LSNB 1.25-3.5	3.7	6.4	6.5	16.0	4.8	3.4	1.7	22-16A.W.G 0.5-1.5mm ²
BT012-645	LSNBS 1.25-4	4.3	7.2						
BT012-646	LSNBL 1.25-4	4.3	8.1						
BT012-647	LSNBS 1.25-5	5.3	8.1						
BT012-648	LSNBL 1.25-5	5.3	9.5						

Imax=27A Material: Copper Thickness:0.8mm									
BEISIT NO.	TYPE	d2φ (mm)	DIMENSION						A.W.G mm ²
			B	F	L	E	Dφ	dφ	
BT012-649	LSNB 2-3.5	3.7	6.0	6.5	16.0	4.8	4.1	2.3	16-14A.W.G 1.5-2.5mm ²
BT012-650	LSNBS 2-4	4.3	7.2						
BT012-651	LSNBL 2-4	4.3	8.1						
BT012-652	LSNBS 2-5	5.3	8.1						
BT012-653	LSNBL 2-5	5.3	9.5						

Imax=48A Material: Copper Thickness:1.0mm									
BEISIT NO.	TYPE	d2φ (mm)	DIMENSION						A.W.G mm ²
			B	F	L	E	Dφ	dφ	
			mm	mm	mm	mm	mm	mm	
BT012-654	LSNB 5.5-3.5	3.7	8.3	7.5	19.5	6.0	5.6	3.4	12-10A.W.G 4-6mm ²
BT012-655	LSNB 5.5-4	4.3	8.3						
BT012-656	LSNB 5.5-5	5.3	9.0						
BT012-657	LSNB 5.5-6	6.4	12.0						

鉤形裸端頭
HOOKED NAKED TERMINAL

Imax=19A Material: Copper Thickness:0.75mm									
BEISIT NO.	TYPE	d2φ (mm)	DIMENSION						A.W.G mm ²
			B	F	L	E	Dφ	dφ	
			mm	mm	mm	mm	mm	mm	
BT012-658	HNB 1.25-3.5	3.7	8.0	7.0	15.8	4.8	3.4	1.7	22-16A.W.G 0.5-1.5mm ²
BT012-659	HNB 1.25-4	4.3							
BT012-660	HNB 1.25-5	5.3							
BT012-661	HNB 1.25-6	6.4	11.6	11.0	21.8				

Imax=27A Material: Copper Thickness:0.8mm									
BEISIT NO.	TYPE	d2φ (mm)	DIMENSION						A.W.G mm ²
			B	F	L	E	Dφ	dφ	
			mm	mm	mm	mm	mm	mm	
BT012-662	HNB 2-3.5	3.7	8.5	7.8	16.8	4.8	4.1	2.3	16-14A.W.G 1.5-2.5mm ²
BT012-663	HNB 2-4	4.3							
BT012-664	HNB 2-5	5.3	9.5	7.3					
BT012-665	HNB 2-6	6.4	12.0	11.0					

Imax=48A Material: Copper Thickness:1.0mm									
BEISIT NO.	TYPE	d2φ (mm)	DIMENSION						A.W.G mm ²
			B	F	L	E	Dφ	dφ	
			mm	mm	mm	mm	mm	mm	
BT012-666	HNB 5.5-3.5	3.7	7.2	6.1	15.7	6.0	5.6	3.4	12-10A.W.G 4-6mm ²
BT012-667	HNB 5.5-4	4.3							
BT012-668	HNB 5.5-5	5.3	9.5	9.5	19.8				
BT012-669	HNB 5.5-6	6.4	12.0	10.3	22.5				
BT012-670	HNB 5.5-8	8.4	15.0	13.5	27.0				

Imax=62A Material:Copper Thickness:1.2mm									
BEISIT NO.	TYPE	d2φ (mm)	DIMENSION						A.W.G mm ²
			B	F	L	E	Dφ	dφ	
BT012-671	HNB 8-8	8.4	15.0	13.8	29.5	8.5	7.2	4.5	8A.W.G8mm ²



Conductor section:0.5-1.5mm²(A.W.G22 ~ 16)Imax=19A Material:Copper Thickness:0.75mm

BEISIT NO.	TYPE	American Bolt number	d2φ (mm)	DIMENSION					Color
				B	L	F	H	Dφ	
BT012-672	FSV 1.25-3.5	#6	3.7	7.5	19.0	5.1	10.0	4.3	red
BT012-673	FSV 1.25-4	#8	4.3	7.5	19.0	5.1			
BT012-674	FSV 1.25-5	#10	5.3	7.5	19.0	5.1			

Conductor section:1.5-2.5mm²(A.W.G16 ~ 14)Imax=27A Material:Copper Thickness:0.8mm

BEISIT NO.	TYPE	American Bolt number	d2φ (mm)	DIMENSION					Color
				B	L	F	H	Dφ	
BT012-675	FSV 2-3.5	#6	3.7	7.5	19.0	5.2	10.0	4.9	blue
BT012-676	FSV 2-4	#8	4.3	7.5	19.0	5.2			
BT012-677	FSV 2-5	#10	5.3	7.5	19.0	5.2			

Conductor section:4-6mm²(A.W.G12 ~ 10)Imax=48A Material:Copper Thickness:1.0mm

BEISIT NO.	TYPE	American Bolt number	d2φ (mm)	DIMENSION					Color
				B	L	F	H	Dφ	
BT012-678	FSV 5.5-3.5	#6	3.7	8.5	25.5	7.5	13.0	6.7	yellow
BT012-679	FSV 5.5-4	#8	4.3	8.5	25.5	7.5			
BT012-680	FSV 5.5-5	#10	5.3	8.5	25.5	7.5			

凹片形預絕緣端頭
FEMAL CHIP-SHAPED PRE-INSULATING TJOINT

Conductor section:0.5-1.5mm²(A.W.G22 ~ 16)Imax=19A Material:Copper Thickness:0.75mm

BEISIT NO.	TYPE	DIMENSION					Color
		B	L	F	H	Dφ	
BT012-681	LBV 1.25-3	3.0	26.8	16.8	10.0	4.3	red
BT012-682	LBV 1.25-4.6	4.6	26.8	16.8			

Conductor section:1.5-2.5mm²(A.W.G16 ~ 14)Imax=27A Material:Copper Thickness:0.8mm

BEISIT NO.	TYPE	DIMENSION					Color
		B	L	F	H	Dφ	
BT012-683	LBV 2-3	3.0	26.8	16.8	10.0	4.9	blue
BT012-684	LBV 2-4.6	4.6	26.8	16.8			

Conductor section:4-6mm²(A.W.G12 ~ 10)Imax=48A Material:Copper Thickness:1.0mm

BEISIT NO.	TYPE	DIMENSION					Color
		B	L	F	H	Dφ	
BT012-685	LBV 5.5-3	3.0	29.3	16.8	13.0	6.7	yellow
BT012-686	LBV 5.5-4.6	4.6	29.3	16.8			

