
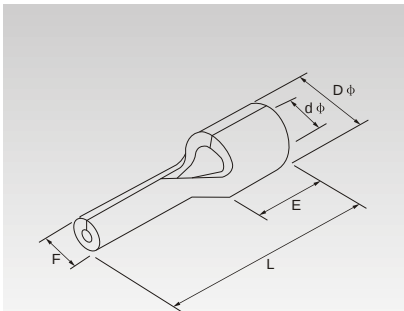


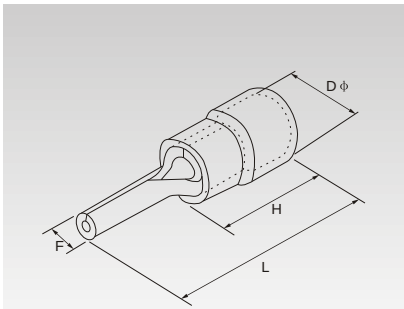

Conductor section:0.5-1.5mm²(A.W.G22~ 16)I_{max}=19A Material:Copper Thickness:0.75mm

BEISIT NO.	TYPE	DIMENSION				Color
		F	L	H	Dφ	
		mm	mm	mm	mm	
BT012-592	PTV 1.25-9	1.9	19.0	10.0	4.3	red
BT012-593	PTV 1.25-10	1.9	20.0			
BT012-594	PTV 1.25-12	1.9	22.0			
BT012-595	PTV 1.25-13	1.9	23.0			
BT012-596	PTV 1.25-18	1.9	28.0			

Conductor section:1.5-2.5mm²(A.W.G16~ 14)I_{max}=27A Material:Copper Thickness:0.8mm

BEISIT NO.	TYPE	DIMENSION				Color
		F	L	H	Dφ	
		mm	mm	mm	mm	
BT012-597	PTV 2-9	1.9	19.0	10.0	4.9	blue
BT012-598	PTV 2-10	1.9	20.0			
BT012-599	PTV 2-12	1.9	22.0			
BT012-600	PTV 2-13	1.9	23.0			
BT012-601	PTV 2-18	1.9	28.0			

Conductor section:2.5-4mm²(A.W.G14~ 12)I_{max}=36A Material:Copper Thickness:1.0mm

BEISIT NO.	TYPE	DIMENSION				Color
		F	L	H	Dφ	
		mm	mm	mm	mm	
BT012-602	PTV 3.5-10	2.8	20.0	13.0	6.2	black
BT012-603	PTV 3.5-12	2.8	25.5			

Conductor section:4-6mm²(A.W.G12~ 10)I_{max}=48A Material:Copper Thickness:1.0mm

BEISIT NO.	TYPE	DIMENSION				Color
		F	L	H	Dφ	
		mm	mm	mm	mm	
BT012-604	PTV 5.5-13	2.8	25.5	13.0	6.7	yellow

針形裸端頭（TZ型） PIN-SHAPED NATEDTERMINAL(TYPE TZ)

Conductor section:0.5-1.5mm²(A.W.G22~ 16)I_{max}=19A Material:Copper Thickness:0.75mm

BEISIT NO.	TYPE	DIMENSION				Color
		F	L	E	Dφ	
		mm	mm	mm	mm	
BT012-605	PTV 1.25-9	1.9	13.8	4.8	3.4	1.7
BT012-606	PTV 1.25-10	1.9	14.8			
BT012-607	PTV 1.25-12	1.9	16.8			
BT012-608	PTV 1.25-13	1.9	17.8			
BT012-609	PTV 1.25-18	1.9	22.8			

Conductor section:1.5-2.5mm²(A.W.G16~ 14)I_{max}=27A Material:Copper Thickness:0.8mm

BEISIT NO.	TYPE	DIMENSION				Color
		F	L	E	Dφ	
		mm	mm	mm	mm	
BT012-610	PTV 2-9	1.9	13.8	4.8	4.1	2.3
BT012-611	PTV 2-10	1.9	14.8			
BT012-612	PTV 2-12	1.9	16.8			
BT012-613	PTV 2-13	1.9	17.8			
BT012-614	PTV 2-18	1.9	22.8			

Conductor section:2.5-4mm²(A.W.G14~ 12)I_{max}=37A Material:Copper Thickness:1.0mm

BEISIT NO.	TYPE	DIMENSION				Color
		F	L	E	Dφ	
		mm	mm	mm	mm	
BT012-615	PTV 3.5-10	2.8	14.8	6.0	5.0	3.0
BT012-616	PTV 3.5-13	2.8	19.8			

Conductor section:4-6mm²(A.W.G12~ 10)I_{max}=48A Material:Copper Thickness:1.0mm

BEISIT NO.	TYPE	DIMENSION				Color
		F	L	H	Dφ	
		mm	mm	mm	mm	
BT012-617	PTV 5.5-13	2.8	19.8	6.0	5.6	3.4



Conductor section:0.5-1.5mm²(A.W.G22~ 16)I_{max}=19A Material:Copper Thickness:0.75mm

BEISIT NO.	TYPE	American Bolt number	d2φ (mm)	DIMENSION					Color
				B	L	F	H	Dφ	
				mm	mm	mm	mm	mm	
BT012-618	LSV 1.25-3.5	#6	3.7	6.4	21.2	6.5	10.0	4.3	red
BT012-619	LSVS 1.25-4	#8	4.3	7.2	21.2	6.5			
BT012-620	LSVL 1.25-4	#8	4.3	8.1	21.2	6.5			
BT012-621	LSVS 1.25-5	#10	5.3	8.1	21.2	6.5			
BT012-622	LSVL 1.25-5	#10	5.3	9.5	21.2	6.5			

Conductor section:1.5-2.5mm²(A.W.G16~ 14)I_{max}=27A Material:Copper Thickness:0.8mm

BEISIT NO.	TYPE	American Bolt number	d2φ (mm)	DIMENSION					Color
				B	L	F	H	Dφ	
				mm	mm	mm	mm	mm	
BT012-623	LSV 2-3.5	#6	3.7	6.0	21.2	6.5	10.0	4.9	blue
BT012-624	LSVS 2-4	#8	4.3	7.2	21.2	6.5			
BT012-625	LSVL 2-4	#8	4.3	8.1	21.2	6.5			
BT012-626	LSVS 2-5	#10	5.3	8.1	21.2	6.5			
BT012-627	LSVL 2-5	#10	5.3	9.5	21.2	6.5			

Conductor section:4-6mm²(A.W.G12~ 10)I_{max}=48A Material:Copper Thickness:1.0mm

BEISIT NO.	TYPE	American Bolt number	d2φ (mm)	DIMENSION					Color
				B	L	F	H	Dφ	
				mm	mm	mm	mm	mm	
BT012-628	LSV 5.5-3.5	#6	3.7	8.3	25.2	7.5	13.0	6.7	yellow
BT012-629	LSV 5.5-4	#8	4.3	8.3	25.2	7.5			
BT012-630	LSV 5.5-4	#10	5.3	9.0	23.9	7.5			
BT012-631	LSV 5.5-5	1/4	6.4	12.0	31.2	12.0			

鈎形預絕緣端頭 HOOKED PRE-INSULATING JOINT

Conductor section:0.5-1.5mm²(A.W.G22~ 16)I_{max}=19A Material:Copper Thickness:0.75mm

BEISIT NO.	TYPE	American Bolt number	d2φ (mm)	DIMENSION					Color
				B	L	F	H	Dφ	
				mm	mm	mm	mm	mm	
BT012-632	HV 1.25-3.5	#6	3.7	8.0	21.0	7.0	10.0	4.3	red
BT012-633	HV 1.25-4	#8	4.3	8.0	21.0	7.0			
BT012-634	HV 1.25-5	#10	5.3	8.0	21.0	7.0			
BT012-635	HV 1.25-6	1/4	6.4	11.6	27.0	11.1			

Conductor section:1.5-2.5mm²(A.W.G16~ 14)I_{max}=27A Material:Copper Thickness:0.8mm

BEISIT NO.	TYPE	American Bolt number	d2φ (mm)	DIMENSION					Color
				B	L	F	H	Dφ	
				mm	mm	mm	mm	mm	
BT012-636	HV 2-3.5	#6	3.7	8.5	22.0	7.75	10.0	4.9	blue
BT012-637	HV 2-4	#8	4.3	8.5	22.0	7.75			
BT012-638	HV 2-5	#10	5.3	9.5	22.0	7.25			
BT012-639	HV 2-5	1/4	6.4	12.0	27.0	11.0			

Conductor section:4-6mm²(A.W.G12~ 10)I_{max}=48A Material:Copper Thickness:1.0mm

BEISIT NO.	TYPE	American Bolt number	d2φ (mm)	DIMENSION					Color
				B	L	F	H	Dφ	
				mm	mm	mm	mm	mm	
BT012-640	HV 5.5-3.5	#6	3.7	7.2	21.4	5.9	13.0	6.7	yellow
BT012-641	HV 5.5-4	#8	4.3	9.5	25.5	8.25			
BT012-642	HV 5.5-5	#10	5.3	9.5	25.5	8.25			
BT012-643	HV 5.5-5	1/4	6.4	12.0	31.5	13.0			

