



Conductor section:0.5-1.5mm²(A.W.G22~ 16)Imax=19A Material:Copper Thickness:0.7mm

BEISIT NO.	TYPE	American Bolt number	d2φ (mm)	DIMENSION					color
				B	L	F	H	Dφ	
				mm	mm	mm	mm	mm	
BT012-205	RV 1.25-3	#4	3.2	5.7	17.6	4.95	10.0	4.3	red
BT012-206	RVS 1.25-3.5	#6	3.7	5.7	17.6	4.95			
BT012-207	RVM 1.25-3.5	#6	3.7	6.6	19.4	6.3			
BT012-208	RVL 1.25-3.5	#6	3.7	8.0	20.8	7.0			
BT012-209	RVS 1.25-4	#8	4.3	6.6	19.4	6.3			
BT012-210	RVL 1.25-4	#8	4.3	8.0	20.8	7.0			
BT012-211	RVS 1.25-5	#10	5.3	8.0	20.8	7.0			
BT012-212	RVL 1.25-5	#10	5.3	9.8	23	8.5			
BT012-213	RVS 1.25-6	1/4	6.4	9.8	23	8.5			
BT012-214	RVL 1.25-6	1/4	6.4	11.6	26.8	11.1			
BT012-215	RV 1.25-8	5/16	8.4	11.6	26.8	11.1			
BT012-216	RV 1.25-10	3/8	10.5	13.6	30.5	13.9			
BT012-217	RV 1.25-12	1/2	13.0	19.2	36	16.5			

Conductor section:0.5-2.5mm²(A.W.G16~ 14)Imax=27A Material:Copper Thickness:0.8mm


BEISIT NO.	TYPE	American Bolt number	d2φ (mm)	DIMENSION					color
				B	L	F	H	Dφ	
				mm	mm	mm	mm	mm	
BT012-218	RV 2-3	#4	3.2	6.6	17.5	4.3	10.0	4.9	blue
BT012-219	RVS 2-3.5	#6	3.7	6.6	17.5	4.3			
BT012-220	RVM 2-3.5	#8	3.7	6.6	21.2	7.0			
BT012-221	RVL 2-3.5	#6	3.7	8.5	22	7.75			
BT012-222	RVS 2-4	#8	4.3	6.6	21.2	7.0			
BT012-223	RVL 2-4	#8	4.3	8.5	22	7.75			
BT012-224	RVS 2-5	#10	5.3	8.5	22	7.75			
BT012-225	RVL 2-5	#10	5.3	9.5	22	7.25			
BT012-226	RVS 2-6	1/4	6.4	12.0	27	11.0			
BT012-227	RV 2-8	5/16	8.4	12.0	27	11.0			
BT012-228	RV 2-10	3/8	10.5	13.6	30.7	13.9			
BT012-229	RV 2-12	1/2	13.0	19.2	36.2	16.5			

Conductor section:2.5-4mm²(A.W.G14~ 12)Imax=37A Material:Copper Thickness:1.0mm

BEISIT NO.	TYPE	American Bolt number	d2φ (mm)	DIMENSION					color
				B	L	F	H	Dφ	
				mm	mm	mm	mm	mm	
BT012-230	RV 3.5-4	#8	4.3	8.0	24.5	7.7	13.0	6.2	black
BT012-231	RVS 3.5-5	#10	5.3	8.0	24.5	7.7			
BT012-232	RVL 3.5-5	#10	5.3	12.0	27.9	7.7			
BT012-233	RV 3.5-6	1/4	6.4	12.0	27.9	7.7			

Conductor section:4-6mm²(A.W.G12~ 10)Imax=48A Material: Copper Thickness:1.0mm

BEISIT NO.	TYPE	American Bolt number	d2φ (mm)	DIMENSION					color
				B	L	F	H	Dφ	
				mm	mm	mm	mm	mm	
BT012-234	RV 5.5-3.5	#6	3.7	7.2	21.7	5.3	13.0	6.7	yellow
BT012-235	RVS 5.5-4	#8	4.3	7.2	21.7	5.3			
BT012-236	RVL 5.5-4	#8	4.3	9.5	25.8	8.25			
BT012-237	RV 5.5-5	#10	5.3	9.5	25.8	8.25			
BT012-238	RVS 5.5-6	1/4	6.4	12.0	29.35	10.7			
BT012-239	RVL 5.5-6	1/4	6.4	12.0	31.8	13			
BT012-240	RV 5.5-8	5/16	8.4	15.0	34	13.7			
BT012-241	RV 5.5-10	3/8	10.5	15.0	34	13.7			
BT012-242	RV 5.5-12	1/2	13.0	19.2	38.4	16			

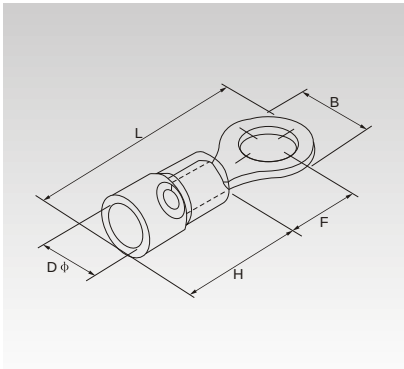

Conductor section:0.5-1.5mm²(A.W.G22~ 16)Imax=19A Material: Copper Thickness:0.7mm

BEISIT NO.	TYPE	American Bolt number	d2φ (mm)	DIMENSION					
				B	L	F	E	Dφ	dφ
				mm	mm	mm	mm	mm	mm
BT012-243	RNB 1.25-3	#4	3.2	5.7	12.6	4.95	4.8	3.4	1.7
BT012-244	RNBS 1.25-3.5	#6	3.7	5.7	12.6	4.95			
BT012-245	RNBM 1.25-3.5	#6	3.7	6.6	14.4	6.3			
BT012-246	RNBL 1.25-3.5	#6	3.7	8.0	15.8	7.0			
BT012-247	RNBS 1.25-4	#8	4.3	6.6	14.4	6.3			
BT012-248	RNBL 1.25-4	#8	4.3	8.0	15.8	7.0			
BT012-249	RNBS 1.25-5	#10	5.3	8.0	15.8	7.0			
BT012-250	RNBL 1.25-5	#10	5.3	9.8	18.0	8.3			
BT012-251	RNBS 1.25-6	1/4	6.4	9.8	18.8	8.3			
BT012-252	RNBL 1.25-6	1/4	6.4	11.6	21.8	11.2			
BT012-253	RNB 1.25-8	5/16	8.4	11.6	21.8	11.2			
BT012-254	RNB 1.25-10	3/8	10.5	13.6	25.5	13.9			
BT012-255	RNB 1.25-12	1/2	13.0	19.2	31.0	16.5			



Conductor section:1.5-2.5mm²(A.W.G16~ 14)Imax=27A Material: Copper Thickness:0.8mm

BEISIT NO.	TYPE	American Bolt number	d2φ (mm)	DIMENSION					
				B	L	F	E	Dφ	dφ
				mm	mm	mm	mm	mm	mm
BT012-256	RNB 2-3	#4	3.2	6.6	12.3	4.2	4.8	4.1	2.3
BT012-257	RNBS 2-3.5	#6	3.7	6.6	12.3	4.2			
BT012-258	RNBM 2-3.5	#6	3.7	6.6	16.0	7.9			
BT012-259	RNBL 2-3.5	#6	3.7	8.5	16.8	7.75			
BT012-260	RNBS 2-4	#8	4.3	6.6	16.0	7.9			
BT012-261	RNBL 2-4	#8	4.3	8.5	16.8	7.75			
BT012-262	RNBS 2-5	#10	5.3	8.5	16.8	7.75			
BT012-263	RNBL 2-5	#10	5.3	9.5	16.8	7.25			
BT012-264	RNB 2-6	1/4	6.4	12.0	21.8	11.0			
BT012-265	RNB 2-8	5/16	6.4	12.0	21.8	11.0			
BT012-266	RNB 2-10	3/8	10.5	13.6	25.5	13.9			
BT012-267	RNB 2-12	1/2	13.0	19.2	31.0	16.5			



Conductor section:2.5-4mm²(A.W.G14~ 12)Imax=37A Material: Copper Thickness:1.0mm

BEISIT NO.	TYPE	American Bolt number	d2φ (mm)	DIMENSION					
				B	L	F	E	Dφ	dφ
				mm	mm	mm	mm	mm	mm
BT012-268	RNB 3.5-4	#8	4.3	8.0	18.0	7.7	6.0	5.0	3.0
BT012-269	RNBS 3.5-5	#10	5.3	8.0	18.0	7.7			
BT012-270	RNBL 3.5-5	#10	5.3	12.0	21.4	7.7			
BT012-271	RNB 3.5-6	1/4	6.4	12.0	21.4	7.7			

Conductor section:4-6mm²(A.W.G12~ 10)Imax=48A Material: Copper Thickness:1.0mm

BEISIT NO.	TYPE	American Bolt number	d2φ (mm)	DIMENSION					
				B	L	F	E	Dφ	dφ
				mm	mm	mm	mm	mm	mm
BT012-272	RNB 5.5-3.5	#6	3.7	7.2	15.7	5.3	6.8	5.6	3.4
BT012-273	RNBS 5.5-4	#8	4.3	7.2	15.7	5.3			
BT012-274	RNBL 5.5-4	#8	4.3	9.5	19.8	8.25			
BT012-275	RNB 5.5-5	#10	5.3	9.5	19.8	8.25			
BT012-276	RNBS 5.5-6	1/4	6.4	12.0	23.35	10.7			
BT012-277	RNBL 5.5-6	1/4	6.4	12.0	25.8	13.0			
BT012-278	RNB 5.5-8	5/16	8.4	15.0	28.0	13.7			
BT012-279	RNB 5.5-10	3/8	10.5	15.0	28.0	13.7			
BT012-280	RNB 5.5-12	1/2	13.0	19.2	32.4	16.0			

