
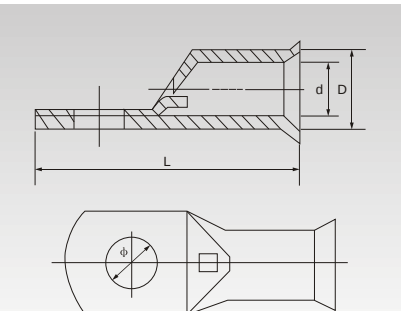


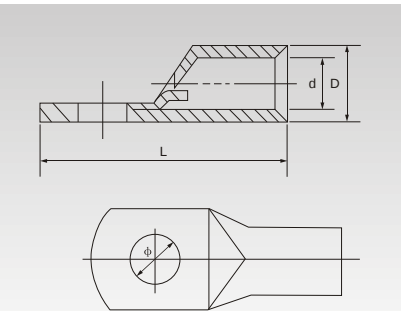

用途 APPLICATION

适用于標稱截面 1.5-1000mm²電力電纜式電綫的銅導體與電氣高設備的連接，特點，
采用管料含銅量>99.9%的高純T2銅管制造，長期工作溫度-55℃-150℃，表面鍍錫。

These products are suitable for the connection of copper conductors(section 1.5-100mm²) in power cable with electronic equipment they are made of with higher 99.9 percent pure copper tube T2 and coated with tin. Working temperature -55℃-150℃.

BEISIT NO.	TYPE	φ	D	d	L
BT012-870	SC(JGY)-1.5	φ 4.2, φ 5.2	3.5	1.8	18
BT012-871	SC(JGY)-2.5	φ 4.2, φ 5.2, φ 6.2	4	2.5	19
BT012-872	SC(JGY)-4	φ 5.2, φ 6.2	4.8	3.1	21
BT012-873	SC(JGY)-6	φ 5.2, φ 6.2, φ 8.2	5.5	3.8	24
BT012-874	SC(JGY)-10	φ 6.2, φ 8.2	6.8	4.8	25.5
BT012-875	SC(JGY)-16	φ 6.2, φ 8.2, φ 10.5	7.5	5.5	30.5
BT012-876	SC(JGY)-25	φ 6.2, φ 8.2, φ 10.5	9	7	34
BT012-877	SC(JGY)-35	φ 6.2, φ 8.2, φ 10.5, φ 12.5	10.5	8.2	38
BT012-878	SC(JGY)-50	φ 8.2, φ 10.5, φ 12.5	12.5	9.8	45
BT012-879	SC(JGY)-70	φ 8.2, φ 10.5, φ 12.5	14.5	11.5	50
BT012-880	SC(JGY)-95	φ 10.5, φ 12.5	17.5	13.8	55.5
BT012-881	SC(JGY)-120	φ 12.5, φ 16.5	19.5	15.5	63
BT012-882	SC(JGY)-150	φ 12.5, φ 16.5	21	16.5	71
BT012-883	SC(JGY)-185	φ 16.5	23.5	18.8	78
BT012-884	SC(JGY)-240	φ 16.5	26.5	21	92
BT012-885	SC(JGY)-300	φ 16.5, φ 20.5	30	24	102
BT012-886	SC(JGY)-400	φ 16.5, φ 20.5	34	26.5	113
BT012-887	SC(JGY)-500	φ 16.5, φ 20.5	38	30	123
BT012-888	SC(JGY)-630	φ 20.5	45	35	135
BT012-889	SC(JGY)-800	φ 22.5	50	39	170
BT012-890	SC(JGY)-1000	φ 22.5	56	44	200

BEISIT NO.	TYPE	φ	D	d	L
BT012-891	SC(JGB)-1.5	φ 4.2, φ 5.2	3.5	1.8	18
BT012-892	SC(JGB)-2.5	φ 4.2, φ 5.2, φ 6.2	4	2.5	19
BT012-893	SC(JGB)-4	φ 5.2, φ 6.2	4.8	3.1	21
BT012-894	SC(JGB)-6	φ 5.2, φ 6.2, φ 8.2	5.5	3.8	24
BT012-895	SC(JGB)-10	φ 6.2, φ 8.2	6.8	4.8	25.5
BT012-896	SC(JGB)-16	φ 6.2, φ 8.2, φ 10.5	7.5	5.5	30.5
BT012-897	SC(JGB)-25	φ 6.2, φ 8.2, φ 10.5	9	7	34
BT012-898	SC(JGB)-35	φ 6.2, φ 8.2, φ 10.5, φ 12.5	10.5	8.2	38
BT012-899	SC(JGB)-50	φ 8.2, φ 10.5, φ 12.5	12.5	9.8	45
BT012-900	SC(JGB)-70	φ 8.2, φ 10.5, φ 12.5	14.5	11.5	50
BT012-901	SC(JGB)-95	φ 10.5, φ 12.5	17.5	13.8	55.5
BT012-902	SC(JGB)-120	φ 12.5, φ 16.5	19.5	15.5	63
BT012-903	SC(JGB)-150	φ 12.5, φ 16.5	21	16.5	71
BT012-904	SC(JGB)-185	φ 16.5	23.5	18.8	78
BT012-905	SC(JGB)-240	φ 16.5	26.5	21	92
BT012-906	SC(JGB)-300	φ 16.5, φ 20.5	30	24	102
BT012-907	SC(JGB)-400	φ 16.5, φ 20.5	34	26.5	113
BT012-908	SC(JGB)-500	φ 16.5, φ 20.5	38	30	123
BT012-909	SC(JGB)-630	φ 20.5	45	35	135
BT012-910	SC(JGB)-800	φ 22.5	50	39	170
BT012-911	SC(JGB)-1000	φ 22.5	56	44	200



用途 APPLICATION

适用于配電裝置中導綫連接。
Suitable for the connerction of copper conductors in distribution equipment.

連接管适用于配電裝置中各種圓型，半圓扇型電綫，電力電纜之間的連接。GTL系列
堵油型連接管。采用摩擦焊工藝制造，質量可靠。

These products are applicable connect the circular wire and hemicycle-ser tor wire in distribution equipment or power supply cables. GTL series connecting tube is made of friotionwelding cr aft , both top quality.

BEISIT NO.	TYPE	D	d	D1	L1	L2	L
BT012-912	OT-10A	5.2	6	14.5	4.5	2	0.8
BT012-913	OT-20A	6.2	7	17	5.5	2.5	1
BT012-914	OT-30A	6.2	8.2	19	5.8	3.2	1.2
BT012-915	OT-40A	6.2	9	19.5	6.2	3.5	1.2
BT012-916	OT-50A	6.2	9	21.5	6.5	3.5	1.2
BT012-917	OT-60A	8.2	10	23	7	4	1.4
BT012-918	OT-80A	8.2	11	25	8	4.5	1.5
BT012-919	OT-100A	8.2	12	29	8.5	5	1.5
BT012-920	OT-150A	10.2	12	31	9	5.5	1.6
BT012-921	OT-200A	10.2	14	33	10	6	1.7
BT012-922	OT-250A	10.2	15.5	36	10.5	6.5	2
BT012-923	OT-300A	12.2	16	40	11.5	7	2
BT012-924	OT-400A	12.2	18	43	13	8	2.2
BT012-925	OT-500A	14.2	20	46	14.5	8.5	2.4
BT012-926	OT-600A	16.2	22	50.5	16	10.5	2.8
BT012-927	OT-800A	18.2	26	61	17.5	12.5	3.2
BT012-928	OT-1000A	18.2	33	66	20.5	15.5	3.8

BEISIT NO.	TYPE	D	d	D1	L1	L2	L
BT012-929	GTL-16	10	6	9	30	30	70
BT012-930	GTL-25	12	7	10	33	30	75
BT012-931	GTL-35	14	8.5	11	40	30	85
BT012-932	GTL-50	16	9.8	13	42	32	95
BT012-933	GTL-70	18	11.5	15	50	38	105
BT012-934	GTL-95	21	13.5	17	50	40	110
BT012-935	GTL-120	23	15	19	55	42	112
BT012-936	GTL-150	25	17	21	55	44	118
BT012-937	GTL-185	27	18.5	23	60	46	125
BT012-938	GTL-240	30	21	26	60	54	130
BT012-939	GTL-300	34	23	28	65	56	145
BT012-940	GTL-400	38	27	30	70	60	155
BT012-941	GTL-500	43	29	34	75	65	165

