



Conductor section:0.5-1.5mm²(A.W.G22~ 16) I_{max}=19A Material: Copper Thickness:0.7mm


BEISIT NO.	TYPE	American Bolt number	D2(mm)	DIMENSION					color
				B	L	F	H	Dφ	
				mm	mm	mm	mm	mm	
BT012-001	ESV 1.25-3	# 4	3.2	5.7	21.2	6.5	10.0	4.3	red
BT012-002	ESVS 1.25-3.5	# 6	3.7	5.7	21.2	6.5			
BT012-003	ESVL 1.25-3.5	# 6	3.7	6.4	21.2	6.5			
BT012-004	ESVS 1.25-4	# 8	4.3	6.4	21.2	6.5			
BT012-005	ESVM 1.25-4	# 8	4.3	7.2	21.2	6.5			
BT012-006	ESVL 1.25-4	# 8	4.3	8.1	21.2	6.5			
BT012-007	ESVS 1.25-5	# 10	5.3	8.1	21.2	6.5			
BT012-008	ESVL 1.25-5	# 10	5.3	9.5	21.2	6.5			
BT012-009	ESVS 1.25-6	1/4	6.4	9.5	21.2	6.5			
BT012-010	ESVL 1.25-6	1/4	6.4	12.0	27.2	11.0			

Conductor section:0.5-1.5mm²(A.W.G16~ 14) I_{max}=27A Material: Copper Thickness:0.8mm

BEISIT NO.	TYPE	American Bolt number	D2(mm)	DIMENSION					color
				B	L	F	H	Dφ	
				mm	mm	mm	mm	mm	
BT012-011	ESV 2-3.2	# 4	3.2	5.7	21.2	6.5	10.0	4.9	blue
BT012-012	ESVS 2-3.7	# 6	3.7	5.7	21.2	6.5			
BT012-013	ESVL 2-3.7	# 6	3.7	6.0	21.2	6.5			
BT012-014	ESVS 2-4	# 8	4.3	6.4	21.2	6.5			
BT012-015	ESVM 2-4	# 8	4.3	7.2	21.2	6.5			
BT012-016	ESVL 2-4	# 8	4.3	8.1	21.2	6.5			
BT012-017	ESVS 2-5	# 10	5.3	8.1	21.2	6.5			
BT012-018	ESVL 2-5	# 10	5.3	9.5	21.2	6.5			
BT012-019	ESVS 2-6	1/4	6.5	9.5	21.2	6.5			
BT012-020	ESVL 2-6	1/4	6.5	12.0	27.2	11.0			

Conductor section:4-6mm²(A.W.G12~ 10) I_{max}=48A Material: Copper Thickness:1.0mm

BEISIT NO.	TYPE	American Bolt number	D2(mm)	DIMENSION					color
				B	L	F	H	Dφ	
				mm	mm	mm	mm	mm	
BT012-021	ESV 5.5-3.5	# 6	3.7	8.3	26	7.5	13.0	6.7	yellow
BT012-022	ESVS 5.5-4	# 8	4.3	8.3	26	7.5			
BT012-023	ESVL 5.5-4	# 8	4.3	9.0	26	7.5			
BT012-024	ESV 5.5-5	# 10	5.3	9.0	26	7.5			
BT012-025	ESVS 5.5-6	1/4	6.5	9.0	26	7.5			
BT012-026	ESVL 5.5-6	1/4	6.5	12.0	32	12.0			
BT012-027	ESV 5.5-8	5/16	8.4	14.0	37	11.5			

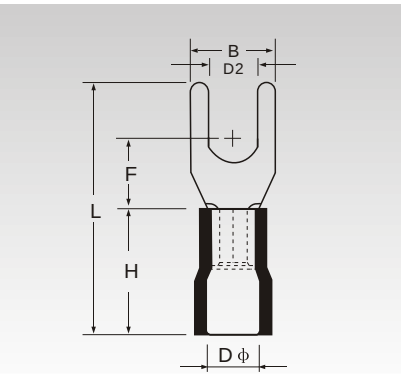

Conductor section:0.5-1.5mm²(A.W.G22~ 16) I_{max}=19A Material: Copper Thickness:0.7mm

BEISIT NO.	TYPE	American Bolt number	D2(mm)	DIMENSION					color
				B	L	F	H	Dφ	
				mm	mm	mm	mm	mm	
BT012-028	ERV 1.25-3	# 4	3.2	5.7	17.6	4.95	10.0	4.3	red
BT012-029	ERVS 1.25-3.5	# 6	3.7	5.7	17.6	4.95			
BT012-030	ERVM 1.25-3.5	# 6	3.7	6.6	19.4	6.3			
BT012-031	ERVL 1.25-3.5	# 6	3.7	8.0	20.8	7.0			
BT012-032	ERVS 1.25-4	# 8	4.3	6.6	19.4	6.3			
BT012-033	ERVL 1.25-4	# 8	4.3	8.0	20.8	7.0			
BT012-034	ERVS 1.25-5	# 10	5.3	8.0	20.8	7.0			
BT012-035	ERVL 1.25-5	# 10	5.3	9.8	23	8.5			
BT012-036	ERVS 1.25-6	1 /4	6.4	9.8	23	8.5			
BT012-037	ERVL 1.25-6	1 /4	6.4	11.6	26.8	11.1			
BT012-038	ERV 1.25-8	5/16	8.4	11.6	26.8	11.1			
BT012-039	ERV 1.25-10	3/8	10.5	13.6	30.5	13.9			
BT012-040	ERV 1.25-12	1 /2	13.0	19.2	36	16.5			

Conductor section:0.5-1.5mm²(A.W.G16~ 14) I_{max}=27A Material: Copper Thickness:0.8mm


BEISIT NO.	TYPE	American Bolt number	D2(mm)	DIMENSION					color
				B	L	F	H	Dφ	
				mm	mm	mm	mm	mm	
BT012-041	ERV 2-3	#4	3.2	6.6	17.5	4.3	10.0	4.9	blue
BT012-042	ERVS 2-3.5	#6	3.7	6.6	17.5	4.3			
BT012-043	ERVM 2-3.5	#8	3.7	6.6	21.2	7.0			
BT012-044	ERVL 2-3.5	#6	3.7	8.5	22	7.75			
BT012-045	ERVS 2-4	#8	4.3	6.6	21.2	7.0			
BT012-046	ERVL 2-4	#8	4.3	8.5	22	7.75			
BT012-047	ERVS 2-5	#10	5.3	8.5	22	7.75			
BT012-048	ERVL 2-5	#10	5.3	9.5	22	7.25			
BT012-049	ERVS 2-6	1 /4	6.4	12.0	27	11.0			
BT012-050	ERV 2-8	5/16	8.4	12.0	27	11.0			
BT012-051	ERV 2-10	3/8	10.5	13.6	30.7	13.9			
BT012-052	ERV 2-12	1 /2	13.0	19.2	36.2	16.5			



Conductor section:2.5-4mm²(A.W.G14~ 12) I_{max}=37A Material: Copper Thickness:1.0mm

BEISIT NO.	TYPE	American Bolt number	D2(mm)	DIMENSION					color
				B	L	F	H	Dφ	
				mm	mm	mm	mm	mm	
BT012-053	ERV 3.5-4	#8	4.3	8.0	24.5	7.7	13.0	6.2	black
BT012-054	ERVS 3.5-5	#10	5.3	8.0	24.5	7.7			
BT012-055	ERVL 3.5-5	#10	5.3	12.0	27.9	7.7			
BT012-056	ERV 3.5-6	1 /4	6.4	12.0	27.9	7.7			

Conductor section:4-6mm²(A.W.G12~ 10) I_{max}=48A Material: Copper Thickness:1.0mm

BEISIT NO.	TYPE	American Bolt number	D2(mm)	DIMENSION					color
				B	L	F	H	Dφ	
				mm	mm	mm	mm	mm	
BT012-057	ERV 5.5-3.5	#6	3.7	7.2	21.7	5.3	13.0	6.7	yellow
BT012-058	ERVS 5.5-4	#8	4.3	7.2	21.7	5.3			
BT012-059	ERVL 5.5-4	#8	4.3	9.5	25.8	8.25			
BT012-060	ERV 5.5-5	#10	5.3	9.5	25.8	8.25			
BT012-061	ERVS 5.5-6	1 /4	6.4	12.0	29.35	10.7			
BT012-062	ERVL 5.5-6	1 /4	6.4	12.0	31.8	13			
BT012-063	ERV 5.5-8	5/16	8.4	15.0	34	13.7			
BT012-064	ERV 5.5-10	3/8	10.5	15.0	34	13.7			
BT012-065	ERV 5.5-12	1 /2	13.0	19.2	38.4	16			

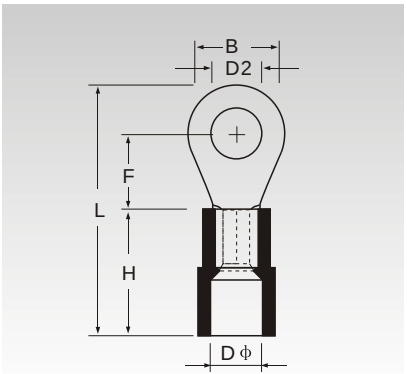

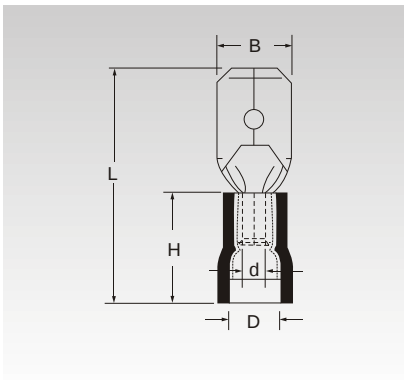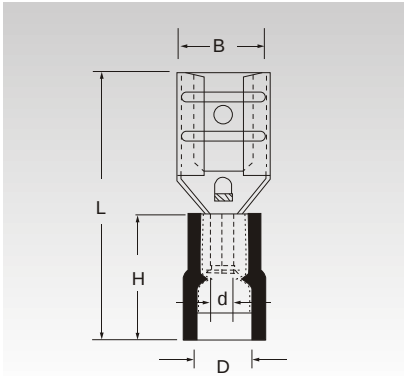

Conductor section:0.5-1.5mm ² (A.W.G22~ 16) I _{max} =10A Material: Brass									
BEISIT NO.	TYPE	Nema Tab (mm)	Thickness of material (mm)	DIMENSION					color
				B	D φ	d φ	L	H	
				mm	mm	mm	mm	mm	
BT012-066	EFDD 1.25-250	0.8 × 6.35	0.4	7.4	3.8	1.7	21.0	10.0	red

Conductor section:1.5-2.5mm ² (A.W.G16~ 14) I _{max} =15A Material: Brass									
BEISIT NO.	TYPE	Nema Tab (mm)	Thickness of material (mm)	DIMENSION					color
				B	D φ	d φ	L	H	
				mm	mm	mm	mm	mm	
BT012-067	EFDD 2-250	0.8 × 6.35	0.4	7.4	4.3	2.3	21.0	10.0	blue

Conductor section:4-6mm ² (A.W.G12~ 10) I _{max} =24A Material: Brass									
BEISIT NO.	TYPE	Nema Tab (mm)	Thickness of material (mm)	DIMENSION					color
				B	D φ	d φ	L	H	
				mm	mm	mm	mm	mm	
BT012-068	EFDD 5.5-250	0.8 × 6.35	0.4	7.4	5.7	3.4	25.0	13.0	yellow

公預絕緣端頭（雙壓易進式）
MALE PRE-INSULATING JOINT(INSIDE COLLAR)
EASY ENTRY COPPER SLEEVE

Conductor section:0.5-1.5mm ² (A.W.G22~ 16) I _{max} =10A Material: Brass									
BEISIT NO.	TYPE	Nema Tab (mm)	Thickness of material (mm)	DIMENSION					color
				B	D φ	d φ	L	H	
				mm	mm	mm	mm	mm	
BT012-069	EMDD 1.25-250	0.8 × 6.35	0.4 × 0.2	6.35	4.3	1.7	21.0	10.0	red

Conductor section:1.5-2.5mm ² (A.W.G16~ 14) I _{max} =15A Material: Brass									
BEISIT NO.	TYPE	Nema Tab (mm)	Thickness of material (mm)	DIMENSION					color
				B	D φ	d φ	L	H	
				mm	mm	mm	mm	mm	
BT012-070	EMDD 2-250	0.8 × 6.35	0.4 × 0.2	6.35	4.3	2.3	21.0	10.0	blue

Conductor section:4-6mm ² (A.W.G12~ 10) I _{max} =24A Material: Brass									
BEISIT NO.	TYPE	Nema Tab (mm)	Thickness of material (mm)	DIMENSION					color
				B	D φ	d φ	L	H	
				mm	mm	mm	mm	mm	
BT012-071	EMDD 5.5-250	0.8 × 6.35	0.4 × 0.2	6.35	5.7	3.4	25.0	13.0	yellow



Conductor section:0.5-1.5mm ² (A.W.G22~ 16) I _{max} =10A Material: Brass								
BEISIT NO.	TYPE	Nema Tab (mm)	DIMENSION					
			B	B1	H	D φ	d φ	L
			mm	mm	mm	mm	mm	mm
BT012-072	EFBDD 1.25-250	0.8 × 6.35	7.4	6.35	10.0	3.8	1.7	21.5

Conductor section:1.5-2.5mm ² (A.W.G16 ~ 14) I _{max} =15A Material: Brass								
BEISIT NO.	TYPE	Nema Tab (mm)	DIMENSION					
			B	B1	H	D φ	d φ	L
			mm	mm	mm	mm	mm	mm
BT012-073	EFBDD 2-250	0.8 × 6.35	7.4	6.35	10.0	4.3	2.3	21.5

Conductor section:4-6mm²(A.W.G12~ 10) I _{max} =24A Material: Brass								
BEISIT NO.	TYPE	Nema Tab (mm)	DIMENSION					
			B	B1	H	D ϕ	d ϕ	L
			mm	mm	mm	mm	mm	mm
BT012-074	EFBDD 5.5-250	0.8 × 6.35	7.4	6.35	13.0	5.7	3.4	25.0

子彈形公預絕緣接頭（雙壓易進式）
BULLET SHAPED MALE PRE-INSULATING JOINT(INSIDE COLLAR)
EASY ENTRY COPPER SLEEVE

Conductor section:0.5-1.5mm ² (A.W.G22 ~ 16) I _{max} =10A Material: Brass								
BEISIT NO.	TYPE	Thickness of material (mm)	DIMENSION					color
			b φ	F	D φ	H	L	
			mm	mm	mm	mm	mm	
BT012-075	EMPD 1.25-156	0.4	4.0	11.0	1.7	10.0	21.0	red

Conductor section:1.5-2.5mm ² (A.W.G16~ 14) I _{max} =15A Material: Brass								
BEISIT NO.	TYPE	Thickness of material (mm)	DIMENSION					color
			b φ	F	D φ	H	L	
			mm	mm	mm	mm	mm	
BT012-076	EMPD 2-156	0.4	4.0	11.0	2.3	10.0	21.0	blue
BT012-077	EMPD 2-196	0.4	5.0	11.0	2.3	10.0		

Conductor section:4-6mm ² (A.W.G12~ 10) I _{max} =24A Material: Brass								
BEISIT NO.	TYPE	Thickness of material (mm)	DIMENSION					color
			b φ	F	D φ	H	L	
			mm	mm	mm	mm	mm	
BT012-078	EMPD 5-195	0.4	5.0	12.0	3.4	13.0	25.0	yellow

