


Size 3A Surface mounted hous, Lateral opening hole

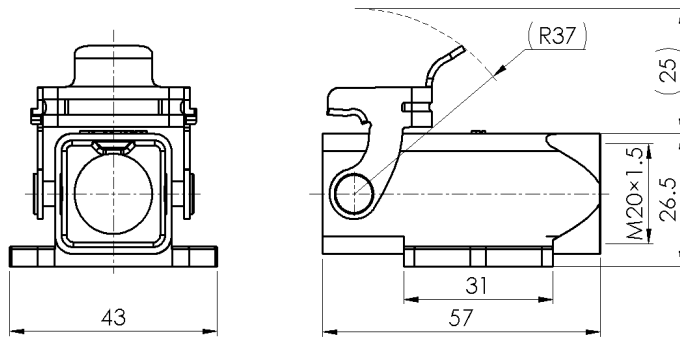

Typecode H3A-SMS-1LS-M20
ID 1 007 01 0000018

Technical Data

Product Properties

Series	Size 3A
Mating with	HA-003,HA-004,HD-007,HD-008,HQ-005
	HQ-007, HQ-012
Housing type	Surface mounted hous, lateral opening hole
Cable outlets direction	Lateral opening hole
Cable outlets	M20 x 1.5
Locking type	Single locking lever
Installation mode	Panel mount
Protection Class	IP65
Impact strength	IK08
Temperature range	-40 °C ... 125 °C
Standard	DIN EN 175301-801

Insert

Housing material	Die-cast aluminum
Color	Gray (RAL 7037)
Latch	Stainless steel


Commercial data

Weight	0.080 kg
Packaging unit	1 pc
Country of origin	CN

Features

- Die casting of zinc
- Surface fixed installation
- Lateral opening hole
- Stainless steel latch
- Resistant to salt spray
- Approval: UL94-V0
- RoHS-compliant

Mounting-hole Size

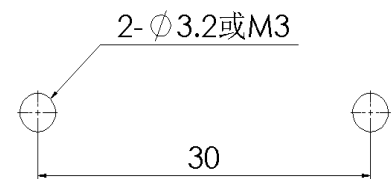

*这里所列的是设计数据，有关产品的变更不在此做说明，未尽事宜请联系客服。用户有责任验证功能、符合适用的法律和指令以及在特定应用中的电气安全。