


## Size 3A Sleeve housing, Top opening hole

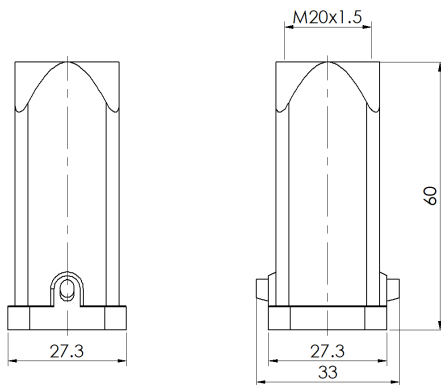

**Typecode**     H3A-TO-2P-M20  
**ID**                1 007 01 0000010

### Technical Data

#### Product Properties

|                         |                                                          |
|-------------------------|----------------------------------------------------------|
| Series                  | Size 3A                                                  |
| Mating with             | HA-003, HA-004, HD-007, HD-008, HQ-005<br>HQ-007, HQ-012 |
| Housing type            | Sleeve housing                                           |
| Cable outlets direction | Top opening hole                                         |
| Cable outlets           | M20 x 1.5                                                |
| Protection Class        | IP65/IP67                                                |
| Impact strength         | IK08                                                     |
| Temperature range       | -40 °C ... 125 °C                                        |
| Standard                | DIN EN 175301-801                                        |

#### Insert

|                  |                 |
|------------------|-----------------|
| Housing material | Die-cast zinc   |
| Color            | Gray (RAL 7037) |

#### Commercial data

|                   |          |
|-------------------|----------|
| Weight            | 0.065 kg |
| Packaging unit    | 1 pc     |
| Country of origin | CN       |

### Features

- Die casting of zinc
- Top opening hole
- Resistant to salt spray
- Approval: UL94-V0
- RoHS-compliant

\*这里所列的是设计数据，有关产品的变更不在此做说明，未尽事宜请联系客服。用户有责任验证功能、符合适用的法律和指令以及在特定应用中的电气安全。