


HK Series, Screw connection, 4 pin, Male insert

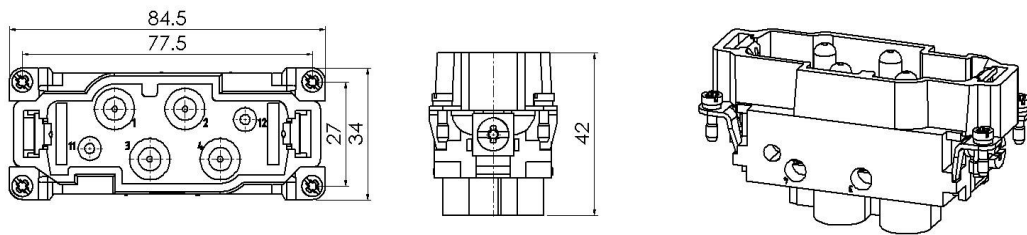

Typecode **HK-004/0-M**
ID **1 007 03 0000099**

Technical Data

Product Properties	
Series	HK
Mating with	H16B
Connection mode	Screw connection
Gender	Male
Rated voltage	830 V
Rated current	80 A
Rated impulse voltage	8 kV
Number of pins	4
Core cross-section/Clamping ability	1.5~ 16 mm ² / 10 AWG
Grounding conductor	Yes
Pollution degree	3
Insulation resistance	$\geq 10^{10} \Omega$
Temperature range	-40 °C ~ +125 °C
Standard	EN 60664-1, IEC 61984

Insert	
Material	PC
Colour	Gray (RAL 7032)

Commercial data	
Weight	0.113 kg
Packaging unit	5 pcs
Country of origin	CN

Features

- High quality engineering plastics
- Screw connection
- ≥ 500 Mating cycles
- Approval: CE, UL
- RoHS-compliant

*这里所列的是设计数据，有关产品的变更不在此做说明，未尽事宜请联系客服。用户有责任验证功能、符合适用的法律和指令以及在特定应用中的电气安全。