


## HMGB Ethernet module, 4x2PIN

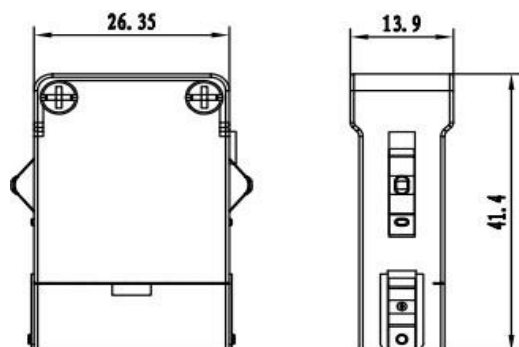

**Model Number** HMGB-008-MC-1

**Item No.** 1 007 04 000 0096

### Technical data

#### Product attributes

Series	HMMB
classification	Male module
Number of stitches	4x2 + PE
Rated current	5A
Rated voltage	50V
Rated pulse voltage	0.8 kV

#### Technical parameters

Insulation impedance	$> 10^{10} \Omega$
Operating temperature	-40 °C ... 85 °C
Insulator material	Polycarbonate (PC)
Conductor material	Zinc alloy
Degree of contamination	3
Surface Treatment	Passivation
Pluggable times	$\geq 500$

#### Business data

Packaging Unit	2 pc
Place of Origin	CN

**Weight** 0.004 Kg

\* The design data listed here, and the changes related to the products will not be explained here. Please contact customer service for uncovered matters. It is the user's responsibility to verify functionality, compliance with applicable laws and directives, and electrical safety in specific applications.

### peculiarity

- Ethernet module
- UL94-V0
- 4x2 + PE