




## HSB series, screw connection, 4pin, mother ferrule

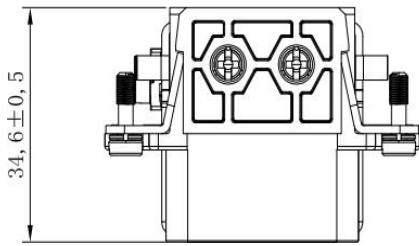

### Model HSB-004-F

#### Technical data

##### Product attributes

Series	HSB
Applicable to	H6B
Wiring mode	Screw connection
classification	Mother
Line voltage	400V
Phase voltage	690V
Rated current	35A
Rated pulse voltage	6kV
Number of stitches	4
Contact adapter wire diameter	1.5 ~ 6 mm <sup>2</sup> /AWG10
Grounding	have
Contamination level	3
Insulation resistance	≥ 10 <sup>10</sup> Ω
Operating temperature	-40°C~+125°C
Compliance with criteria	EN 60664-1 IEC 61984

##### Material

Ferrule material	Polycarbonate (PC)
Ferrule color	Pebble (RAL 7032)

##### Business data

Weight	0.050 kg
Packaging Unit	5 pcs
Place of Origin	CN

#### peculiarity

- High quality imported engineering plastics
- Screw connection
- Number of plugging and unplugging ≥ 500
- CE, RoHS certification