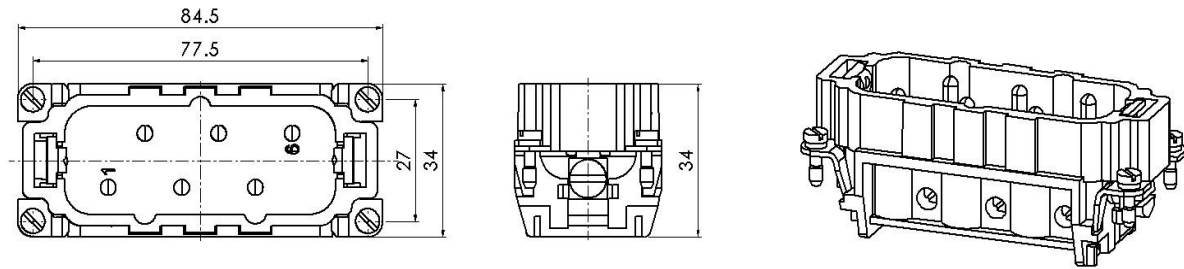


HSB Series, Screw connection, 6 pin, Male insert

Typecode **HSB-006-M**
ID **1 007 03 0000095**

Technical Data**Product Properties**

Series	HSB
Mating with	H16B
Connection mode	Screw connection
Gender	Male
Line Voltage	400 V
Phase voltage	690 V
Rated current	35 A
Rated impulse voltage	6 kV
Number of pins	6
Core cross-section/Clamping ability	1.5 ~ 6 mm ² / 10 AWG
Grounding conductor	Yes
Pollution degree	3
Insulation resistance	≥10 ¹⁰ Ω
Temperature range	-40 °C ~ +125 °C
Standard	EN 60664-1, IEC 61984

Insert

Material	PC
Colour	Gray (RAL 7032)

Commercial data

Weight	0.083 kg
Packaging unit	5 pcs
Country of origin	CN

Features

- High quality engineering plastics
- Screw connection
- ≥500 Mating cycles
- Approval: CE, UL
- RoHS-compliant

*这里所列的是设计数据，有关产品的变更不在此做说明，未尽事宜请联系客服。用户有责任验证功能、符合适用的法律和指令以及在特定应用中的电气安全。