




### Features :

- Constant current mode power supply
- Universal AC input/Full range
- Fully encapsulated with IP67 level
- Protections: Short circuit/Over current
- Small and compact size
- UL1310 Class 2 power unit, pass LPS
- 100% full load burn-in test
- Suitable for LED lighting and moving sign applications
- 2 years warranty

### SPECIFICATION:

MODEL		LA60-1050	LA60-1400	LA60-1750
OUTPUT	DC VOLTAGE	60V	42V	36V
	DC VOLTAGE RANGE	12-60V	9-42V	9-36V
	CURRENT RANGE	1050mA $\pm$ 3%	1400mA $\pm$ 3%	1750mA $\pm$ 3%
	RATED POWER	63W	58.8W	63W
	RIPPLE & NOISE (max.)	300mVp-p	200mVp-p	200mVp-p
	VOLTAGE TOLERANCE	$\pm$ 3.0%		
	LINE REGULATION	$\pm$ 1.0%		
	LOAD REGULATION	$\pm$ 2.0%		
	SETUP,RISE TIME	500ms,250ms/230VAC 500ms,250ms/115ac at full load		
	HOLD UP TIME (Typ.)	50ms/230VAC 24ms/115VAC at full load		
INPUT	VOLTAGE RANGE	100-240VAC		
	FREQUENCY RANGE	47~63Hz		
	EFFICIENCY (Typ.)	85% full load	85% full load	85% full load
	AC CURRENT	1.4A/100AC 0.7A/240AC		
	INRUSH CURRENT (max.)	COLD STAT 70A/230VAC		
	LEAKAGE CURRENT	0.25mA/240VAC		
PROTECT ON	OVER CURRENT	Above 105% rated output power.		
		Protection type: Hiccup mode, recovers automatically after fault condition is removed.		
	OVER TEMPERATURE	Tj 140℃ typically(U1) Detect on main control IC		
		Protection type: Hiccup mode, recovers automatically after temperature goes down		
ENVIRONMENT	WORKING TEMP.	-10~50℃		
	WORKING HUMIDITY	20~90% RH non-condensing		
	STORAGE TEMP., HUMIDITY	-40~80℃, 10~95% RH		
	TEMP.COEFFICIENT	$\pm$ 0.03%/℃ (0~50℃)		
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X,Y, Z axes		
SAFETY & EMC	SAFETY STANDARDS	Design refer to UL1310 Class 2,TUV EN60950-1, EN61347-2-13, CAN/CSA C22.2 No. 223-M91, meet IP67		
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC		
	ISOLATION RESISTANCE	I/P-O/P:>100M Ohms / 500VDC / 25~70% RH		
	EMI CONDUCTION & RADIATION	Compliance to EN55022 (CISPR22) Class B		
	HARMONIC CURRENT	Compliance to EN61000-3-2,-3		
	EMS IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11; ENV50204, EN55024, light industry level, criteria A		
DIMENSION		162*42.5*30mm (L*W*H)		

**Mechanical Specification**

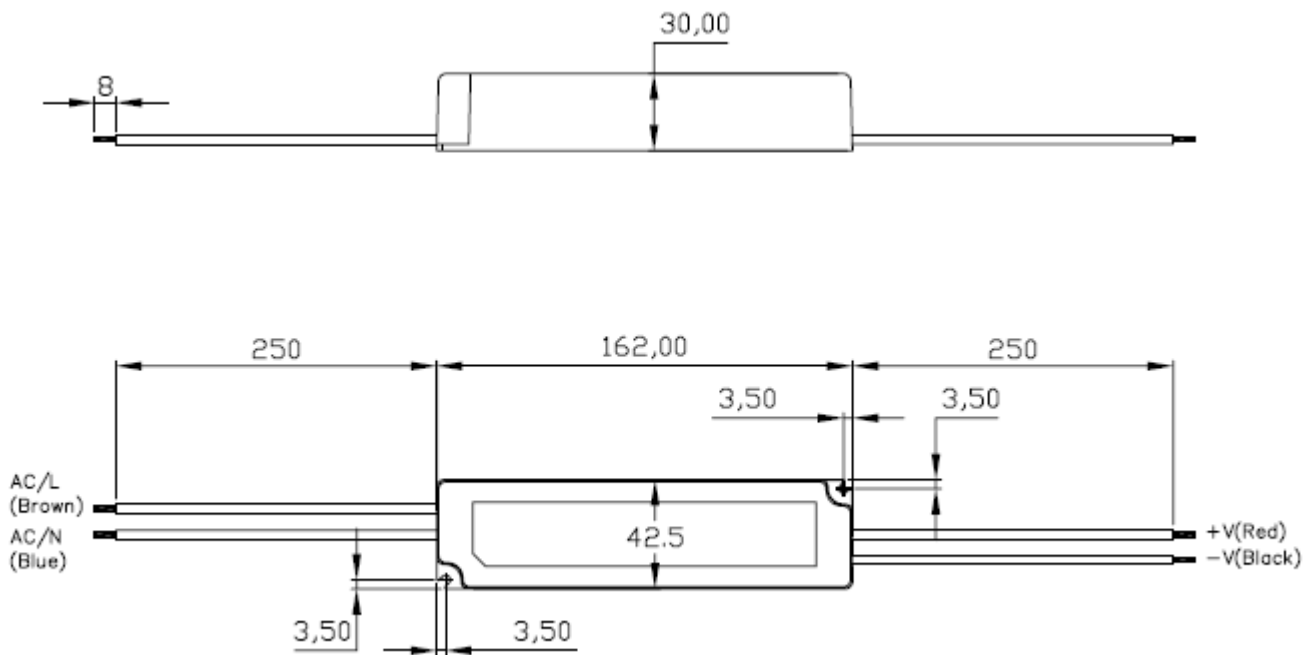

**Block Diagram**

