

## GK800 series


### ■ Features

- AC input range selected by switch
- Class II power
- Protections : Short circuit /overload/over voltage/ over temp.
- Forced air cooling by build-in fan
- 100% full load burn-in test
- Approvals : UL/CE/CCC
- 1 year warranty



### SPECIFICATION

Model		GK-800-12	GK-800-15	GK-800-24	GK-800-48
Output	DC Voltage	12V	15V	24V	48V
	Rated Current	66A	54A	33A	16.5A
	Current Range	0-66A	0-54A	0-33A	0-16.5A
	Rated Power	792W	810W	792W	792W
	Ripple & Noise	150mVp-p	150mVp-p	240mVp-p	480mVp-p
	Voltage ADJ. Range	10.8-13.2V	13.5-16.5V	21.6-26.4V	43.2-52.8V
	Voltage Tolerance	±1.5%	±1.0%	±1.0%	±1.0%
	Line Regulation	±0.5%	±0.5%	±0.5%	±0.5%
	Load Regulation	±1.0%	±0.5%	±0.5%	±0.5%
	Set up , rise time	800ms, 50ms/230Vac at full load			
	Hold Time	16ms/230Vac at full load			
Input	Voltage Range	90~130Vac , 185Vac~260Vac			
	Frequency Range	47~63Hz			
	Efficiency	81% 230Vac	82% 230Vac	86% 230Vac	88% 230Vac
	AC current	8A/115Vac 13A/230Vac			
	Inrush Current	Cold start 60A/230Vac			
	Leakage Current	<0.75mA 240Vac			
Protection	Over load protection	105%-135% rated output power Delay shutdown			
	Over voltage protection	13.8~16.2V	17.25~20.25V	27.6~32.4V	55.2~64.8V
Environment	Working temp.	-10~ +60°C (refer to output derating curve)			
	Working Humidity	20~90%RH non-condensing			
	Storage Temp., Humidity	-20~+85°C , 10~95% RH			
	Temp. Coefficient	±0.03%/°C (0~50°C)			
	Vibration	10~500Hz, 2G 10min./1cycle , period for 60min , each along X, Y, Z axes			
Safety & EMC	Safety Standard	UL1012,TUV EN60950-1 approved .			
	Withstand Voltage	I/P-O/P:3KVac , I/O-FG:1.5KVac, O/P-FG:0.5KVac			
	Isolation Resistance	I/P-O/P,I/P-FG,O/P-FG:100M Ohms/500Vdc			
	EMI Conduction& Radiation	Compliance to EN55022 Class B			
	Harmonic Current	Compliance to EN61000-3-2,-3			
	EMS Immunity	Compliance to EN61000-4-2,3,4,5,EN55024			
Others	MTBF	50,000hours min 25°C			
	Dimension	291x133x68			
	Weight	2.7KGS/PC			

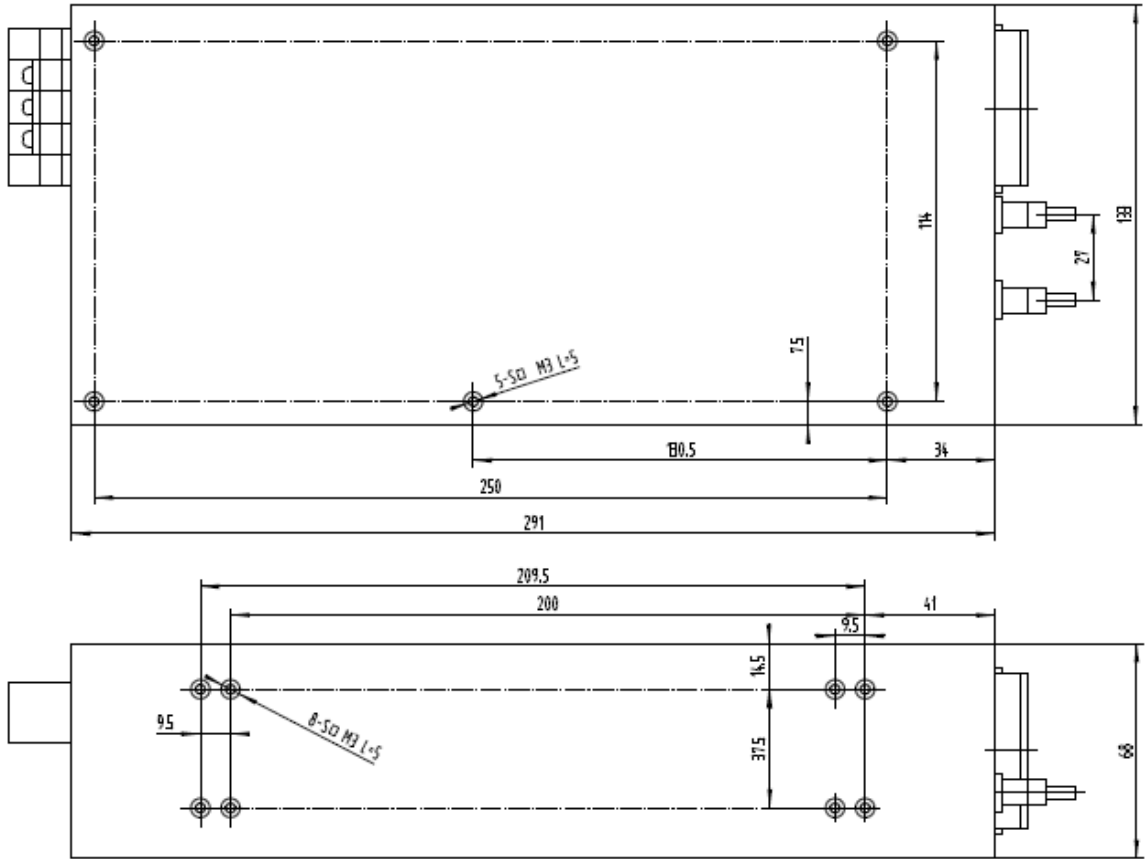

**HGPOWER<sup>®</sup>**  
GK800