



HIGH VOLTAGE MOSFET (N-CHANNEL)
FEATURES

- Low on-resistance: $V_{DS}=100V, R_{DS(ON)}=220m\Omega @ V_{GS}=10V, I_D=1.6A$
- Low Input Capacitance
- Fast Switching Speed
- Low Input/Output Leakage
- Surface Mount device


SOT-23

MECHANICAL DATA

- Case: SOT-23
- Case Material: Molded Plastic. UL flammability
- Classification Rating: 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Weight: 0.008 grams (approximate)

MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-source voltage	V_{DS}	100	V
Gate-source voltage	V_{GS}	± 16	V
Continuous drain current	I_D	1.6	A
Pulsed drain current (Note 1)	I_{DM}	8	A
Power dissipation	P_D	1.3	W
Thermal resistance from Junction to ambient	$R_{\theta JA}$	177	$^\circ\text{C}/\text{W}$
Junction temperature	T_J	150	$^\circ\text{C}$
Storage temperature	T_{STG}	-55 ~ +150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
STATIC CHARACTERISTICS						
Drain-Source breakdown voltage	$V_{(BR)DSS}$	100			V	$V_{GS}=0V, I_D=250\mu A$
Zero gate voltage drain current	I_{DSS}			1	μA	$V_{DS}=100V, V_{GS}=0V$
Gate-body leakage current	I_{GSS}			± 100	nA	$V_{DS}=0V, V_{GS}=\pm 16V$
Gate-threshold voltage (note 1)	$V_{GS(th)}$	1		2.5	V	$V_{DS}=V_{GS}, I_D=250\mu A$
Drain-source on-resistance (note 1)	$R_{DS(ON)}$			220	m Ω	$V_{GS}=10V, I_D=1.6A$
				250	m Ω	$V_{GS}=4.5V, I_D=1.3A$
Diode forward voltage (note 1)	V_{SD}		0.7	1.2	V	$I_S=1.1A, V_{GS}=0V$
DYNAMIC CHARACTERISTICS						
Input capacitance	C_{iss}		401		pF	$V_{DS}=25V, V_{GS}=0V, f=1\text{MHz}$
Output capacitance	C_{oss}		22		pF	
Reverse transfer capacitance	C_{rss}		17		pF	
Gate Resistance	R_g		2.1		Ω	$V_{DS}=0V, V_{GS}=0V, f=1\text{MHz}$
Total gate charge	Q_g		4.1		nC	$V_{DD}=50V, V_{GS}=4.5V, I_D=1.6A$
			8.3		nC	
Gate-source charge	Q_{gs}		1.5		nC	$V_{DD}=50V, V_{GS}=10V, I_D=1.6A$
Gate-drain charge	Q_{gd}		2		nC	
Turn-on delay time	$t_{d(on)}$		6.8		nS	$V_{DS}=50V, V_{GS}=4.5V, R_{GEN}=6.8\Omega, I_D=1A$
Turn-on rise time	t_r		8.2		nS	
Turn-off delay time	$t_{d(off)}$		7.9		nS	
Turn-off fall time	t_f		3.6		nS	
Reverse Recovery Time	t_{rr}				nS	
Reverse Recovery Charge	Q_{rr}		9.8		nC	$I_F=1.1A, di/dt=100A/\mu S$

Note: 1. Pulse test ; Pulse width $\leq 300\mu s$, Duty cycle $\leq 2\%$.

HIGH VOLTAGE MOSFET (N-CHANNEL)

Typical Characteristics

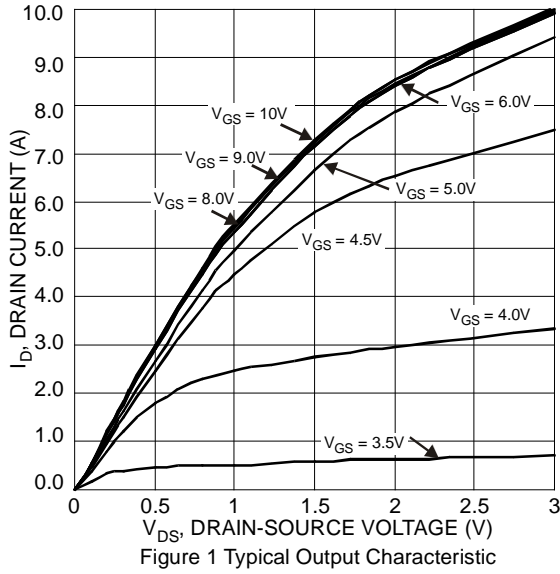


Figure 1 Typical Output Characteristic

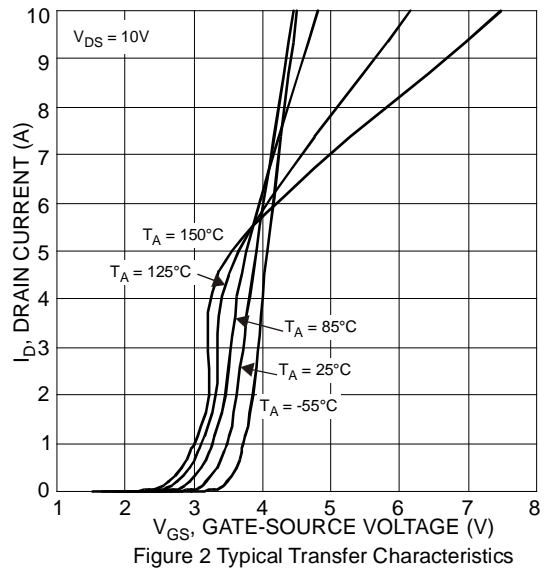


Figure 2 Typical Transfer Characteristics

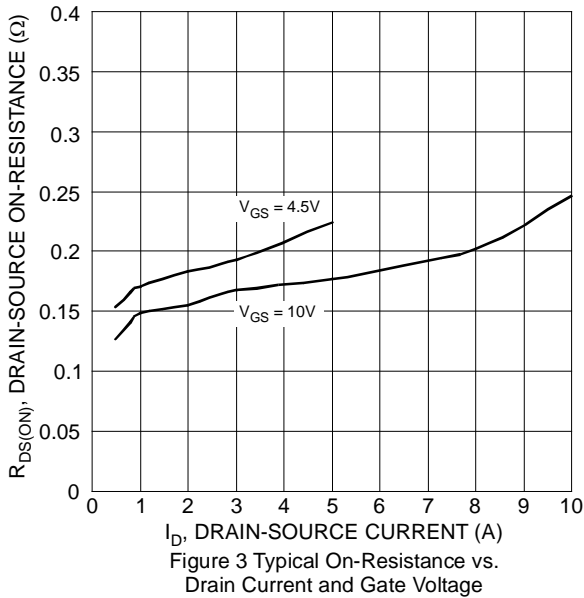


Figure 3 Typical On-Resistance vs. Drain Current and Gate Voltage

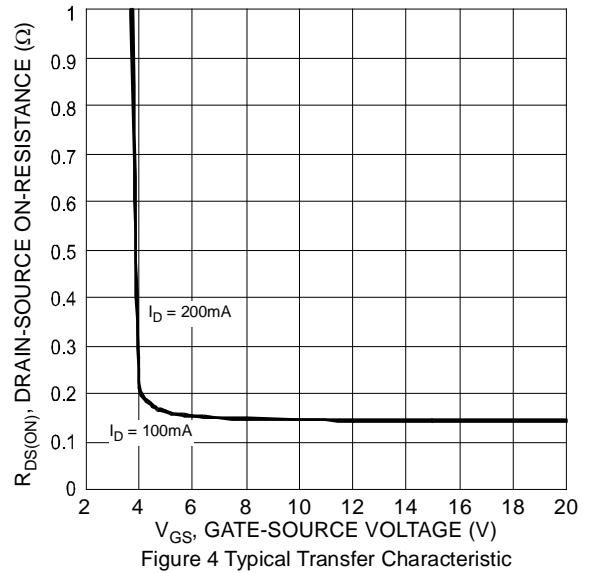


Figure 4 Typical Transfer Characteristic

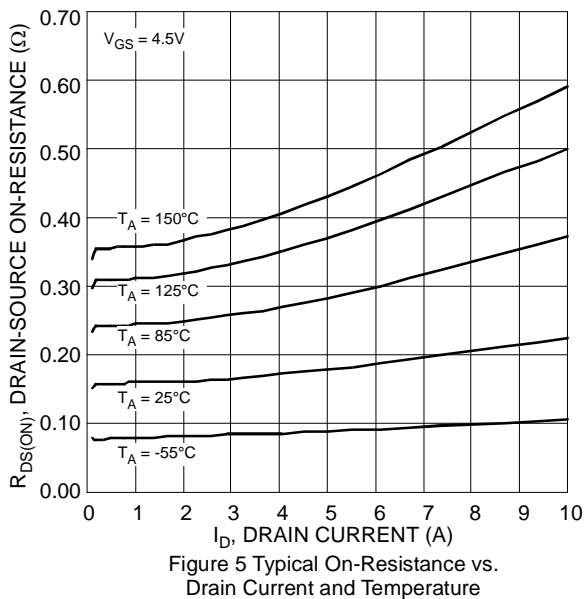


Figure 5 Typical On-Resistance vs. Drain Current and Temperature

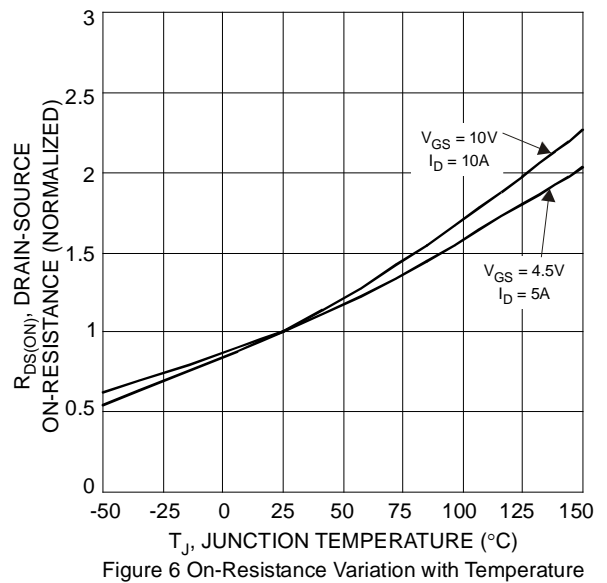


Figure 6 On-Resistance Variation with Temperature

HIGH VOLTAGE MOSFET (N-CHANNEL)

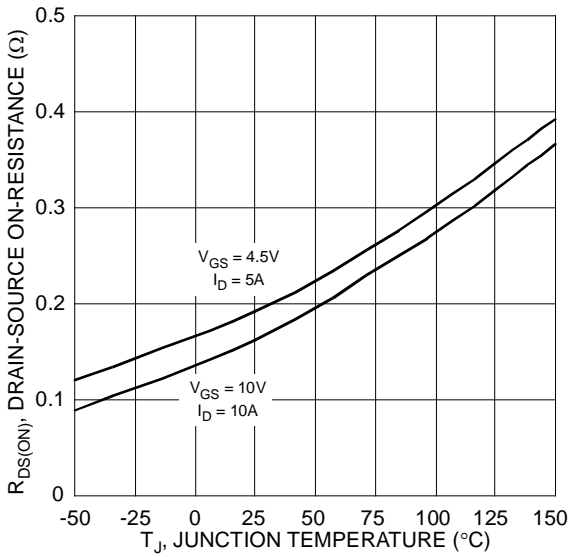


Figure 7 On-Resistance Variation with Temperature

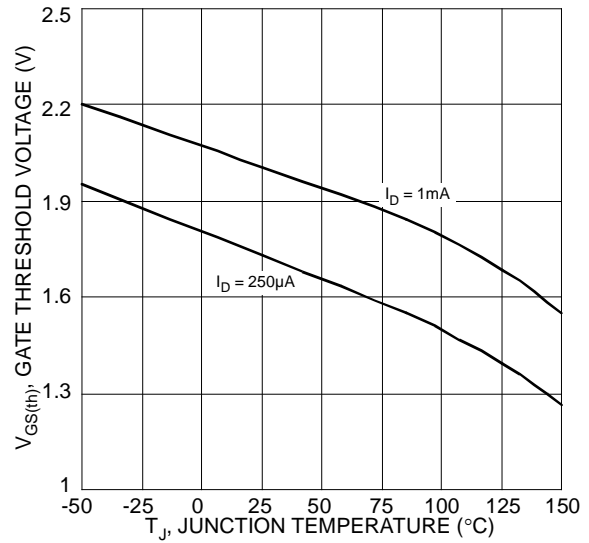


Figure 8 Gate Threshold Variation vs. Ambient Temperature

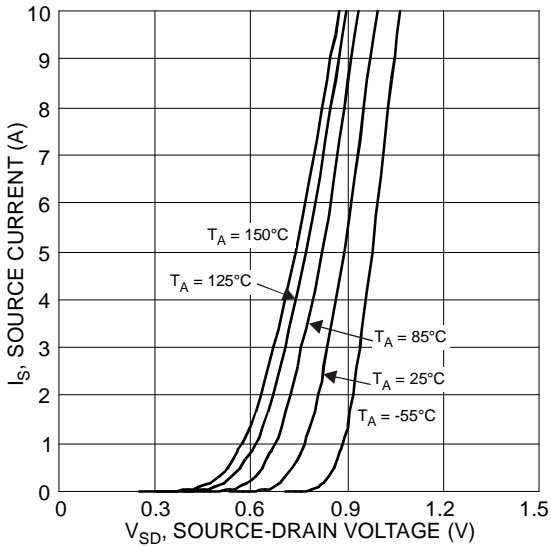


Figure 9 Diode Forward Voltage vs. Current

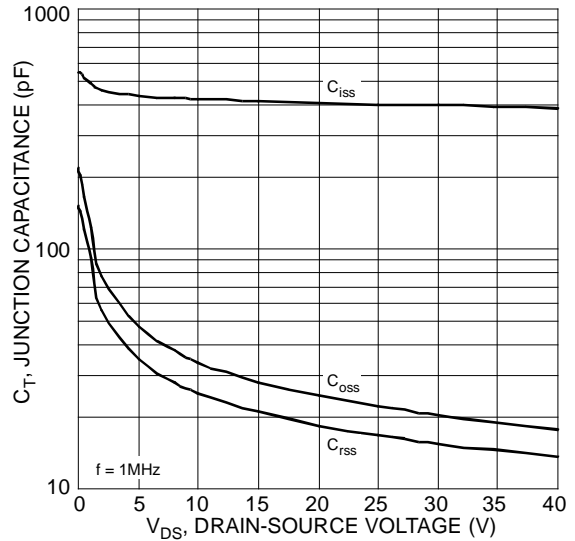


Figure 10 Typical Junction Capacitance



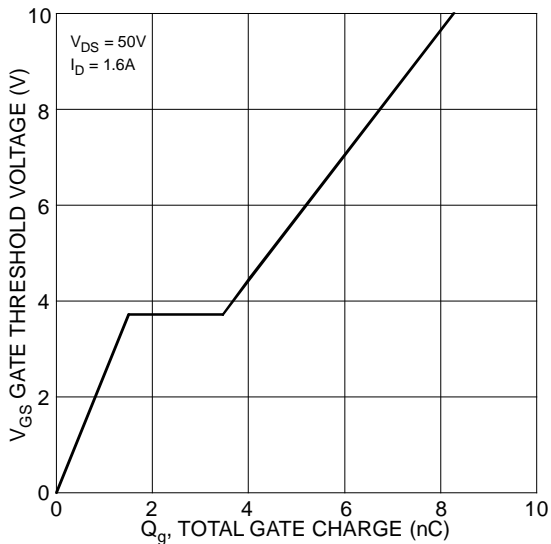



Figure 11 Gate Charge

HIGH VOLTAGE MOSFET (N-CHANNEL)

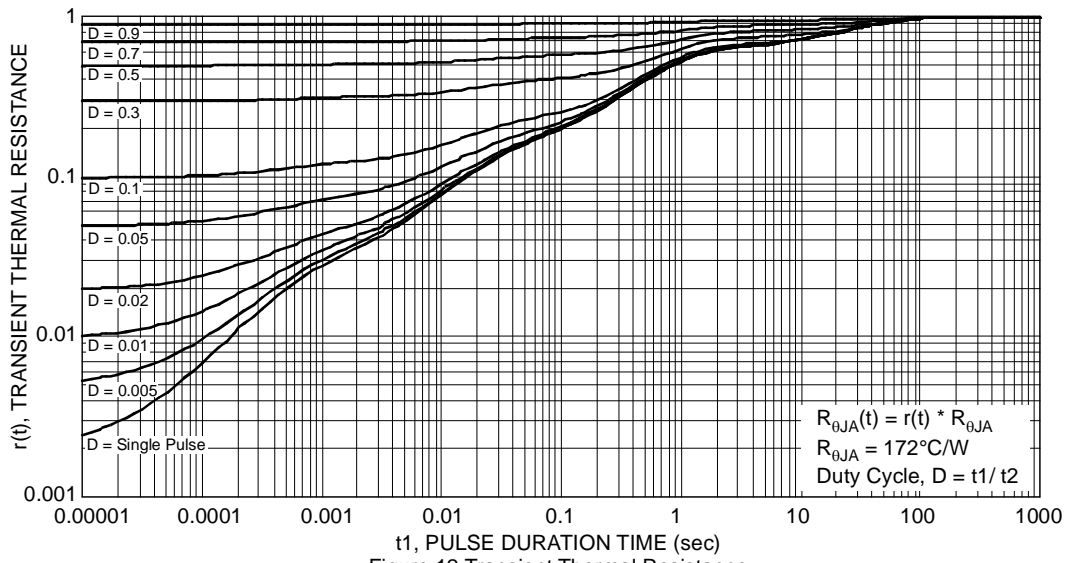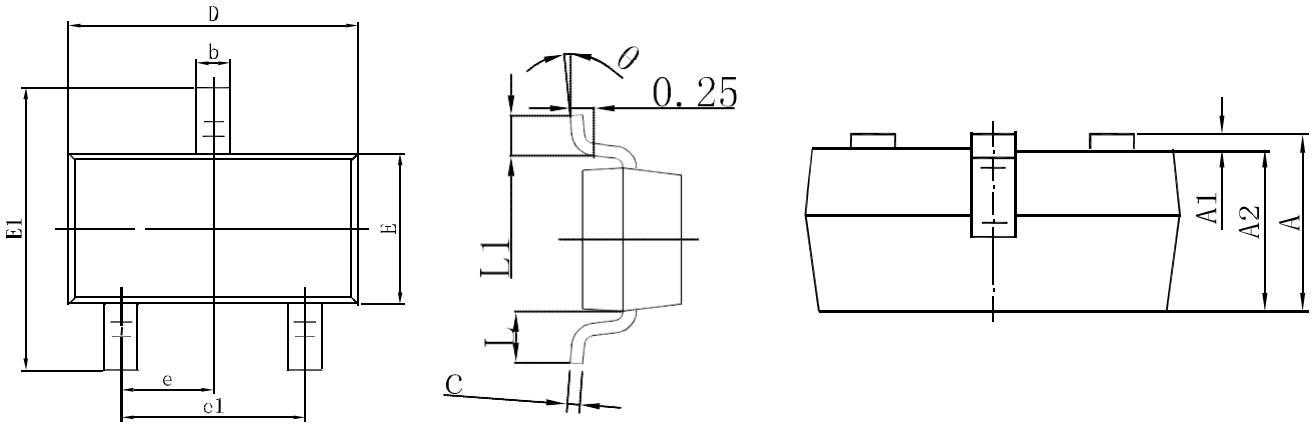

HIGH VOLTAGE MOSFET (N-CHANNEL)
SOT-23 Package Outline Dimensions


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

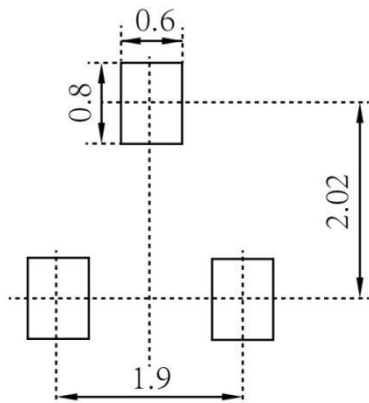
SOT-23 Suggested Pad Layout

Note:

1. Controlling dimension: in millimeters
2. General tolerance: $\pm 0.05\text{mm}$
3. The pad layout is for reference purposes only

HIGH VOLTAGE MOSFET (N-CHANNEL)


SOT-23 Tape and Reel

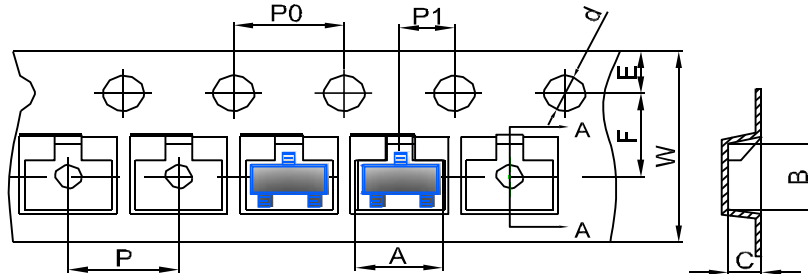SOT-23 Embossed Carrier Tape




DIMENSIONS ARE IN MILLIMETER										
TYPE	A	B	C	d	E	F	P0	P	P1	W
SOT-23	3.15	2.77	1.22	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00
TOLERANCE	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1

SOT-23 Tape Leader and Trailer

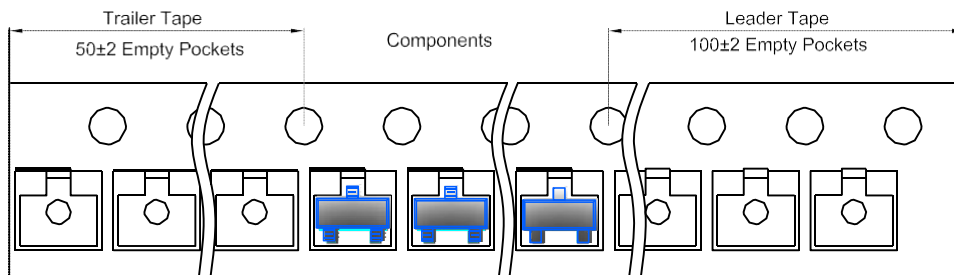

SOT-23 Reel

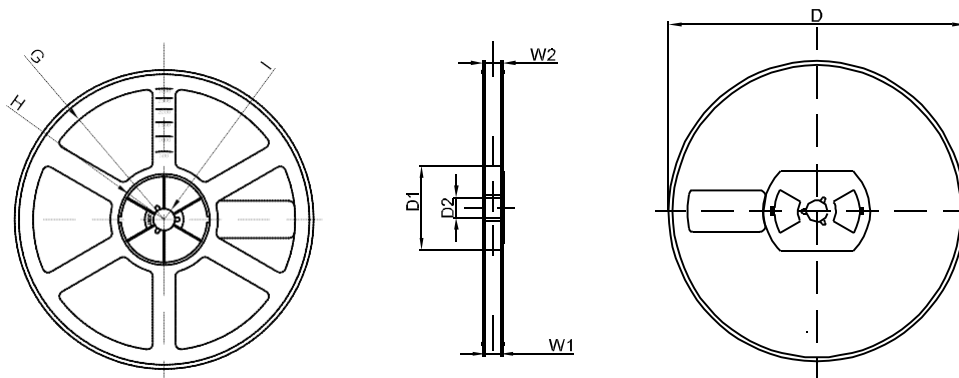

DIMENSIONS ARE IN MILLIMETER								
REEL OPTION	D	D1	D2	G	H	I	W1	W2
7" DIA	Ø178	54.40	13.00	R78	R25.60	R6.50	9.50	12.30
TOLERANCE	±2	±1	±1	±1	±1	±1	±1	±1