

DH150 Series

150W Single Output LED Driver



■ Features

- Constant voltage and current output
- Universal AC input 100~305VAC
- Built-in active PFC function
- High efficiency
- Output protections: Short circuit/Over voltage/Over load
- Fixed derating-cutoff type temperature protection
- Cooling by free air convection
- Digital, analog or DALI control dimming function
- Suitable for inside of the outdoor LED luminaires
- IP65 with Vo/Io adjusting screws, IP67 without Vo/Io adjusting screws
- Compliance to worldwide safety regulations for lighting
- Suitable for dry/damp/wet locations



IP65/67



■ General functions

Output Power	150W	Input Frequency	50/60Hz
Input Voltage Range	100~305Vac	Operating Temperature	-40°C~+60°C
Storage Temperature	-45°C~+85°C	Safety & EMC	UL8750, IEC61347, EN55015
Turn-on Delay Time	3.0S max.	Inrush Current	50A at 230Vac, Cold start
Over Temp Protection	Fixed derating-cutoff type temperature protection	Waterproof	IP65/IP67

■ Detailed Specification

TABLE 1:

Model		DH150-048S315X-YY	DH150-036S420X-YY	DH150-024S625X-YY	DH150-020S750X-YY	DH150-012S1250X-YY
Output	DC Voltage	48Vdc	36Vdc	24Vdc	20Vdc	12Vdc
	Constant Current Operation Voltage <small>note.5</small>	28~48Vdc	21~36Vdc	14~24Vdc	12~20Vdc	7~12Vdc
	Rated DC Current	3150 mA	4200 mA	6250 mA	7500mA	12500mA
	Current Range	0~3150mA	0~4200mA	0~6250mA	0~7500mA	0~12500mA
	Dimming Current Range	10~100% rated output current (≥50% rated output voltage)				
	Ripple and Noise	200mVp-p	200mVp-p	150mVp-p	150mVp-p	150mVp-p
	Voltage ADJ. Range <small>note.3</small>	43~50Vdc	32~38Vdc	22~25Vdc	18~21Vdc	11~13Vdc
	Current ADJ. Range <small>note.3</small>	1890~3150mA	2520~4200mA	3750~6250mA	4500~7500mA	7500~12500mA
	Voltage Tolerance	±1%	±1%	±1%	±1.5%	±2.5%
	Voltage Line Regulation	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	Voltage Load Regulation	±0.5%	±0.5%	±0.5%	±1%	±2%
Input	Efficiency	94%	93.5%	93%	93%	92%
	Power Factor	0.97/230Vac	0.97/230Vac	0.97/230Vac	0.97/230Vac	0.97/230Vac
	AC Current	1.8A/100Vac, 0.9A/230Vac				
	Leakage Current	<0.75mA/230Vac; <0.5mA/120Vac				
Output Protection	Over Current	Constant current limiting				
	Short Circuit	Non-dimmer type: recover automatically at hiccup; Dimmer type: Short-circuit power ≤10W.				
	Over Voltage	Shut down at 140% Vo and latch off o/p voltage, re-power on to recover				
Environmental	Operating Humidity	20~95% RH, non-condensing				
	Storage Humidity	10~95% RH				
	Temperature Coefficient	±0.03%/°C (0~50°C)				
	Vibration	10~300Hz, 1G, Period for 60min, each along X、 Y、 Z axes.				
Safety & EMC	Withstand Voltage	I/P-OP: 3.75KVac; IP-FG: 1.56KVac/2.00KVac (remove discharge tube); O/P-FG: 2.00KVac				
	Isolation Resistance	IP-OP, IP-FG, O/P-FG: 100M Ohms/500Vdc/25°C/70% RH				
	EMC Interference	Compliance to EN55015, EN55022 (CISPR22) Class B				
	EMC Emission	Compliance to EN61000-3-2 Class C (≥50%load); EN61000-3-3				
	EMC Immunity	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11; ENV50204, EN61547, EN55024				
Others	Authentication	UL/ CE/RoHS/REACH				
	MTBF	255k Hrs at full load and 30°C ambient conditions per MIL-HDBK-217F				
	Input Over-voltage	Can survive input over-voltage stress of 320Vac for 48 hours				
	Dimensions (mm)	223×68×41.3				
	Max. Case Temp.	Tc max=80°C				
	Net Weight	1.1Kg/pcs				
Note	1. All parameters NOT specially mentioned are measured at 230Vac input, rated load and 25°C of ambient temperature.					
	2. Ripple & noise are measured: at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μf & 47μf parallel capacitor.					
	3. Output voltage and current can be adjusted by internal potentiometer (“A” type only).					
	4. Tolerance: includes set up tolerance, voltage line regulation and voltage load regulation.					
	5. Constant current operation region is within 60% ~100% rated output voltage. This is the suitable operation region for LED related applications, but please reconfirm special electrical requirements for some specific system design.					
	6. Derating may be needed under low input voltages. Please check the Static Characteristics for more details.					
	7. Safety and EMC design refer to EN60598-1, subject 8750 (UL), CNS15233, GB7000.1, FCC part18.					
	8. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.					
	9. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.					

TABLE 2:

Model		DH150-429S035X-YY	DH150-215S070X-YY	DH150-143S105X-YY	DH150-108S140X-YY	DH150-086S175X-YY
Output	DC Voltage	429Vdc	215Vdc	143Vdc	108Vdc	86Vdc
	Constant Current Operation Voltage <small>note.5</small>	258 ~429Vdc	129 ~215Vdc	86 ~143Vdc	64 ~108Vdc	52 ~86Vdc
	Rated DC Current	350 mA	700 mA	1050 mA	1400 mA	1750 mA
	Current Range	0~350mA	0~700mA	0~1050mA	0~1400mA	0~1750mA
	Dimming Current Range	10~100% rated output current (≥50% rated output voltage)				
	Ripple and Noise	2%Vo	2%Vo	2%Vo	2%Vo	2%Vo
	Voltage ADJ. Range <small>note.3</small>	386~450Vdc	194~226Vdc	129~150Vdc	97~113Vdc	77~90Vdc
	Current ADJ. Range <small>note.3</small>	210~350mA	420~700mA	630~1050mA	840~1400mA	1050~1750mA
	Voltage Tolerance	±1%	±1%	±1%	±1%	±1%
	Voltage Line Regulation	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	Voltage Load Regulation	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
Input	Efficiency	93%	93%	93%	92%	92%
	Power Factor	0.97/230Vac	0.97/230Vac	0.97/230Vac	0.97/230Vac	0.97/230Vac
	AC Current	1.8A/100Vac, 0.9A/230Vac				
	Leakage Current	<0.75mA/230Vac; <0.5mA/120Vac				
Output Protection	Over Current	Constant current limiting				
	Short Circuit	Non-dimmer type: recover automatically at hiccup; Dimmer type: Short-circuit power ≤10W.				
	Over Voltage	Shut down at 140% Vo and latch off o/p voltage, re- power on to recover				
Environmental	Operating Humidity	20~95% RH, non-condensing				
	Storage Humidity	10~95% RH				
	Temperature Coefficient	±0.03%/°C (0~50 °C)				
	Vibration	10~300Hz, 1G, Period for 60min, each along X、 Y、 Z axes.				
Safety & EMC	Withstand Voltage	I/P-OP: 3.75KVac; IP-FG: 1.56KVac/2.00KVac (remove discharge tube); O/P-FG: 2.00KVac				
	Isolation Resistance	IP-OP, IP-FG, O/P-FG: 100M Ohms/500Vdc/25°C/70% RH				
	EMC Interference	Compliance to EN55015, EN55022 (CISPR22) Class B				
	EMC Emission	Compliance to EN61000-3-2 Class C (≥50%load); EN61000-3-3				
	EMC Immunity	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11; ENV50204, EN61547, EN55024				
Others	Authentication	CE/RoHS/REACH				
	MTBF	255k Hrs at full load and 30°C ambient conditions per MIL-HDBK-217F				
	Input Over-voltage	Can survive input over-voltage stress of 320Vac for 48 hours				
	Dimensions (mm)	223×68×41.3				
	Max. Case Temp.	Tc max=80 °C				
	Net Weight	1.1Kg/pcs				
	Note	1. All parameters NOT specially mentioned are measured at 230Vac input, rated load and 25 °C of ambient temperature.				
2. Ripple & noise are measured: at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1µf & 47µf parallel capacitor.						
3. Output voltage and current can be adjusted by internal potentiometer (“A” type only).						
4. Tolerance: includes set up tolerance, voltage line regulation and voltage load regulation.						
5. Constant current operation region is within 60% ~100% rated output voltage. This is the suitable operation region for LED related applications, but please reconfirm special electrical requirements for some specific system design.						
6. Derating may be needed under low input voltages. Please check the Static Characteristics for more details.						
7. Safety and EMC design refer to EN60598-1, subject 8750 (UL), CNS15233, GB7000.1, FCC part18.						
8. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.						
9. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.						

TABLE 3:

Model		DH150-072S210X-YY	DH150-062S245X-YY	DH150-054S280X-YY	DH150-043S350X-YY	DH150-031S490X-YY
Output	DC Voltage	72Vdc	62Vdc	54Vdc	43Vdc	31Vdc
	Constant Current Operation Voltage <small>note.5</small>	43~72Vdc	37~62Vdc	32 ~54Vdc	26~43Vdc	18~31Vdc
	Rated DC Current	2100 mA	2450 mA	2800 mA	3500 mA	4900 mA
	Current Range	0~2100mA	0~2450mA	0~2800mA	0~3500mA	0~4900mA
	Dimming Current Range	10~100% rated output current (≥50% rated output voltage)				
	Ripple and Noise	2%Vo	2%Vo	200mVp-p	200mVp-p	200mVp-p
	Voltage ADJ. Range <small>note.3</small>	65~76Vdc	56~65Vdc	49~57Vdc	39~45Vdc	28~33Vdc
	Current ADJ. Range <small>note.3</small>	1260~2100mA	1470~2450mA	1680~2800mA	2100~3500mA	2940~4900mA
	Voltage Tolerance	±1%	±1%	±1%	±1%	±1%
	Voltage Line Regulation	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	Voltage Load Regulation	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
Input	Efficiency	92%	92%	94%	94%	93.5%
	Power Factor	0.97/230Vac	0.97/230Vac	0.97/230Vac	0.97/230Vac	0.97/230Vac
	AC Current	1.8A/100Vac, 0.9A/230Vac				
	Leakage Current	<0.75mA/230Vac; <0.5mA/120Vac				
Output Protection	Over Current	Constant current limiting				
	Short Circuit	Non-dimmer type: recover automatically at hiccup; Dimmer type: Short-circuit power ≤10W.				
	Over Voltage	Shut down at 140% Vo and latch off o/p voltage, re- power on to recover				
Environmental	Operating Humidity	20~95% RH, non-condensing				
	Storage Humidity	10~95% RH				
	Temperature Coefficient	±0.03%/°C (0~50 °C)				
	Vibration	10~300Hz, 1G, Period for 60min, each along X、 Y、 Z axes.				
Safety & EMC	Withstand Voltage	I/P-OP: 3.75KVdc; IP-FG: 1.56KVdc/2.00KVdc (remove discharge tube); O/P-FG: 2.00KVdc				
	Isolation Resistance	IP-OP, IP-FG, O/P-FG: 100M Ohms/500Vdc/25°C/70% RH				
	EMC Interference	Compliance to EN55015, EN55022 (CISPR22) Class B				
	EMC Emission	Compliance to EN61000-3-2 Class C (≥50%load); EN61000-3-3				
	EMC Immunity	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11; ENV50204, EN61547, EN55024				
Others	Authentication	CE/RoHS/REACH				
	MTBF	255k Hrs at full load and 30°C ambient conditions per MIL-HDBK-217F				
	Input Over-voltage	Can survive input over-voltage stress of 320Vac for 48 hours				
	Dimensions (mm)	223×68×41.3				
	Max. Case Temp.	Tc max=80°C				
	Net Weight	1.1Kg/pcs				
Note	1. All parameters NOT specially mentioned are measured at 230Vac input, rated load and 25°C of ambient temperature.					
	2. Ripple & noise are measured: at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μf & 47μf parallel capacitor.					
	3. Output voltage and current can be adjusted by internal potentiometer (“A” type only).					
	4. Tolerance: includes set up tolerance, voltage line regulation and voltage load regulation.					
	5. Constant current operation region is within 60% ~100% rated output voltage. This is the suitable operation region for LED related applications, but please reconfirm special electrical requirements for some specific system design.					
	6. Derating may be needed under low input voltages. Please check the Static Characteristics for more details.					
	7. Safety and EMC design refer to EN60598-1, subject 8750 (UL), CNS15233, GB7000.1, FCC part18.					
	8. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.					
	9. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.					

TABLE 4:


Model		DH150-026S595X-YY	DH150-015S1000X-YY			
Output	DC Voltage	26Vdc	15Vdc			
	Constant Current Operation Voltage <small>note.5</small>	15~26Vdc	9~15Vdc			
	Rated DC Current	5950 mA	10000 mA			
	Current Range	0~5950mA	0~10000mA			
	Dimming Current Range	10~100% rated output current (≥50% rated output voltage)				
	Ripple and Noise	150mVp-p	150mVp-p			
	Voltage ADJ. Range <small>note.3</small>	23~27Vdc	14~16Vdc			
	Current ADJ. Range <small>note.3</small>	3570~5950mA	6000~10000mA			
	Voltage Tolerance	±1%	±2%			
	Voltage Line Regulation	±0.5%	±0.5%			
	Voltage Load Regulation	±0.5%	±1.5%			
Input	Efficiency	93%	92%			
	Power Factor	0.97/230Vac	0.97/230Vac			
	AC Current	1.8A/100Vac, 0.9A/230Vac				
	Leakage Current	<0.75mA/230Vac; <0.5mA/120Vac				
Output Protection	Over Current	Constant current limiting				
	Short Circuit	Non-dimmer type: recover automatically at hiccup; Dimmer type: Short-circuit power ≤10W.				
	Over Voltage	Shut down at 140% Vo and latch off o/p voltage, re-power on to recover				
Environmental	Operating Humidity	20~95% RH, non-condensing				
	Storage Humidity	10~95% RH				
	Temperature Coefficient	±0.03%/°C (0~50°C)				
	Vibration	10~300Hz, 1G, Period for 60min, each along X、 Y、 Z axes.				
Safety & EMC	Withstand Voltage	I/P-OP: 3.75KVac; IP-FG: 1.56KVac/2.00KVac (remove discharge tube); O/P-FG: 2.00KVac				
	Isolation Resistance	IP-OP, IP-FG, O/P-FG: 100M Ohms/500Vdc/25°C/70% RH				
	EMC Interference	Compliance to EN55015, EN55022 (CISPR22) Class B				
	EMC Emission	Compliance to EN61000-3-2 Class C (≥50%load); EN61000-3-3				
	EMC Immunity	Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11; ENV50204, EN61547, EN55024				
Others	Authentication	CE/RoHS/REACH				
	MTBF	255k Hrs at full load and 30°C ambient conditions per MIL-HDBK-217F				
	Input Over-voltage	Can survive input over-voltage stress of 320Vac for 48 hours				
	Dimensions (mm)	223×68×41.3				
	Max. Case Temp.	Tc max=80°C				
	Net Weight	1.1Kg/pcs				
Note	1. All parameters NOT specially mentioned are measured at 230Vac input, rated load and 25 °C of ambient temperature.					
	2. Ripple & noise are measured: at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μf & 47μf parallel capacitor.					
	3. Output voltage and current can be adjusted by internal potentiometer (“A” type only).					
	4. Tolerance: includes set up tolerance, voltage line regulation and voltage load regulation.					
	5. Constant current operation region is within 60% ~100% rated output voltage. This is the suitable operation region for LED related applications, but please reconfirm special electrical requirements for some specific system design.					
	6. Derating may be needed under low input voltages. Please check the Static Characteristics for more details.					
	7. Safety and EMC design refer to EN60598-1, subject 8750 (UL), CNS15233, GB7000.1, FCC part18.					
	8. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.					
	9. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.					

■ Part number code


D	H	150	-	024	S	625	A	-	TA
Lighting products		Output power(W): three numbers Filled 0 in front of it when less than 3.			Output voltage(V): three numbers Filled 0 in front of it when less than 3. For example: 143 means 143V, 024 means 24V		Output current(x10mA): three numbers Filled 0 in front of it when less than 3; four numbers are available if needed. For example: 625 means 6250mA, 035 means 350mA		
E: Economic LED driver R: High performance LED driver H: High efficiency LED driver					Optional mode: one letter Default: no additional features A: output voltage and current can be adjusted		Optional mode: two letters Default: no additional features TA: DALI dimming function, isolated output TC: 3 in 1 dimming function (PWM, resistance, voltage) TE: Customized timeshare dimming TF: Programmable timeshare dimming		
					Output channel: one letter S: Single channel output D: Double channel output T: Triple channel output Q: Quadruple channel output F: Quintuple channel output H: sextuple channel output				

For example: DH150-024S625A-TA means: high efficiency LED driver; output power 150W; output voltage 24Vdc; output current 6250mA; single output; output voltage and current can be adjusted; with DALI dimming function and isolated output.


■ wiring diagram

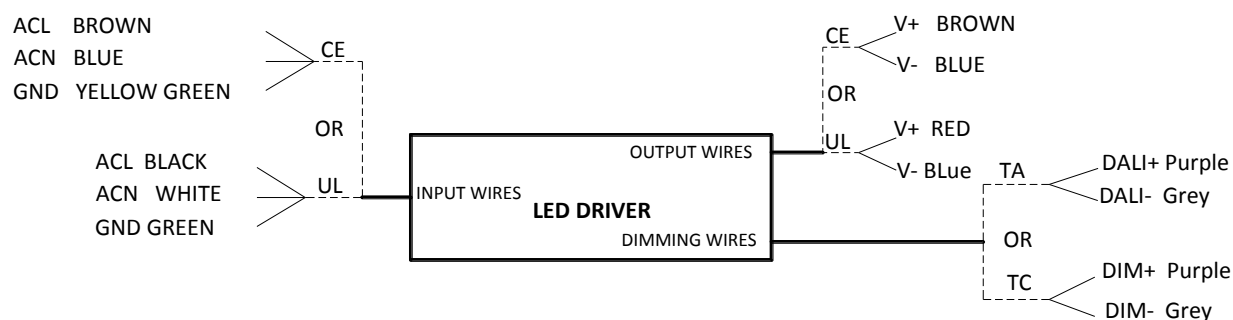


■ Derating Curve

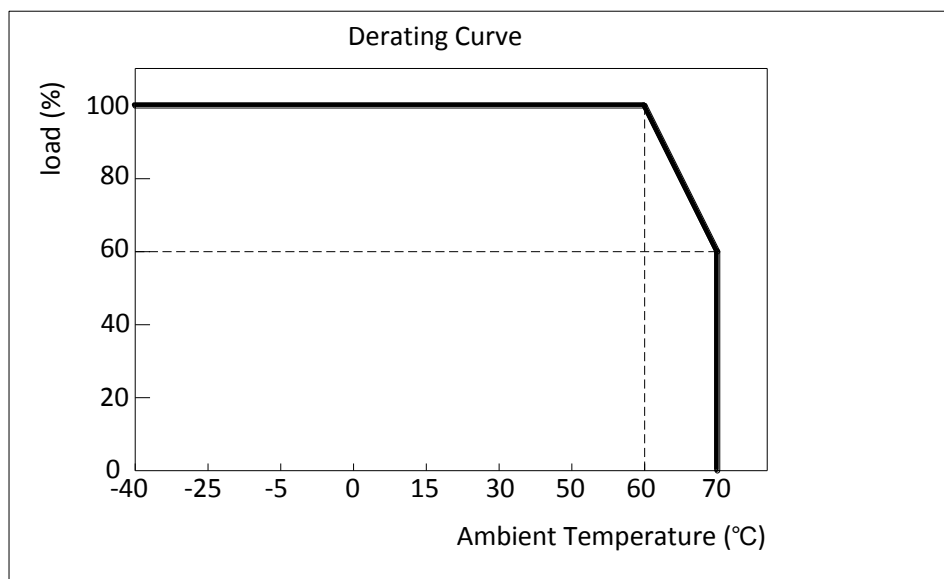


■ Static Characteristics

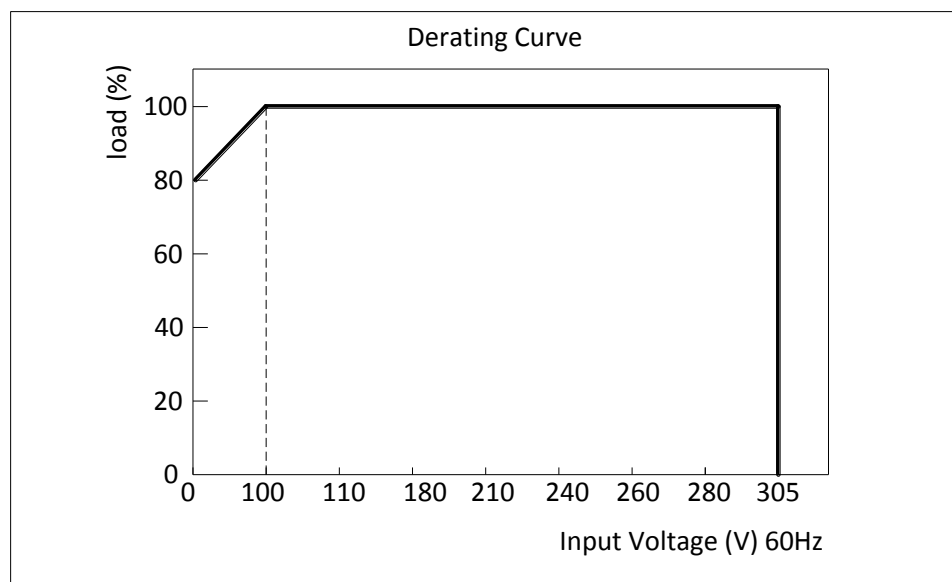


■ Power Factor Characteristic (DH150-024S625)

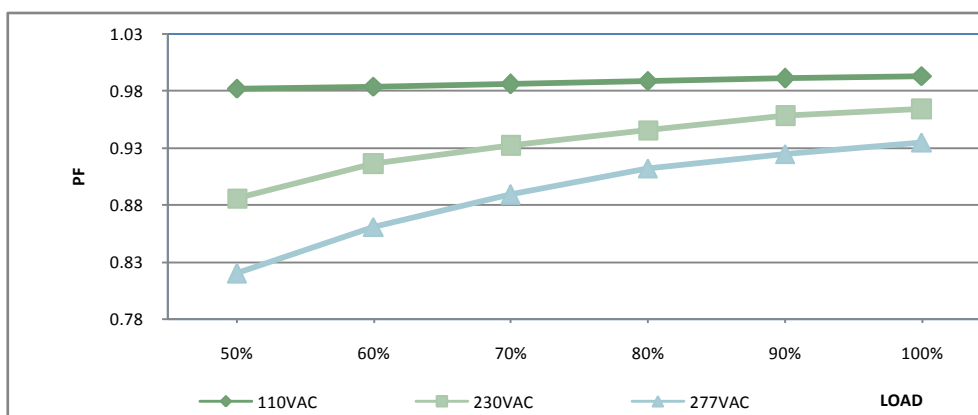


■ EFFICIENCY vs LOAD (DH150-024S625)

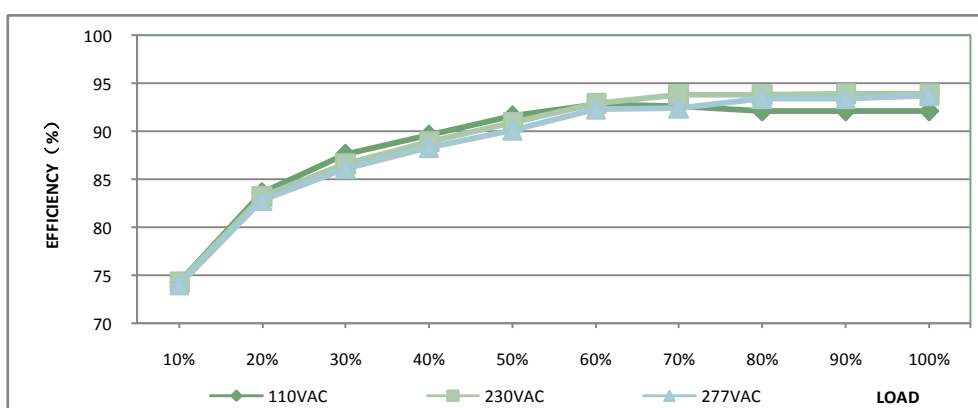

■ Typical LED power supply I-V curve

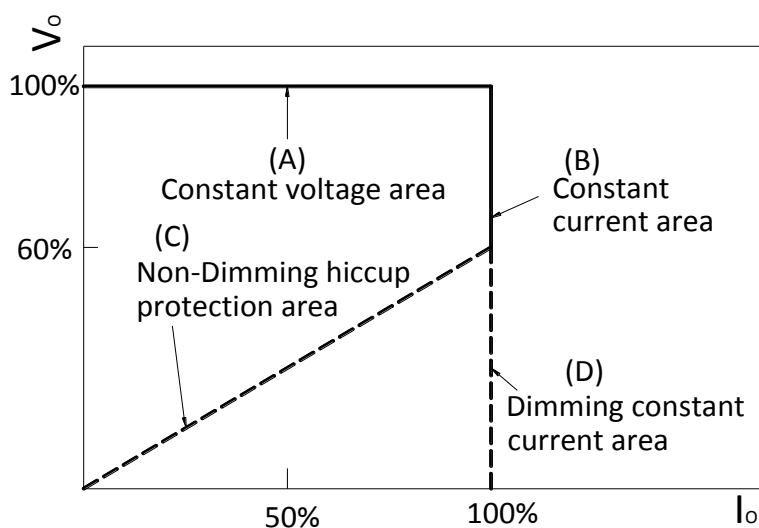

■ Mechanical Outline

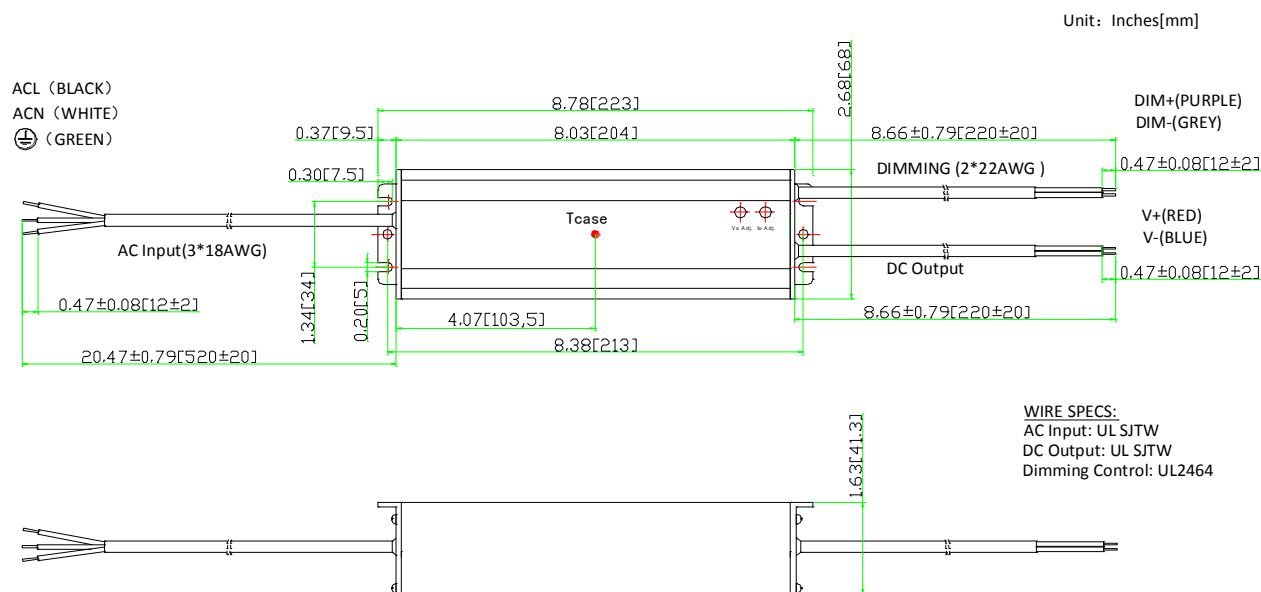

- ※ Tcase: Max. Case Temperature.
- ※ Power's internal temperature is 10°C warmer than case temperature.
- ※ No dimming control wire if without dimming function.
- ※ Please DO NOT connect "DIM -" to "V -" (load)

NO.	DC Output Current	Wire Number	Wire specification
1	≤5A	1	2×AWG18
2	5~12A(Including 12A)	1	2×AWG16
3	12~15A(Including 15A)	1	2×AWG14

■ "A" option

- Output voltage and current can be adjusted by internal potentiometer.
- IP65.
- These products shall be enclosed in the end product, when the unit provided with voltage and current adjustable holes.


■ "-TA" option: DALI dimming

- DALI Testing Software: Please refer to www.impowercorp.com for downloading.
- Percentage of rated current: 10%~100%.
- "TA" version LED driver shall work with a DALI Master and DALI Master control software.




■ “-TC” option: 0-10V, resistance & PWM dimming


a. Reference resistance value for output current adjustment (Typical)

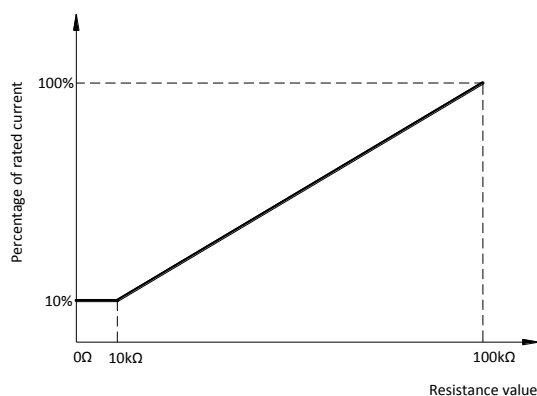

b. 0-10V dimming function for output current adjustment (Typical)

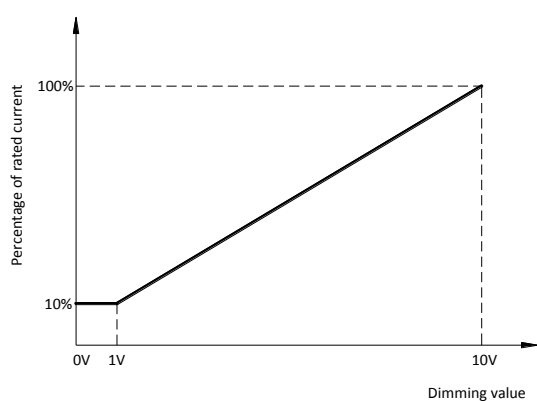

c. 10V PWM signal for output current adjustment (Typical): Frequency range: 200Hz~1.5KHz

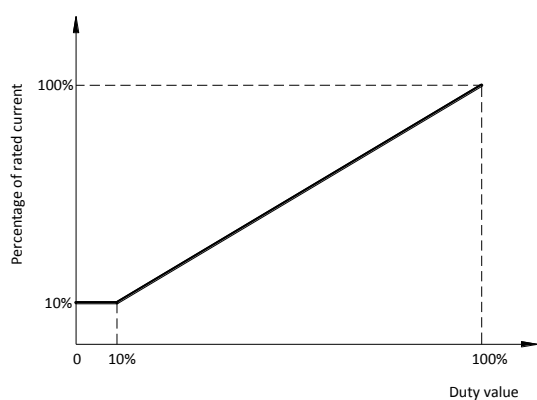

Dimming control details:

Parameters		Minimum	Typical	Maximum
Dimming Type	Resistance	0kΩ	0-100kΩ	∞
	Voltage	-2V	0-10V	15V
	PWM(10%~100% f=200Hz~1.5KHz)	-2V	0-10V	15V
Dimming Current		-0.5mA	-	0.5mA

■ "-TE" option: Customized timeshare dimming.

- Different output current (10% - 100% rate output current) can be set for different time periods.
- Maximum 4 sections is available. The minimum length is 0 to maximum 12 hours for each section.
- The parameter can't be changed after shipping.

■ "-TF" option: Programmable timeshare dimming.

- Output current is programmable with the range of 10%~100% of rated output current.
- Maximum 4 sections timeshare dimming is available. The minimum length is 0 to maximum 12 hours for each section.

For example:


The first section: the time period is 0~1h, the output current is 40% of rated output current.

The second section: the time period is 1h~4h, the output current is 100% of rated output current.

The third section: the time period is 4h~8h, the output current is 40% of rated output current.

The fourth section: the time period is 8h~12h, output current is 60% of rated output current.


- The parameters are set by a programmer.
- The data interface is waterproof.

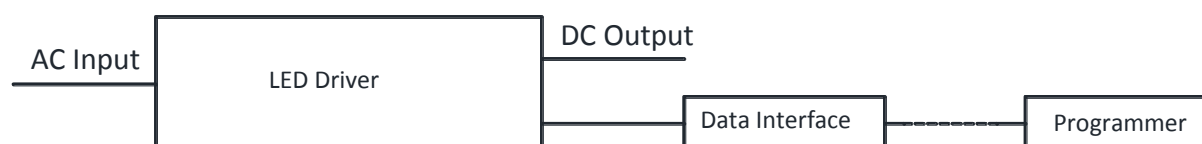

■ Input and output Dielectric strength

Isolation	Input Wires	Output Wires	Isolated Dimming Control Wires	Chassis
Input Wires	NA	3750	2000	1560/2000(remove discharge tube)
Output Wires	3750	NA	2000	2000
Isolated Dimming Control Wires	2000	2000	NA	2000
Chassis	1560/2000(remove discharge tube)	2000	2000	NA

■ Fixed derating-cutoff type temperature protection

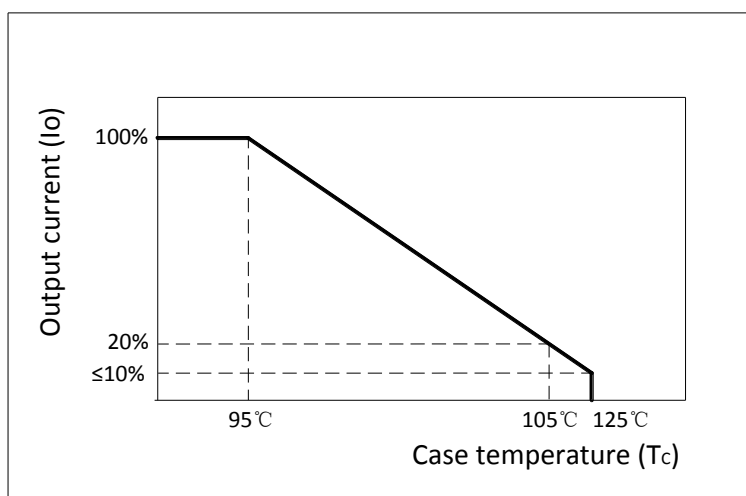

This datasheet is for reference only. Impow reserves all rights for final explanation of the technical materials.