



SPEC NO.: SRD-002L

SPECIFICATION

TO:STE921

Model Name: SAW Resonator

PART NO: SSR433N01D11-SMD

CUSTOMER PART NO.:

STRONG ELECTRONICS&TECHNOLOGY LIMITED

深圳市思硕电子科技有限公司

Service Hotline: 86 755-84528985 Fax: 86 755 84528986


Email:info@strongelectronics.net

www.strongelectronics.net

1. Package Dimension

(D11-SMD)

Unit: mm

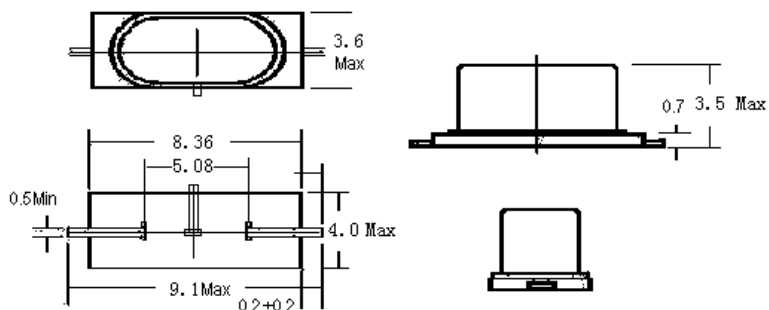


Pin No.	Function
Pin 1	Input/Output
Pin 2	Ground
Pin 3	Input/Output

2. Marking

R433M

1. Black Ink Marking
2. R: Product Code
3. M: One-port SAW Resonator
4. 433.92: Center Frequency

3. Equivalent LC Model

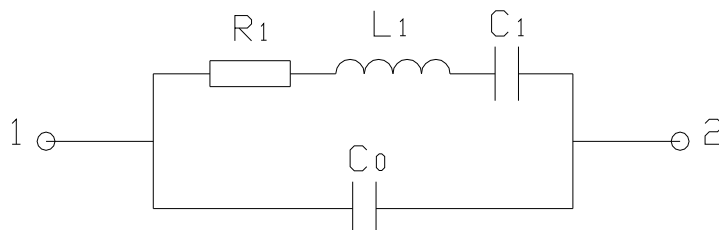

4. Performance


4.1 Maximum Rating

Item	Value
Operation Temperature Range	-40℃ to +80℃
Storage Temperature Range	-45℃ to +85℃
DC Voltage	10V
Source Power	0 dBm

4.2 Electronic Characteristics

Item	Units	Minimum	Typical	Maximum
Center Frequency (f_0)	MHz	433.845	433.92	433.995
Insertion Loss	dB	—	1.5	2.0
Quality Factor				
Unloaded Q	—	—	11,000	—
50Ω Loaded Q	—	—	2,000	—
Temperature Stability				
Turnover Temperature	℃	—	25	—
Freq. Temp. Coefficient	ppm/℃	—	0.032	—
Frequency Aging	ppm/yr	—	<±10	—
DC Insulation Resistance	MΩ	1.0	—	—
RF Equivalent RLC Model				
Motional Resistance R_1	Ω	—	18	26
Motional Inductance L_1	μH	—	86	—
Motional Capacitance C_1	fF	—	1.56	—
Shunt Static Capacitance C_0	pF	1.7	2.0	2.3

4.3 Test Circuit

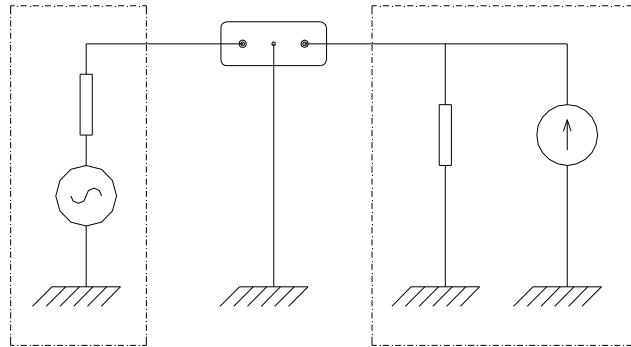

Note: Reference temperature shall be $25 \pm 2^{\circ}\text{C}$. However, the measurement may be carried out at 5°C to 35°C unless there is a dispute.

6. Remarks

6.1 Static voltage

Static voltage between signal load & ground may cause deterioration & destruction of the component. Please avoid static voltage.

6.2 Ultrasonic cleaning

Ultrasonic vibration may cause deterioration & destruction of the component. Please avoid ultrasonic cleaning.

6.3 Soldering

Only leads of component may be soldered. Please avoid soldering another part of component.

© Copyright 2006 STRONG, All Rights Reserved