



22.5×12.5×19

NG4U

R2133923 US E160644

Features

- Can be welded directly onto PCB.
- Used in household appliances like air conditioning , heater and instruments etc.

Ordering Information

NG4U C S 10 DC12V
1 2 3 4 5

1 Part number: NG4U
2 Contact arrangement: A:1A; C:1C
3 Enclosure: S:Sealed type; Z:Dust cover
4 Contact current: 5A,10A
5 Coil rated voltage(V): DC:6,12,24

Contact Data

Contact Arrangement		1A(SPSTNO) 1C (SPDT(B-M))	
Contact Material		AgCdO AgSnO ₂	
Contact Rating (resistive)		5A,10A/125VAC,28VDC 5A/250VAC	
Max. Switching Power		280W 1250VA	
Max. Switching Voltage		30VDC 220VAC	Max. Switching Current:10A
Contact Resistance or Voltage drop		≤50mΩ	Item 4.12 of IEC 61810-7
Operational life	Electrical	10 ⁵	Item 4.30 of IEC 61810-7
	Mechanical	10 ⁷	Item 4.31 of IEC 61810-7

Coil Parameter

Dash numbers	Coil voltage VDC		Coil resistance Ω ±10%	Pickup voltage VDC(max) (75% of rated voltage)	Release voltage VDC(min) (10% of rated voltage)	Coil power consumption W	Operate Time ms	Release Time ms
	Rated	Max.						
006-360	6	7.8	100	4.2	0.6	0.36	≤10	≤5
012-360	12	15.6	400	8.4	1.2			
024-360	24	31.2	1600	16.8	2.4			

CAUTION: 1.The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.
2.Pickup and release voltage are for test purposes only and are not to be used as design criteria.

Operation condition


Insulation Resistance	250MΩ min (at 500VDC)	Item 7 of IEC 60255-5
Dielectric Strength	50Hz 750V	Item 6 of IEC 60255-5
Between contacts	50Hz 2000V surge voltage 4kV	Item 6 and item 8 of IEC 60255-5
Shock resistance	100m/s ² 11ms	IEC68-2-27 Test Ea
Vibration resistance	10~55Hz double amplitude 1.5mm	IEC68-2-6 Test Fc
Terminals strength	5N	IEC68-2-21 Test Ua1
Solderability	235℃ ± 2℃ 3 ± 0.5s	IEC68-2-20 Test Ta method 1
Ambient Temperature	-25~70℃	
Relative Humidity	85% (at 40℃)	IEC68-2-3 Test Ca
Mass	8.6g	

Safety approvals


Safety approval	UL& C UR	TUV
Load	10A/125VAC 5A/250VAC	5A/250VAC;28VDC

Dimensions


mm /inch

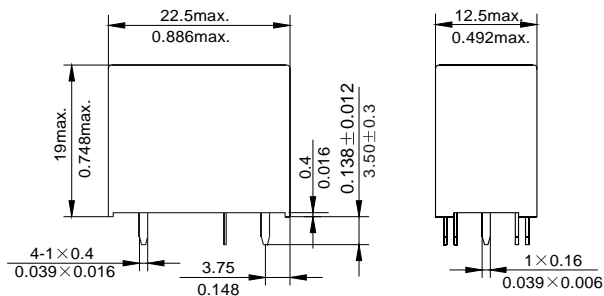

Dimensions



Mounting (Bottom view)

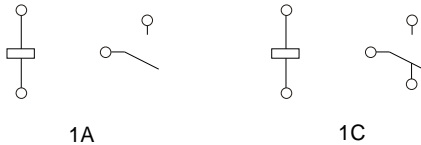

Wiring diagram
(Bottom view)

NOTES 1).Dimensions are in millimeters.
2).Inch equivalents are given for general information only.