



ME3-CL2

Electrochemical sensor

Manual

(Model: ME3-CL2)

Zhengzhou Winsen Electronics Technology Co., Ltd

ME3-CL2 gas sensor

ME3-CL2 electrochemical sensor detect gas concentration by measuring current based on the electrochemical principle, which utilizes the electrochemical oxidation process of target gas on the working electrode inside the electrolytic cell, the current produced in electrochemical reaction of the target gas are in direct proportion with its concentration while following Faraday law, then concentration of the gas could be get by measuring value of current.

1.Features

- * Low consumption
- * High precision
- * High sensitivity
- * Wide linear range
- * Good anti-interference ability
- * Excellent repeatability and stability




2 Application

Widely used in industrial and environmental fields

3. Technical Parameter


| | |
|-----------------------------|----------------------------------|
| Detection gas | CL2 |
| Measurement Range | 0~10ppm |
| Max detecting concentration | 100ppm |
| Sensitivity | $(0.6 \pm 0.15) \mu\text{A/ppm}$ |
| Resolution ratio | 0.1ppm |
| Response time (T_{90}) | <60S |
| Bias voltage | 0mV |
| Load resistance (recommend) | 10 Ω |
| Repeatability | <2% output value |
| Stability (/ month) | <2% |
| Output Linearity | linear |
| Zero drift (-20°C~40°C) | $\leq 0.2\text{ppm}$ |
| Storage temperature | -20°C~50°C |
| Storage Humidity | 15%~90% RH |
| Pressure range | Standard atmosphere $\pm 10\%$ |
| Anticipated using life | 2 years |

4. External dimension

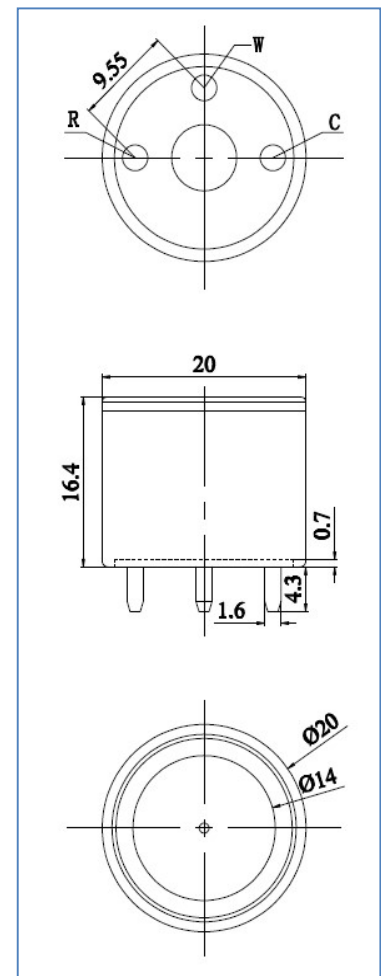


5.Characterization


Features of sensitivity, response and recovery time

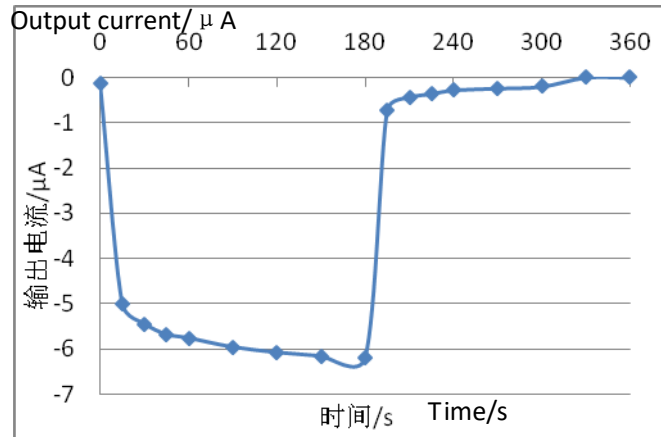


Data graph of concentration linearity features

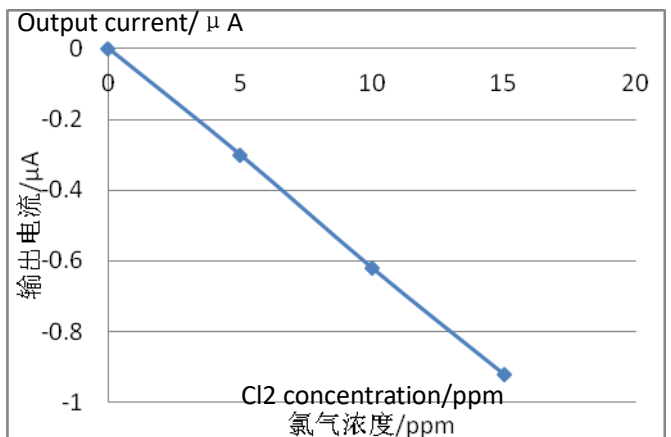


Zero output upon variable temperature

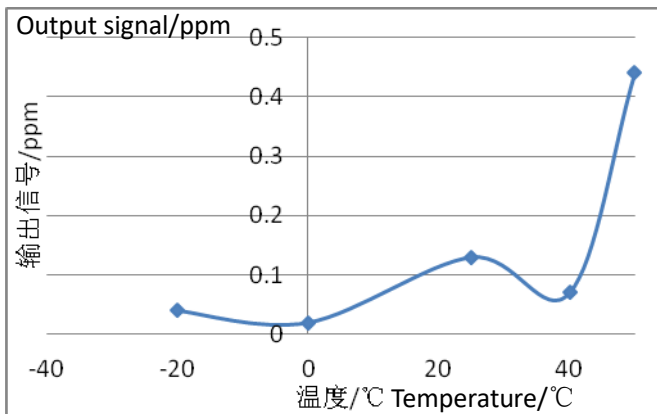


Sensitivity upon variable temperature

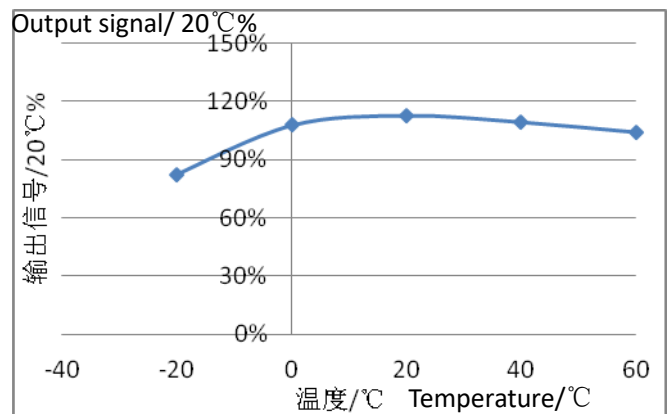

6.Basic circuit

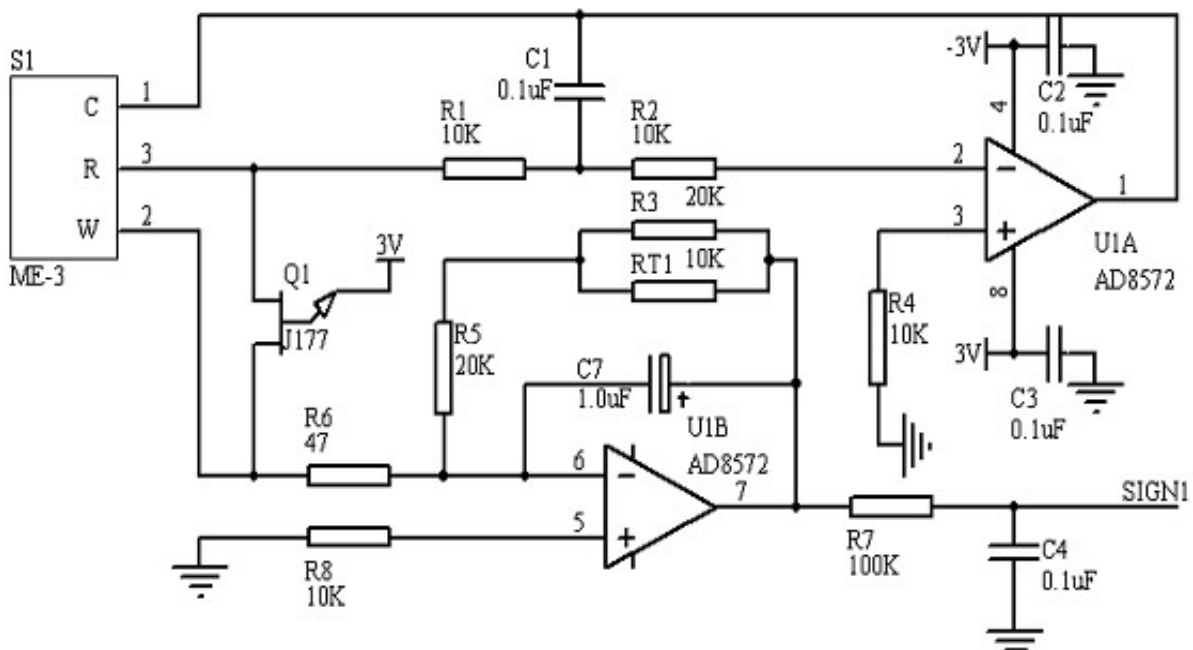

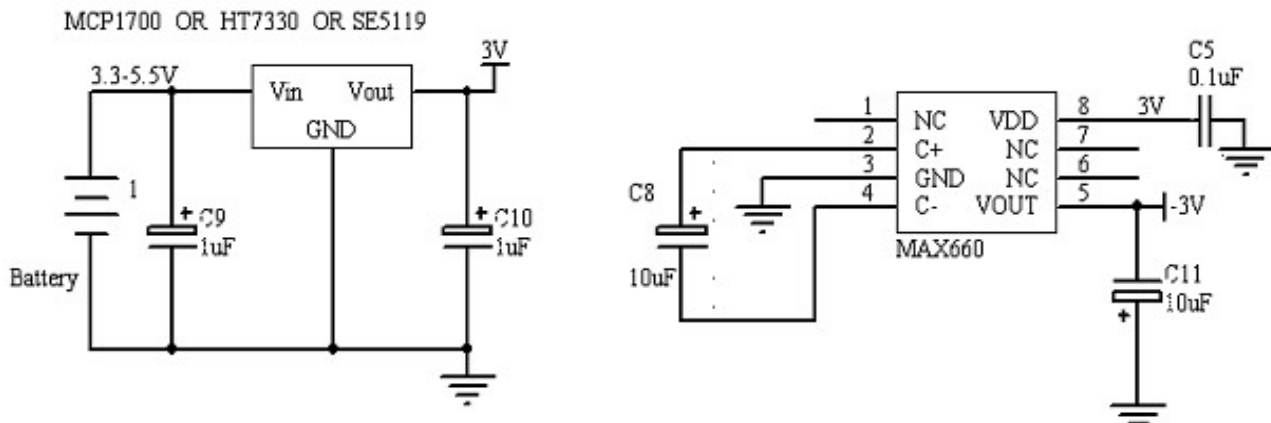

7. Anti-Interference:

ME3-CL2 sensor also responds to other gases besides target gas. Below are the response characteristics of interferential gases

| Gas | Concentration | ME3-CL ₂ |
|-------------------------------|---------------|---------------------|
| H ₂ S | 15ppm | <-3ppm |
| CO | 200ppm | 0ppm |
| NO | 35ppm | 0ppm |
| SO ₂ | 5ppm | 0ppm |
| HCN | 10ppm | 0ppm |
| H ₂ | 400ppm | 0.1ppm |
| C ₂ H ₄ | 400ppm | 0.1ppm |
| HCL | 5ppm | 0ppm |
| CO ₂ | 5% | 0 |
| NH ₃ | 20ppm | 0.1ppm |

8. Application Notes:

- Tin soldering is prohibited.
- Before using, power on to aging for more than 48 hours is necessary.
- Pins can't be broke off or bent.
- Don't disassemble the sensor to avoid the damage caused by electrolyte leakage.
- Avoid contacting organic solvent (including Silicone rubber and other adhesive), coatings, medicine, oil and high concentration gases.

-
- All the electrochemical sensors shall not be encapsulated completely by resin materials, and shall not immerse in pure oxygen environment, otherwise, it will damage the function of sensor
 - All electrochemical sensors shall not be applied in corrosive gas environment, or the sensor will be damaged
 - Zero calibration should be finished in clean air.
 - During test and usage, sensors should avoid the gas inflow vertically
 - The side for inflow can't be choked and polluted.
 - The laminating film above the sensor surface can't be uncovered and damage.
 - Excessive impact or vibration should be avoided
 - It takes some time for the sensor to return to normal state after it is applied in high concentration gas
 - Working electrode and reference electrode of the sensor shall be in short circuit when stored
 - Prohibit to use the hot cement or sealant of which the curing temperature is higher than 80℃ to make the capsulation for the sensor.
 - Prohibit storage and usage for long time in alkaline gases with high concentration.
 - Do not use the sensor when the shell is damaged

Note: To keep continual product development, we reserve right to change design features without prior notice !

Zhengzhou Winsen Electronics Technology Co., Ltd

Add: No.299, Jinsuo Road, National Hi-Tech Zone,
Zhengzhou 450001 China

E-mail: sales@winsentech.com

Website: www.winsentech.com