

## Photo DMOS-FET Relay

### Description

The LT411 is a 1-Form A solid state relay in an 4 pin DIP package that employs optically coupled MOSFET technology to provide 3750V/5000V of input to output isolation. The optically coupled input is controlled by a highly efficient GaAlAs infrared LED and MOS FETs on the output side.


### Features

- Low driver power requirements (TTL/CMOS Compatible)
- No moving parts
- High reliability
- Arc-Free with no snubbing circuits
- 3750/5000Vrms Input/Output isolation

### Applications

- Telecommunications (PC, Electronic notepad)
- Measuring and Testing equipment
- Industrial control
- Security equipments
- High speed inspection machine

### Outline Dimensions

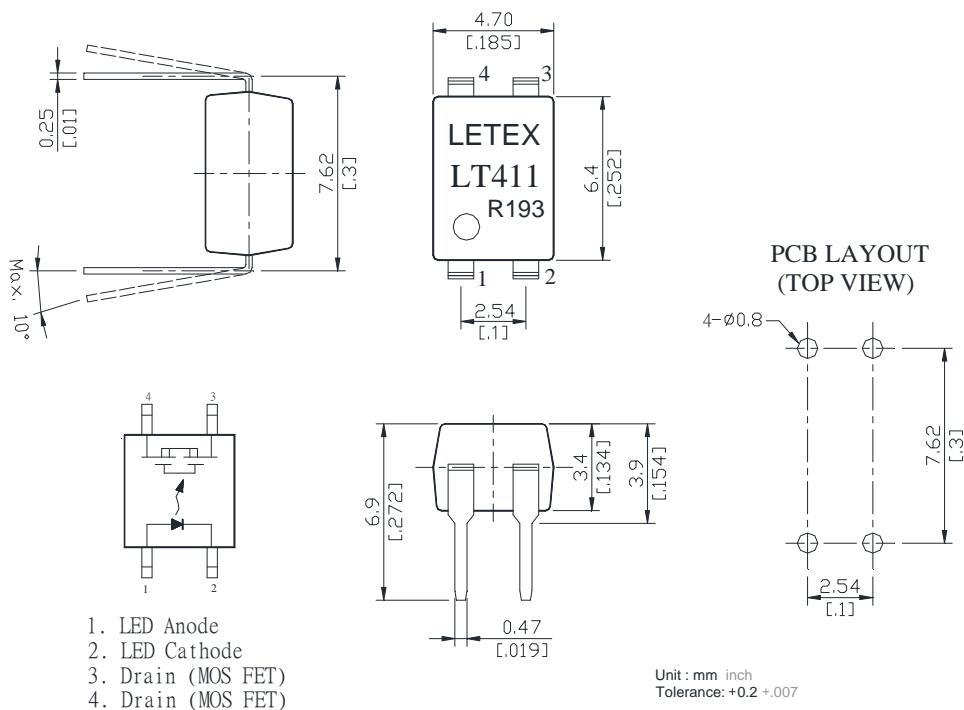

## Photo DMOS-FET Relay Specifications

### Part Name: LT411

(Load voltage: 350V / Load current: 130mA)

#### Absolute Maximum Ratings (Ambient Temperature: 25°C)

| Item                            |                          | Symbol            | Value       | Units            | Note            |
|---------------------------------|--------------------------|-------------------|-------------|------------------|-----------------|
| Input                           | Continuous LED Current   | I <sub>F</sub>    | 50          | mA               |                 |
|                                 | Peak LED Current         | I <sub>FP</sub>   | 1000        | mA               | f=100Hz, uty=1% |
|                                 | LED Reverse Voltage      | V <sub>R</sub>    | 5           | V                |                 |
|                                 | Input Power Dissipation  | P <sub>In</sub>   | 75          | mW               |                 |
| Output                          | Load Voltage             | V <sub>L</sub>    | 350         | V(AC peak or DC) |                 |
|                                 | Load Current             | I <sub>L</sub>    | 130         | mA               |                 |
|                                 | Peak Load Current        | I <sub>Peak</sub> | 0.6         | A                | 100ms(1 pulse)  |
|                                 | Output Power Dissipation | P <sub>out</sub>  | 300         | mW               |                 |
| Total Power Dissipation         |                          | P <sub>T</sub>    | 350         | mW               |                 |
| I/O Breakdown Voltage           |                          | V <sub>I/O</sub>  | 3750        | Vrms             | RH=60%, 1min    |
| I/O Breakdown Voltage(Suffix-V) |                          | V <sub>I/O</sub>  | 5000        | Vrms             | RH=60%, 1min    |
| Operating Temperature           |                          | T <sub>Op</sub>   | -40 to +85  | °C               |                 |
| Storage Temperature             |                          | T <sub>Stg</sub>  | -40 to +100 | °C               |                 |
| Pin Soldering Temperature       |                          | T <sub>Sol</sub>  | 260         | °C               | 10 sec max.     |

#### Electrical Specifications (Ambient Temperature: 25°C)

| Item         |                           | Symbol             | MIN.             | TYP. | MAX. | Units | Conditions   |
|--------------|---------------------------|--------------------|------------------|------|------|-------|--|
| Input        | LED Forward Voltage       | V <sub>F</sub>     |                  | 1.2  | 1.5  | V     | I <sub>F</sub> =10mA   |
|              | Operation LED Current     | I <sub>F On</sub>  |                  | 0.5  | 5.0  | mA    |  |
|              | Recovery LED Current      | I <sub>F Off</sub> |                  | 0.35 | 0.5  | mA    |  |
|              | Recovery LED Voltage      | V <sub>F Off</sub> | 0.5              |      |      | V     |  |
| Output       | On-Resistance             | R <sub>On</sub>    |                  | 17   | 24   | Ω     | I <sub>F</sub> =10mA, I <sub>L</sub> =100mA,<br>Time to flow is<br>within 1 sec. |
|              | Off-State Leakage Current | I <sub>Leak</sub>  |                  |      | 1    | uA    | V <sub>L</sub> =Rating   |
|              | Output Capacitance        | C <sub>Out</sub>   |                  | 41   |      | pF    | V <sub>L</sub> =0, f=1MHz  |
| Transmission | Turn-On Time              | T <sub>On</sub>    |                  | 0.23 | 0.5  | ms    | I <sub>F</sub> =10mA, I <sub>L</sub> =100mA                                      |
|              | Turn-Off Time             | T <sub>Off</sub>   |                  | 0.05 | 0.2  | ms    |  |
| Coupled      | I/O Isolation Resistance  | R <sub>I/O</sub>   | 10 <sup>10</sup> |      |      | Ω     | DC500V   |
|              | I/O Capacitance           | C <sub>I/O</sub>   |                  | 0.8  | 1.5  | pF    | f=1MHz   |



## Reference Data

