
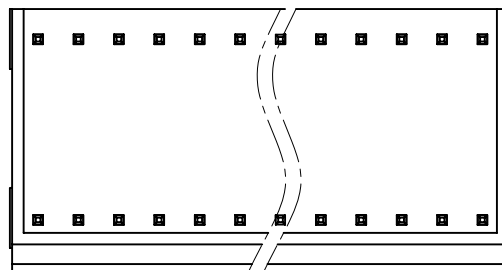
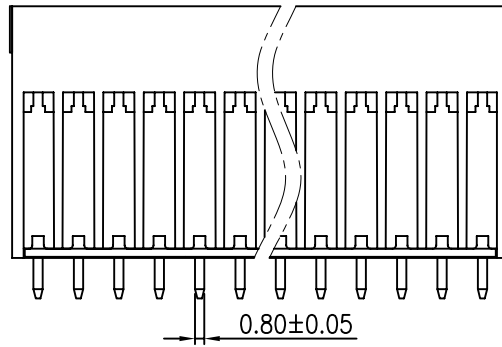


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		图面更新	C SX	08/15/06
△		增加UL, CE刻字	Zengy	09/05/08
△		增加VDE及参数刻字	LJH	02/10/09



Notes:

1. Pitch: 3.81mm, Poles: 4-48P
2. Rated voltage/current: UL 300V/8A
VDE 250V/7A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	○	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	□

3	15EDGV/RH-3.81-Cover	1064COYXXA (H)	1	PA66	UL94V-0
2	15EDGVH-Pin	1063B00030 (H)	XX	Brass	SnCe

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	15EDGV/RH-3.81-Housing	1064AOYXXA (H)	1	PA66	UL94V-0

MM (INCH)	DFTO	ExpsAny	DATE 02/21/06
TOLERANCES EXCEPT AS NOTED	CHKD		DATE
MM	MFO		DATE
.0 ±	APPL		DATE
.00 ±			
.000 ±			
ANGLES ± 1°	G. E :		
THIRD ANGLE PROJECTION	FINISH :		
	SCALE : 1:1		

宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
NAME 15EDGVH-3.81-XXP-1Y-00A (H)	
DRAWING NO. 15EDGVH-3.81-E01	SIZE A3
/PART NO.	REV T3 02/10/09
DO NOT SCALE DRAWING	SHEET 1 OF 1