


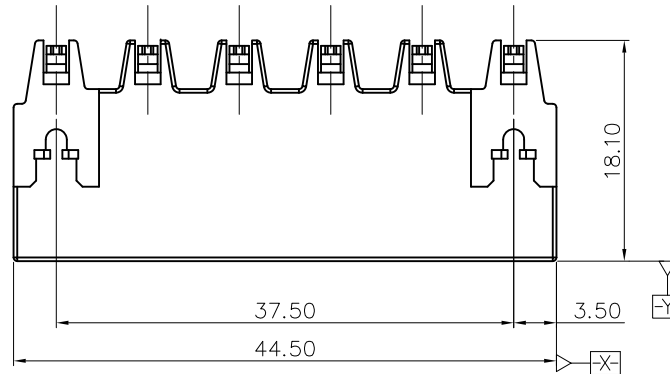
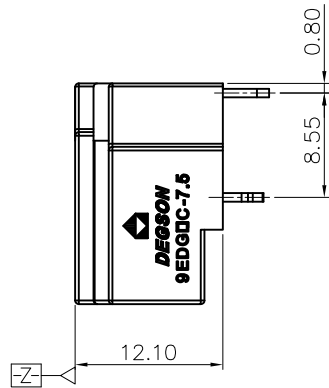


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

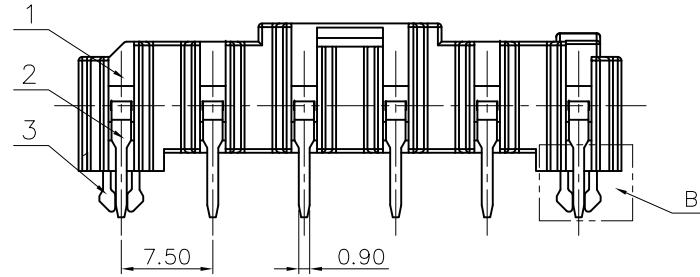

NOTES1:

UL Standard

- Rated voltage/current : 300V / 16A
- Withstanding voltage : AC1600V/1Min.
- Ratings: Use group B,C 300V AC/DC  
Use group D 600V AC/DC

IEC Standard



1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	6.0KV	6.0KV	6.0KV
Rate voltage(V)	1000V	630V	500V
Rate current(A)	20A		

NOTES2:

- Dimension shall be interpreted per ASME Y14.5-2009
- Pitch : 7.50mm, Poles : 06P
- Operating temperature: -40°C~+130°C
- Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm					
TO	Over	TO	Over	TO	Over	TO	
6	10	6	30	30	60	60	
10	24	10	60	60	100	100	
15		15	100	100	150	150	
						0.1/10	
						∠	
						±2'	

5.RoHS Compliance

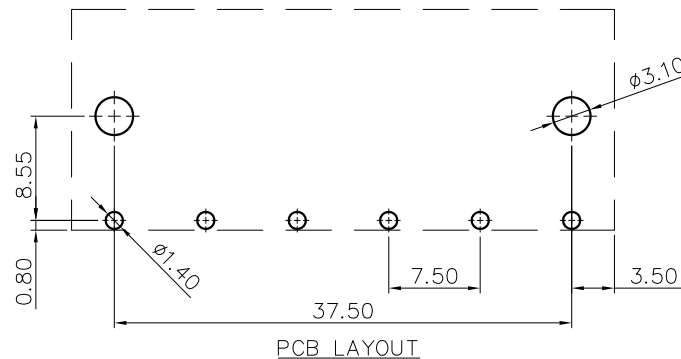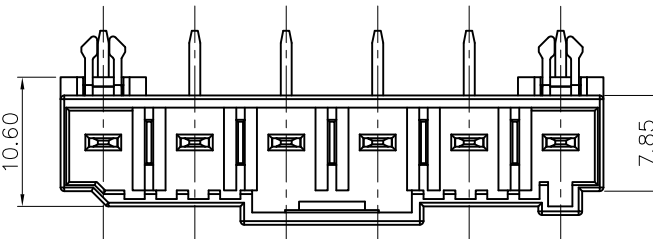

9EDGRC - 7.5 - XXP - 1Y - 200A (H)  
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color):3.(Black) 9.(White)  
 (RoHS)  
 200A-(Customer Request)

ITEM	NAME OF PART	MATERIAL	NOTES
3	Mount	Copper alloy	Sn Plated
2	Pin header	Copper alloy	Au Plated
1	Housing	LCP	UL94V-0

DETACHED LISTS	PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: 9EDGRC-7.5-06P-1Y-200A(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT: MEK 2017.07.28	REV	DO-1	
		DRAWING NO.:	9EDGRC-7.5-C03	SHEET
	MM (INCH)	DO NOT SCALE DRAWING	SCALE	1:1