
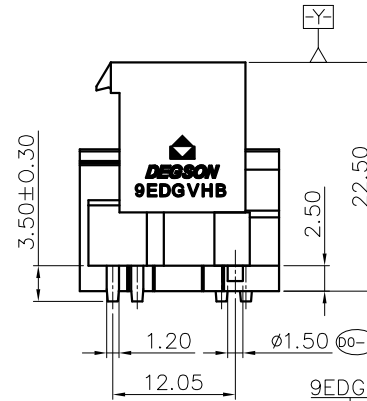
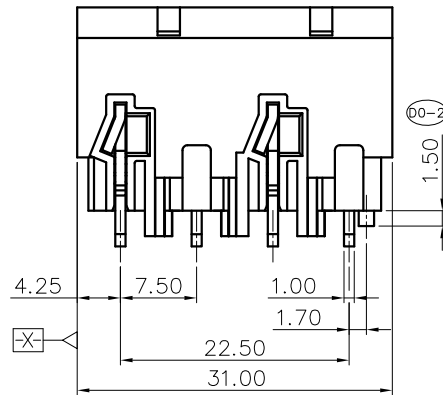
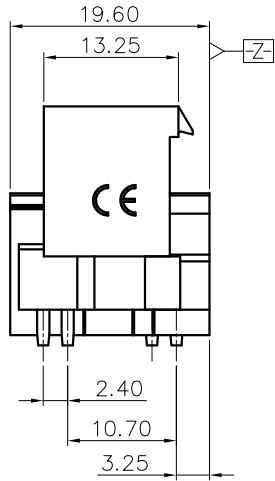


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
D0-2		modify structure	MEK	2017.04.25

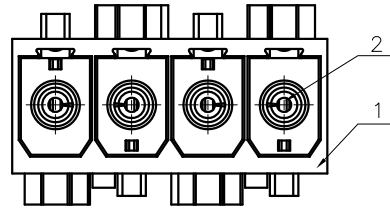

NOTES1:

UL Standard

- 1.Rated voltage/current : 600V / 35A
- 2.Withstanding voltage : AC2200V/1Min.


NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 7.50mm, Poles : N=04P
- 3.Operating temperature: -40°C~+105°C
- 4.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm				Tolerances	
TO	Over	TO	Over	TO	Over	TO	Over
6	10	10	24	30	60	100	150
±0.15	±0.20	±0.30	±0.30	±0.30	±0.50	±0.70	±1.00
							±1.30
							±2'

5.RoHS Compliance


9EDGVHB - 7.5 - 04P - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color) :1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

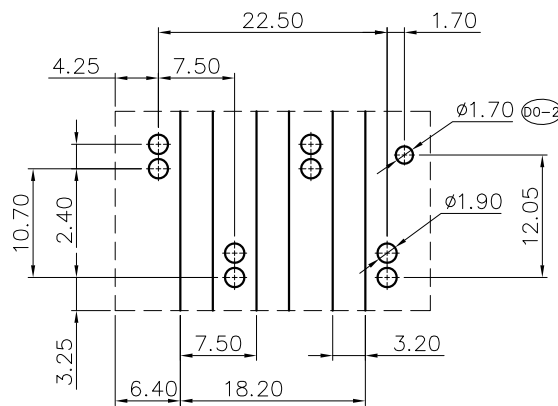

PCB LAYOUT

ITEM	NAME OF PART	MATERIAL	NOTES
2	Pin	Copper	Sn Plated
1	Housing	PA66	UL94V-0

DETACHED LISTS	PART NO.:	/			
	APPD:	NAME: 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	CHKD:	9EDGVHB-7.5-04P-1Y-00A(H)			
	DRFT: MEK 2017.04.20	TITLE: CUSTOMER DRAWING	REV	D0-2	
		DRAWING NO.: 9EDGVHB-7.5-C01	SHEET	1/1	
		MM (INCH)	DO NOT SCALE DRAWING	SCALE	1:1



THIRD ANGLE PROJECTION