
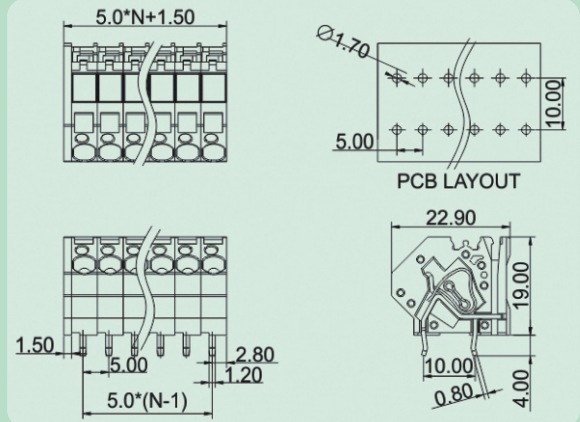


DG262-5.0/DG046-5.0

- PCB免螺丝接线端子，笼式弹簧设计。
- 45°接线。
- 带测试孔。
- 带桥接功能。
- 最大线径4 mm²。

- PCB Screwless terminal block, Spring-cage design, fast connection.
- 45° wiring available.
- With testing holes available.
- Bridge function.
- Max wire range:4 mm².

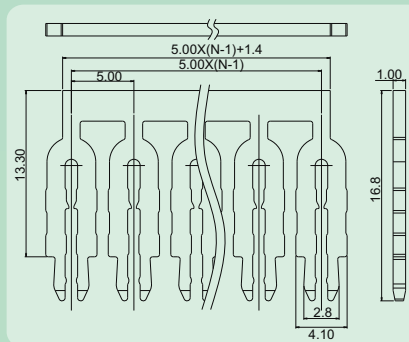

技术参数 Technical data

APPROVAL: CE

型号 Model	线径 Wire range (AWG/mm ²)	线数 Poles	IEC60947技术参数 (IEC60947 data sheet)		UL1059技术参数 (UL1059 data sheet)	
			电压(V) Rated voltage	电流(A) Rated current	电压(V) Rated voltage	电流(A) Rated current
DG262-5.0	28-12/0.2-4	01P-XXP	320	32	300	20
DG046-5.0	-	-	-	20	-	20

应用行业 Application

工业自动化，新能源，电梯，电力电气，仪器仪表等行业。
industrial automation, new energy, elevator, electric power, instrument..



产品包装方式 Packing

Product model	Pcs./Pkt.	Product model	Pcs./Pkt.
DG262-5.0-01P	50	DG046-5.0	250
DG262-5.0-02P	50	DG046-5.0	250
DG262-5.0-03P	50	DG046-5.0	250
DG262-5.0-04P	50	DG046-5.0	250
DG262-5.0-05P	50	DG046-5.0	250
DG262-5.0-06P	50	DG046-5.0	250

型号对照 Cross reference

DEGSON	同行1/Competitor1	同行2/Competitor2
DG262-5.0	745-1XX	-
DG046	745-8XX	-

产品订货 How to order

