



REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		Drawing Revise	Haoyh	03/30/06
△		增加VDE刻字	CSX	01/12/07
△		UL标志中去掉小R	CSX	08/09/07
△		修改出脚尺寸5.1为5.4	LJH	04/25/09

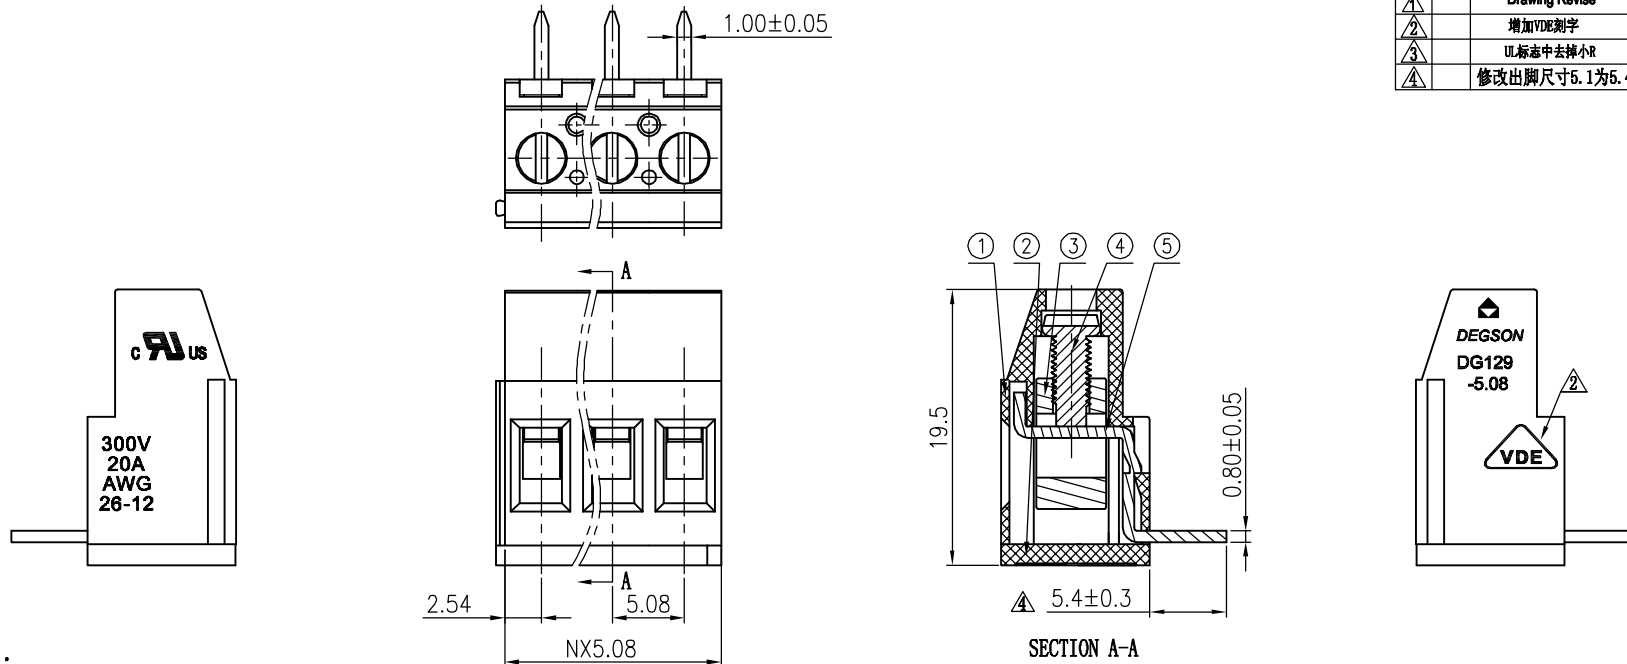

Notes:

1. Pitch:5.08mm , Poles:2-XXP
2. Rated voltage/current:UL 300V/20A
VDE 250V/20A
3. Operation temperatures:-40°C~+105°C
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ /DC1000V
6. Wire Range:26~12AWG, 0.5-2.5mm²
7. Max. Torque Value:M3, 5.1kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
to	over	to	to	over	over	over	over	
6	10	24	30	60	100	150		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

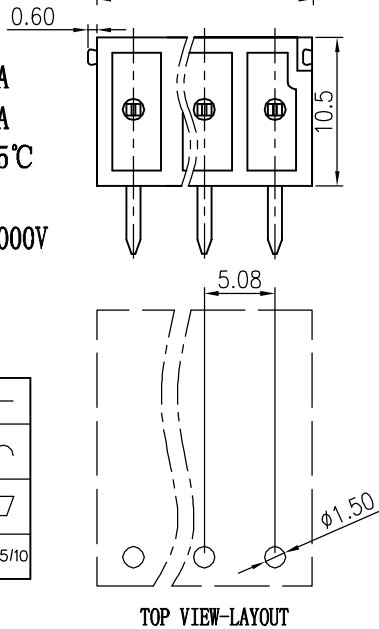

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
5	DG129R-Pin header	4034B00010 (H)	XX	Barss	SnCe
4	DG129-Screws-M3	S000001430 (H)	XX	Steel	Cr ³⁺ Zn
3	DG129-Contact	X000000200 (H)	XX	Brass	Ni plated
2	DG129-5.08 Cover	4042C0YXXA (H)	1	PA66	UL94V-0
1	DG129R-5.08 Housing	4066A0YXXA (H)	1	PA66	UL94V-0

DETACHED LISTS		DFTD ZHUJW		DATE 07/14/'04	
TOLERANCES EXCEPT AS NOTED		CHKD	DATE		
		MFD	DATE		
		APPVL	DATE		
		MATERIAL :			
ANGLES ± 1°		G.E :			
THIRD ANGLE PROJECTION		FINISH:			
		SCALE : 1:1			
		DO NOT SCALE DRAWING		SHEET 1 OF 1	

DEGSON[®] 宁波高正电子有限公司
DEGSON ELECTRONICS CO., LTD

NAME
DG129R-5.08-XXP-1Y-00A(H)

DRAWING NO. DG129R-5.08-E02 SIZE A3 REV T4 04/25/09
/PART NO.