






**DG21-A**




"S" = 11.0x(P/2-1)  
 "L" = 11.0x(P/2-1)+14.00






<b>Approval</b>	CE	
<b>Electrical</b>	<b>UL</b>	<b>IEC</b>
Standard	300V	250V
Rated voltage	30A	32A
Rated current	18-10AWG	4.0mm <sup>2</sup>
Wire range	AC2000V/1Min	
With standing voltage	1000MΩ /DC500V	
Insulation Resistance		
<b>Mechanical</b>		
Max. Torque Value	1.2N.m 10.6Lb.in	
Ambient temperature	-40℃~+80℃	
<b>Dimensions</b>		
Pitch	11.0mm(.433")	
Poles	4P	
<b>Material</b>		
Housing	PC,UL94V-2	
Terminal	Brass, Tin-Plated	
Screws	Steel,M4 Ni-Plated	

### HOW TO ORDER :

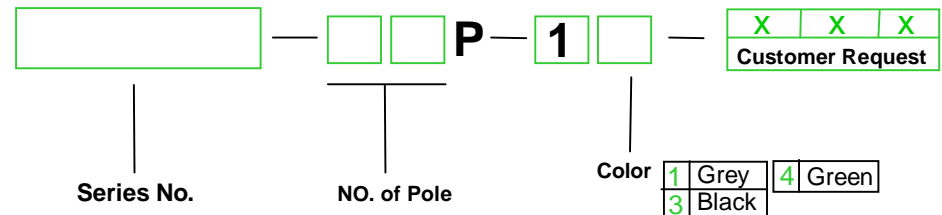

极数	4	6	8	10	12	14	16	18	20	22	24		
L(mm)	47.00	69.00	91.00	113.00	135.00	157.00	179.00	201.00	223.00	245.00	267.00		
S(mm)	33.00	55.00	77.00	99.00	121.00	143.00	165.00	187.00	209.00	231.00	253.00		

	 <b>DEGSON ELECTRONICS CO., LTD.</b>
	<b>NAME</b> <span style="float: right;"><b>DG21-A</b></span>