
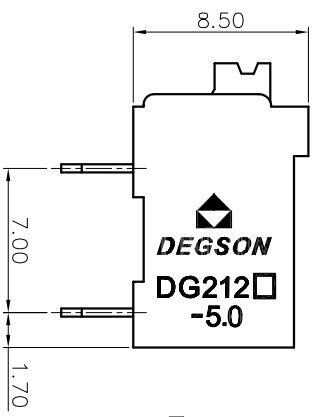
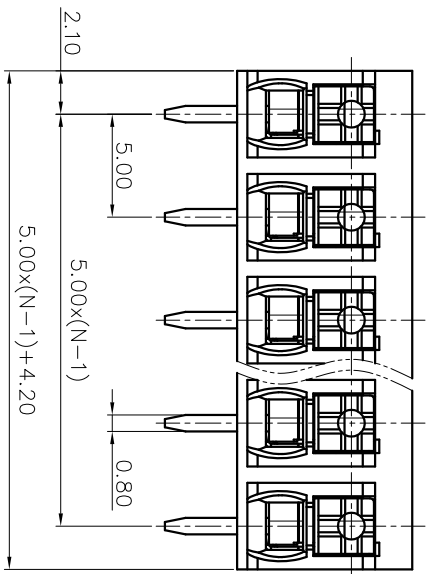
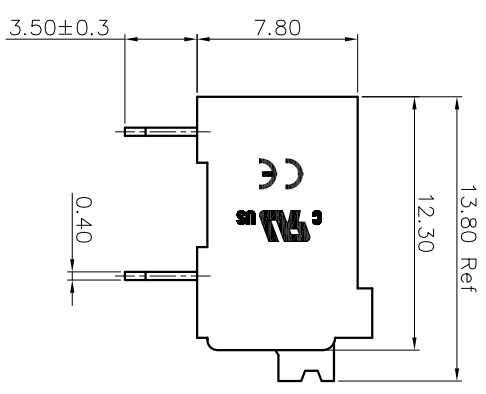


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

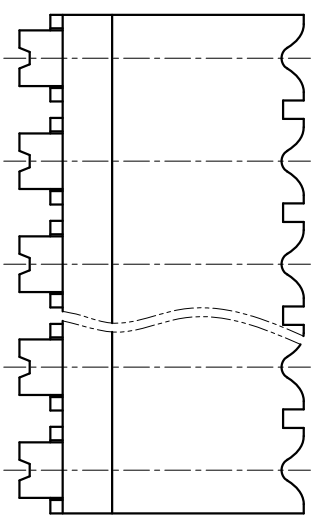

Pollution Degree	2	2	3
Overvoltage Category	II	III	III
Rate Impulse Voltage(kV)	4.0KV	4.0KV	4.0KV
Rate Voltage(V)	500V	320V	250V
Rate Current(A)	17.5A		

NOTES1:



- 1. Rated voltage/current : 300V / 12A
  - 2. Withstanding voltage : AC1600V/1Min.
  - 3. Wire range : 28~14AWG
- IEC Standard

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 5.00mm, Poles : N=02~24P
- 3. Stripping length : 8~9mm
- 4. Operating temperature: -40°C~+130°C
- 5. Undimensioned tolerances:

Pitch	range	in	Nominal dimension	range	mm	in	mm	mm	mm	
6	Over	10	Over	30	Over	60	Over	100	Over	150
To	10	To	10	To	100	To	150			
10	To	24	30	60	100	150				

6. RoHS Compliance

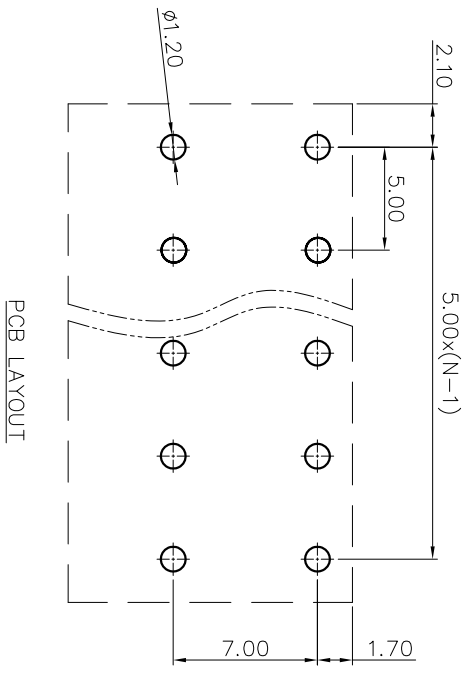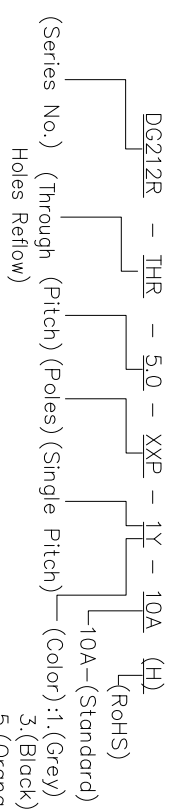

DETACHED LISTS		THIRD ANGLE PROJECTION	
PART NO.:	/		
APPD:	/		
CHKD:	/		
DRFT:	/		
NAME:	NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司		
TITLE:	CUSTOMER DRAWING		
DRAWING NO.:	/		
REV	DO	SHEET	SCALE
		1/1	1:1