




DEGSON ELECTRONICS CO., LTD.



Product Specification



DG22-A

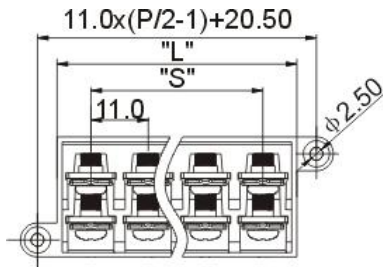


$"S" = 11.0 \times (P/2 - 1)$
 $"L" = 11.0 \times (P/2 - 1) + 14.00$

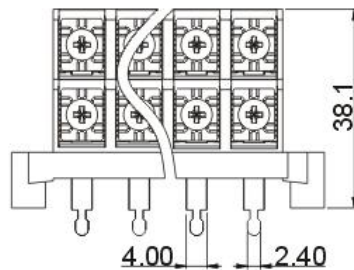

Approval	CE	
Electrical	UL	IEC
Standard	300V	250V
Rated voltage	30A	41A
Rated current	18-10AWG	6.0mm ²
Wire range	AC2000V/1Min	
With standing voltage	1000M Ω /DC500V	
Insulation Resistance		
Mechanical		
Max. Torque Value	1.2N.m 10.6Lb.in	
Ambient temperature	-40 $^{\circ}$ C ~ +80 $^{\circ}$ C	
Dimensions		
Pitch	11.0mm (.433")	
Poles	4P, 6P, 8P	
Material		
Housing	PC, UL94V-2	
Terminal	Brass, 1.2t, Gold-Plated	
Screws	Steel, M4 Gold-Plated	

HOW TO ORDER :

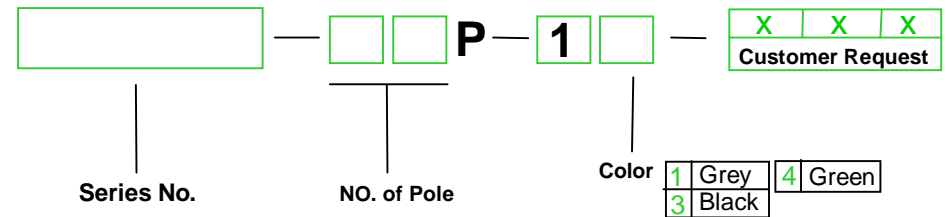

Poles	4	6	8	10	12	14	16	18	20	22	24		
L(mm)	47.00	69.00	91.00	113.00	135.00	157.00	179.00	201.00	223.00	245.00	267.00		
S(mm)	33.00	55.00	77.00	99.00	121.00	143.00	165.00	187.00	209.00	231.00	253.00		

\longleftrightarrow mm (INCH)	 DEGSON ELECTRONICS CO., LTD.
 THROANGLE PROJECTION	NAME DG22-A