


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		图面更新	HW	04/11/06*
△		工程变更:去掉电压、电流符号	WLM	08/13/08*

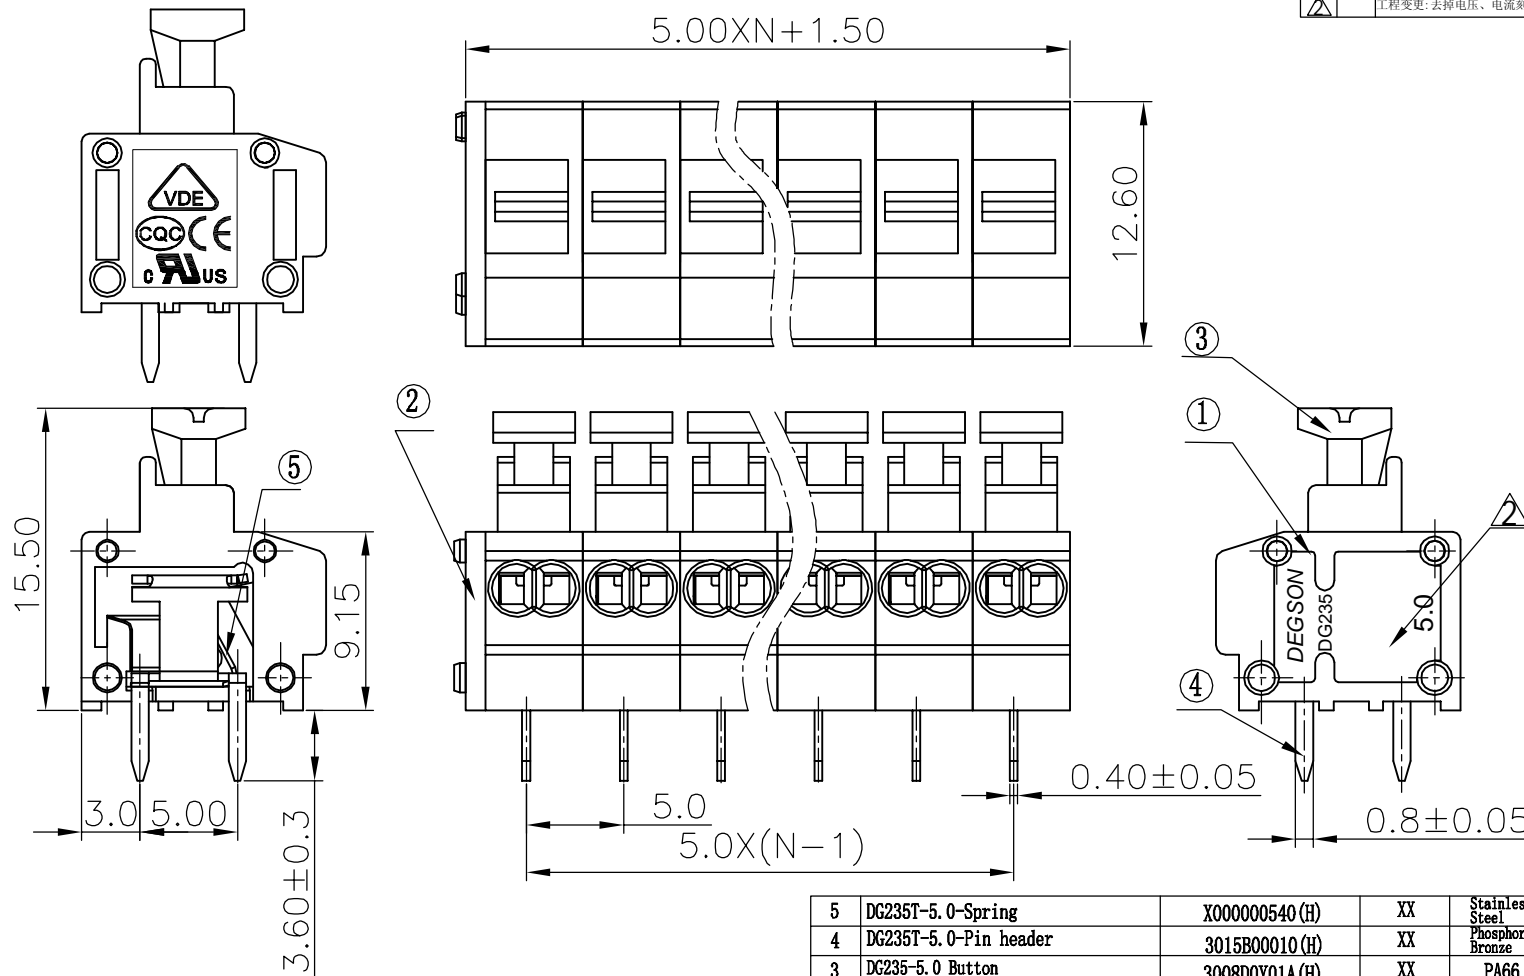

Notes:

1. Pitch: 5.0mm, Poles: XXP
2. Rated voltage/current: UL 300V/5A  
VDE 250V/10A
3. Operation temperatures:  $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance:  $5000\text{M}\Omega/\text{DC}1000\text{V}$
6. Wire Range: 20~18AWG, 1.5mm<sup>2</sup>
7. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm							
	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150			
	±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	

5	DG235T-5.0-Spring	X00000540 (H)	XX	Stainless Steel	
4	DG235T-5.0-Pin header	3015B00010 (H)	XX	Phosphor Bronze	SnCe plated
3	DG235-5.0 Button	3008D0Y01A (H)	XX	PA66	UL94V-0
2	DG235-5.0 Cover	3008C0Y01A (H)	1	PA66	UL94V-0
1	DG235T-5.0 Housing	3015A0Y01A (H)	XX	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

DETACHED LISTS	MM (INCH)	DFTO Haoyh	DATE 08/01/05*
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE
		INFO	DATE
		APPVL	DATE
MM		MATERIAL :	NAME
.0 ±	±		DG235T-5.0-XXP-1Y-00A(H)
.00 ±	±		DRAWING NO. DG235T-5.0-E02
.000 ±	±		/PART NO.
ANGLES ± 1°	G.E :		SIZE A3
THIRD ANGLE PROJECTION	FINISH :		REV T2
	SCALE : 1:1	DO NOT SCALE DRAWING	08/13/08*
		SHEET 1	OF 1