




DEGSON ELECTRONICS CO., LTD.


Product Specification



Approval	c	
Electrical	UL	IEC
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	24A
Wire range	22-14AWG	2.5mm ²
With standing voltage	AC2500V/1Min	
Insulation Resistance	500MΩ/DC500V	
Mechanical		
Max. Torque Value	0.5N.m 4.4Lb.in	
Ambient temperature	-40°C ~ +105°C	
Dimensions		
Pitch	7.62mm (.300")	
Poles	2*(4P-24P)	
Material		
Housing	PA66+23%GF, UL94V-0	
Terminal	Brass, 0.8t Tin plated	
Screws	Steel, M3 Ni plated	

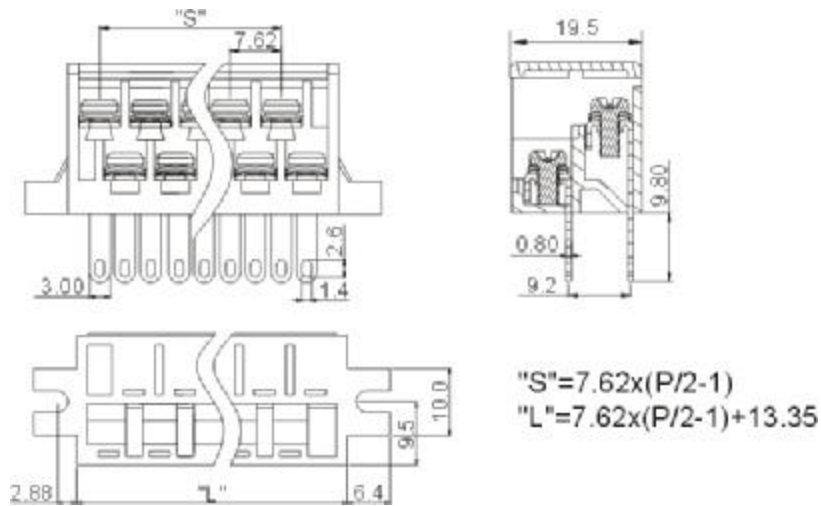

HOW TO ORDER :

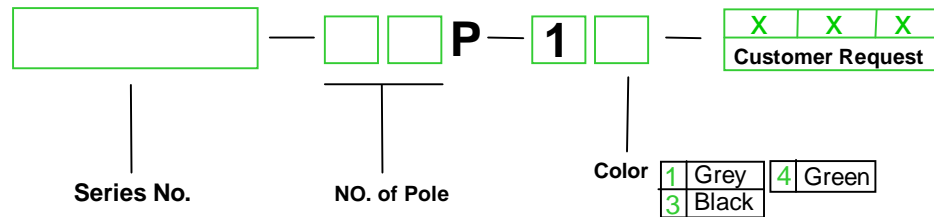

Poles	4	6	8	10	12	14	16	18	20	22	24	26	28	30
L(mm)	20.97	28.59	36.21	43.83	51.45	59.07	66.69	74.31	81.93	89.55	97.17	104.79	112.41	120.03
S(mm)	7.62	15.24	22.86	30.48	38.10	45.72	53.34	60.96	68.58	76.20	83.82	91.44	99.06	106.68
Poles	32	34	36	38	40	42	44	46	48					
L(mm)	127.65	135.27	142.89	150.51	158.13	165.75	173.37	180.99	188.61					
S(mm)	14.30	21.92	29.54	37.16	44.78	52.40	60.02	67.64	75.26					

	DEGSON ELECTRONICS CO., LTD.
	NAME DG24-2