


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
△		品名、料号增加环保标示“H”	LJH	12/08/07	
△		增加UL、CE刻字	CSX	04/12/08	
△		修改参数	LJH	12/16/08	
△	09-0120	增加VDE刻字及参数	GHY	11/23/09	

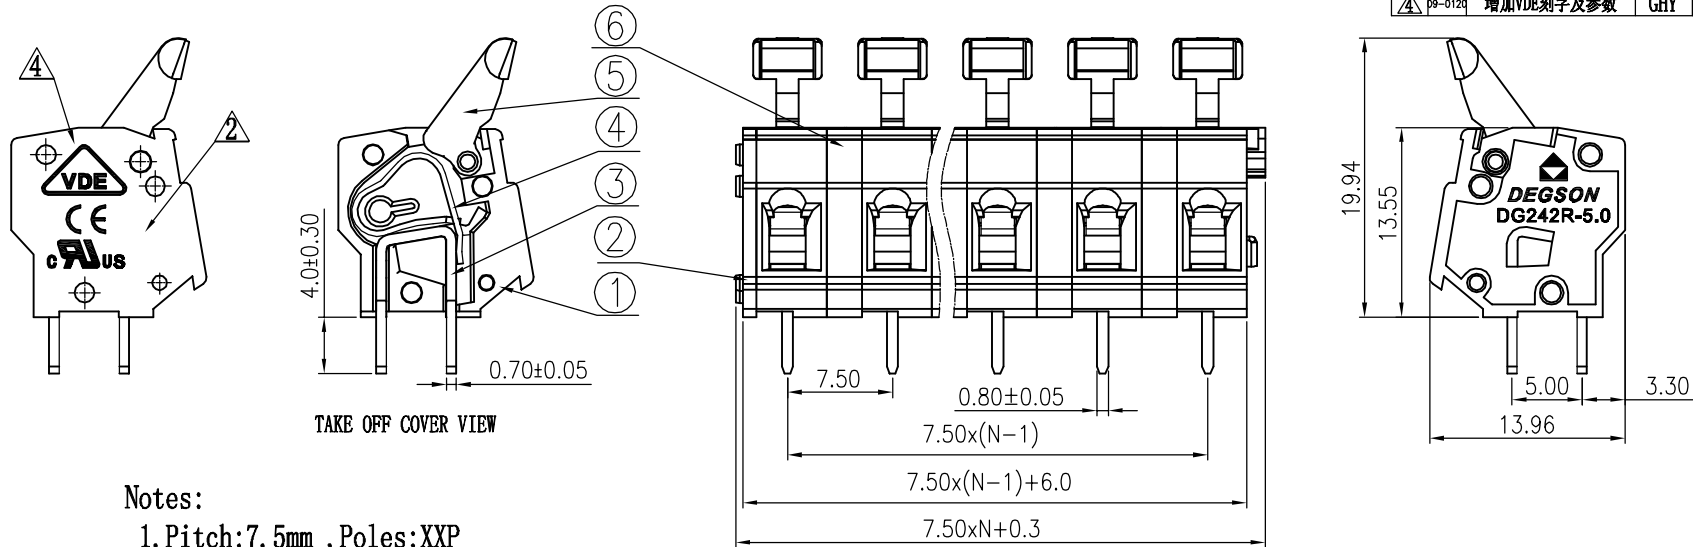

Notes:

1. Pitch: 7.5mm , Poles: XXP
2. Rated voltage/current: UL 300V/15A  
VDE 750V/17A △
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 5000MΩ / DC1000V
6. Wire Range: 28~12AWG, 0.2~2.5mm<sup>2</sup>
7. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
to	over	over	to	over	over	over	over	
6	6	10	30	30	60	100	150	∩
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	∩

6	DG242R-7.5-Calpboard	3026H0Y01A (H)	XX-1	PA66	UL94V-0
5	DG243-Button	3027D1701A (H)	XX	POM	UL94HB
4	DG242V-Shrapnel	X000000990 (H)	XX	Stainless steel	
3	DG242R-Pin header	3026B00010 (H)	XX	Phosphor bronze	SnCe Plated
2	DG242R-Cover	3026C0Y01A (H)	1	PA66	UL94V-0

1	DG242R-5.0-Housing	3026A0Y01A (H)	XX	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES	
DETACHED LISTS	MM (INCH)	DFTO Alan	DATE 01/05/07	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG242R-7.5-XXP-1Y-00A(H) DRAWING NO. DG242R-7.5-E01 /PART NO. SIZE A3 REV T4 11/23/08		
	TOLERANCES EXCEPT AS NOTED		CHKD			DATE
			MFO			DATE
			APPVL			DATE
MM	±	G.E :		DO NOT SCALE DRAWING		
.0 ±	±	FINISH :		SHEET 1 OF 1		
.00 ±	±	SCALE : 1:1				
.000 ±	±	THIRD ANGLE PROJECTION				

8 | 7 | 6 | 5 | 4 | 3 | 2 | 1