




DEGSON ELECTRONICS CO., LTD.


Product Specification



| | | |
|----------------------------|--------------------------------------|--------------------|
| Approval | c | |
| Electrical Standard | UL | IEC |
| Rated voltage | 300V | 450V |
| Rated current | 15A | 24A |
| Wire range | 22-14AWG | 2.5mm ² |
| With standing voltage | AC2000V/1Min | |
| Insulation Resistance | 500M Ω /DC500V | |
| Mechanical | | |
| Max. Torque Value | 0.5N.m 4.4Lb.in | |
| Ambient temperature | -40 $^{\circ}$ C ~ +105 $^{\circ}$ C | |
| Dimensions | | |
| Pitch | 8.25mm (.325") | |
| Poles | 2P-24P | |
| Material | | |
| Housing | PA66+23%GF, UL94V-0 | |
| Terminal | Brass, 0.8t Tin plated | |
| Screws | Steel, M3 Ni plated | |

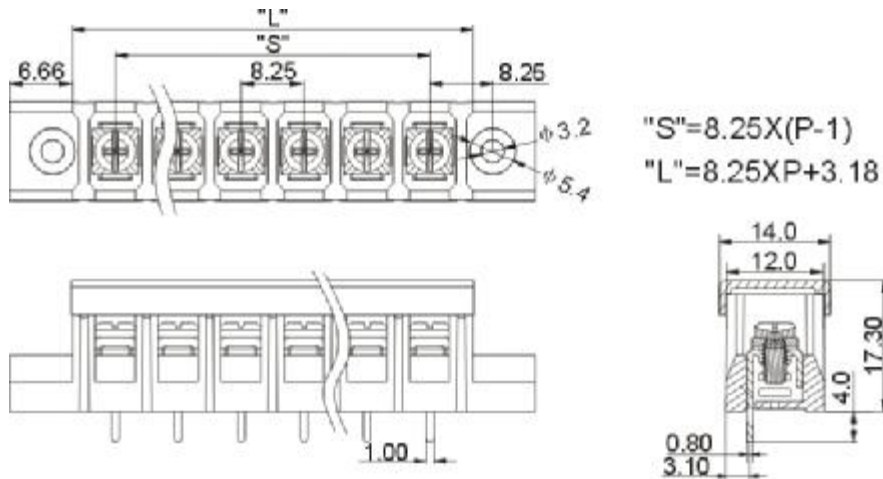

HOW TO ORDER :

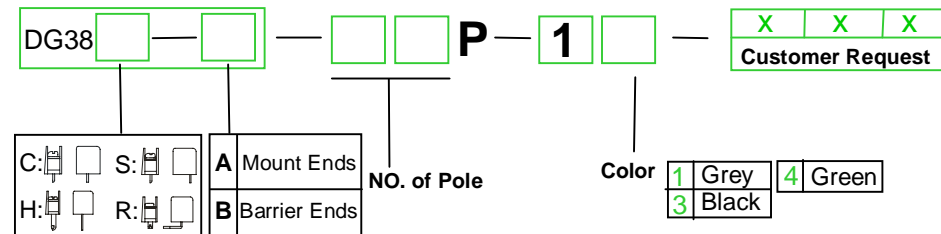

| | | | | | | | | | | | | | | |
|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Poles | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |
| L(mm) | 19.68 | 27.93 | 36.18 | 44.43 | 52.68 | 60.93 | 69.18 | 77.43 | 85.68 | 93.93 | 102.18 | 110.43 | 118.68 | 126.93 |
| S(mm) | 8.25 | 16.50 | 24.75 | 33.00 | 41.25 | 49.50 | 57.75 | 66.00 | 74.25 | 82.50 | 90.75 | 99.00 | 107.25 | 115.50 |
| Poles | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | |
| L(mm) | 135.18 | 143.43 | 151.68 | 159.93 | 168.18 | 176.43 | 184.68 | 192.93 | 201.18 | 209.43 | 217.68 | | | |
| S(mm) | 8.25 | 16.50 | 24.75 | 33.00 | 41.25 | 49.50 | 57.75 | 66.00 | 74.25 | 82.50 | 90.75 | 99.00 | 107.25 | 115.50 |

| | |
|--|-------------------------------------|
| | DEGSON ELECTRONICS CO., LTD. |
| | NAME DG38S-A |