


DG44-1-9.52

- 双层紧凑型设计,空间更节约;
- 栅栏式结构,可用OT/U型对连接;
- 接线容量。
- Two layer compact design ,save space;
- Barrier type structure .wiring use with OT/U fork terminal;
- Wire range:28-12 AWG.

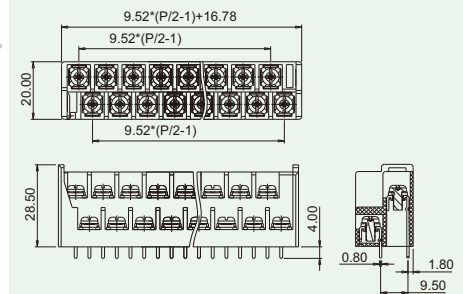

技术参数 Technical Data

APPROVAL: CE

型号 Model	线径 Wire range	线数 Poles	IEC60947技术参数(IEC60947 datasheet)				UL1059技术参数(UL1059 datasheet)			
			电压(V)	Rated voltage	电流(A)	Rated current	电压(V)	Rated voltage	电流(A)	Rated current
DG44-1-9.52	0.2-2.5mm ² /28-12AWG	04-48P	450		24		300		20	

应用行业 Application

工业自动化、新能源、电梯、电源等行业。
Industrial automation, new energy, elevator, power supply etc.



产品包装方式 Packing

Product model	Pcs./Pkt.	Product model	Pcs./Pkt.
DG44-1-9.52-04P	50	DG44-1-9.52-16P	50
DG44-1-9.52-06P	50	DG44-1-9.52-18P	50
DG44-1-9.52-08P	50	DG44-1-9.52-20P	50
DG44-1-9.52-10P	50	DG44-1-9.52-22P	50
DG44-1-9.52-12P	50	DG44-1-9.52-24P	50
DG44-1-9.52-14P	50		

型号对照 Cross Reference

DEGSON	同行1/ Competitor1	同行2/ Competitor2
DG44-1-9.52	4DC-B01W-XX	-

产品订货 How to order

