




DEGSON ELECTRONICS CO., LTD.

Product Specification

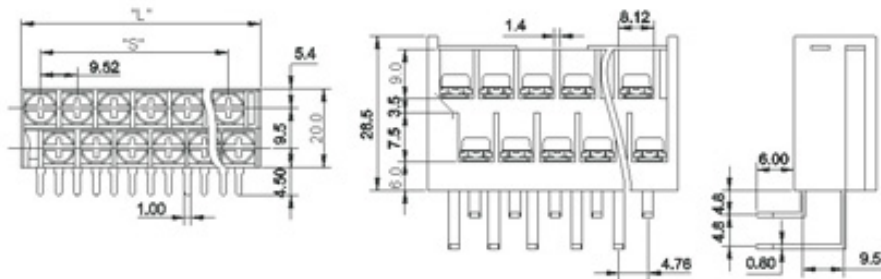

"S"=9.52x(P/2-1)

"L"=9.52x(P/2-1)+17.08


Poles	4	6	8	10	12	14	16	18	20	22	24	26	28	30
L(mm)	26.80	36.12	45.64	55.16	64.68	74.20	83.72	93.24	102.76	112.28	121.80	131.32	140.84	150.36
S(mm)	9.52	19.04	28.56	38.08	47.60	57.12	66.64	76.16	85.68	95.20	104.72	114.24	123.76	133.28
Poles	32	34	36	38	40	42	44	46	48					
L(mm)	159.68	169.40	178.92	188.44	197.96	207.48	217.00	226.52	236.04					
S(mm)	142.80	152.32	161.84	171.36	180.88	190.40	199.92	209.44	218.96					

Approval		
Electrical		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	24A
Wire range	22-14AWG	2.5mm ²
With standing voltage	AC2000V/1Min	
Insulation Resistance	500MΩ / DC500V	
Mechanical		
Max. Torque Value	0.8Nm 7.0Lb.in	
Ambient temperature	-40°C~+105°C	

Dimensions		
Pitch	9.52mm(.375")	
Poles	2*(2P-18P)	

Material		
Housing	PA66+23%GF, UL94V-0	
Terminal	Brass,0.8t Tin plated	
Screws	Steel,M3.5 Ni plated	

HOW TO ORDER

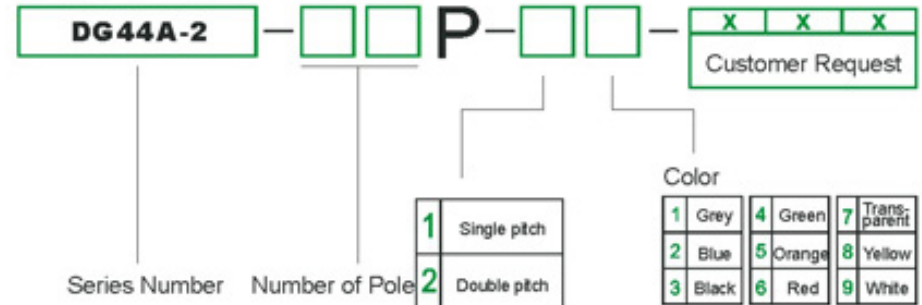

		DEGSON ELECTRONICS CO., LTD.
	NAME	DG44A-2