




REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		增加U刻字	CSX	03/16/07
△		品名、料号增加环保标识“00”	YeJ	12/08/07

Notes:

- Pitch: 9.5mm, Poles: 2-20P
- Rated current: 20A
- Rated voltage: 300V
- Operation temperatures: -40° C ~ +105° C
- Insulation Withstand Voltage: AC2000V/Min
- Insulation Resistance: 500MΩ / DC500V
- Wire Range: 22~12AWG
- Max. Torque Value: 12.24kgf.cm
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to		
6	10	10	24	30	60	100	150	∩
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	□

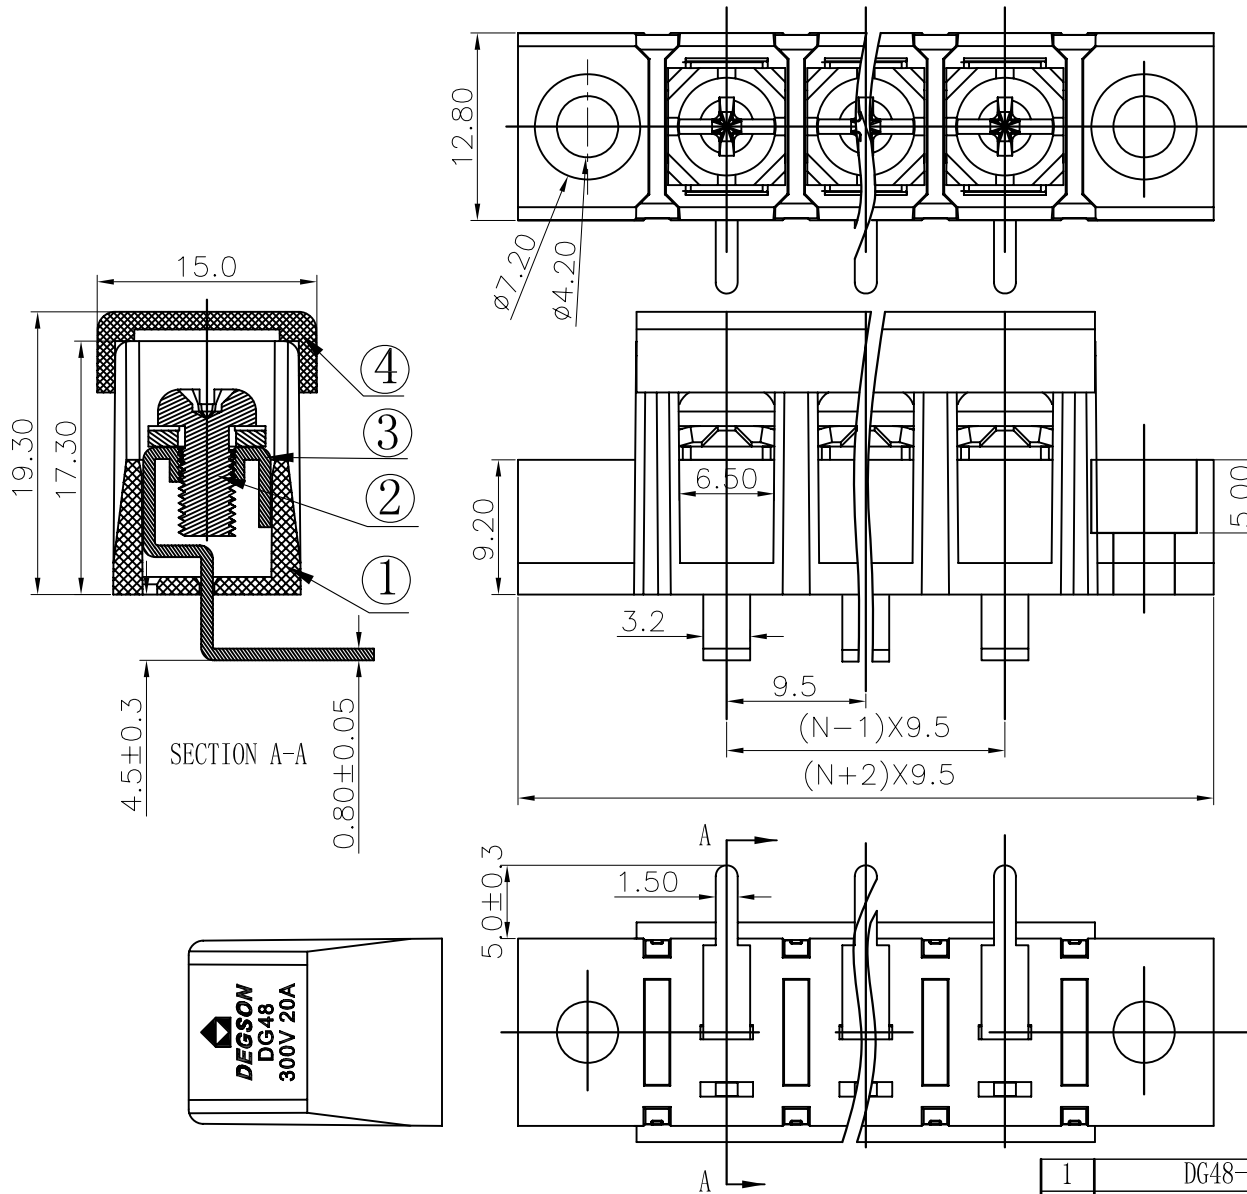

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
4	DG48-Cover	5051C07XXA (H)	1	PC	
3	DG58R Pin header	5008B00060 (H)	XX	Brass SnCe plated	
2	M4*8 (7.5*7.5) bright Screws	S000000570 (H)	XX	Steel Ni plated	

1	DG48-A-Housing	5051MOYXXA (H)	1	PA66+23%GF	UL94V-0
TOLERANCES EXCEPT AS NOTED		DFTO Zhuwm	DATE 01/13/06"	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
MM (INCH)		CHKD	DATE	NAME	
.0 ±		MFO	DATE	DG48R-A-XXP-1Y-00A(H)	
.00 ±		APPVL	DATE	DRAWING NO. DG48R-E01	
.000 ±		MATERIAL :		/PART NO.	
ANGLES ± 1'		G.E :		SIZE	REV
THIRD ANGLE PROJECTION		FINISH :		A3	T2
SCALE : 1:1				DO NOT SCALE DRAWING	
SHEET 1				OF 1	