





REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△		Drawing Revise	Haoyh	03/10/06
△		修改线数: 改为每个焊脚代表一线	LJH	03/22/08
△	10-0363	修改技术参数	ZXX	10/28/10

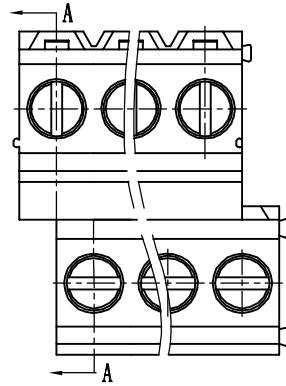


Notes:

1. Pitch: 5.0mm, Ploes: XXP
2. Rated voltage/current: UL 300V/15A △
VDE 250V/24A
3. Operation temperatures: -40° C ~ +105° C
4. Insulation Withstand Voltage: AC2000V/1Min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Wire Range: 24~12AWG, 2.5mm²
7. Max. Torque Value: M2.5, 4.08kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					—	
to	over	to	over	over	over	over	—	
6	6 to 10	10	10 to 24	30	60	100	150	∩
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	∇

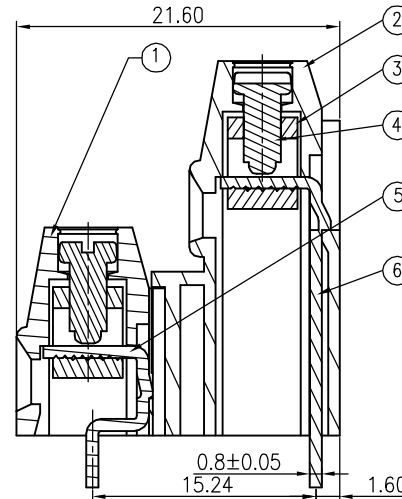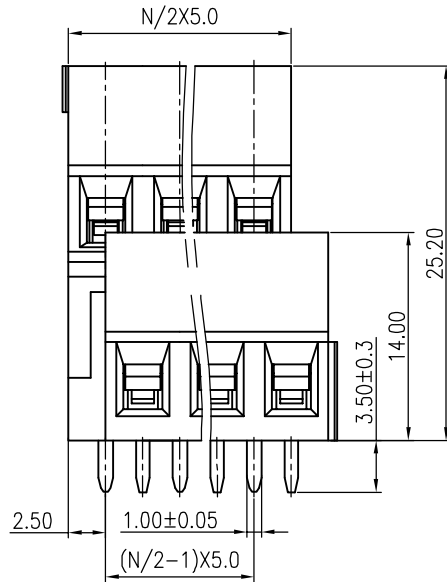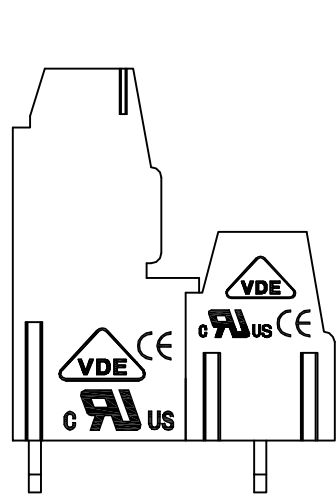

SECTION A-A

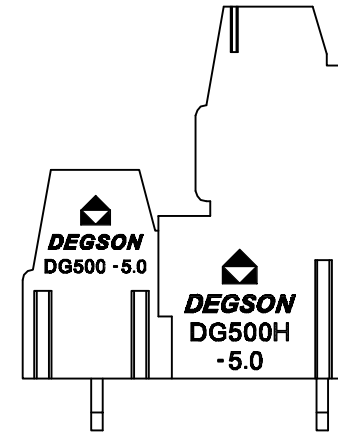

6	DG500H-Pin header	4038B00010 (H)	△	XX/2	Brass	SnCe
5	DG128-Pin header	4027B00010 (H)	△	XX/2	Brass	SnCe
4	DG128"-Screw	S000001460 (H)	△	XX	Steel	Cr ³⁺ Zn
3	DG128 Brass Cage	X000000020 (H)	△	XX	Brass	Ni plated
2	DG500H-5.0-Housing	4037A0Y (XX/2) A (H)	△	1	PA66	UL94V-0

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DG500-5.0-Housing	4045A0Y (XX/2) A (H)	1	PA66	UL94V-0

TOLERANCES EXCEPT AS NOTED MM (INCH) .0 ± () .00 ± () .000 ± ()		DFTO longxc DATE 08/25/04" CHKD DATE MFO DATE APPVL DATE	宁波高正电子有限公司 DEGSON® DEGSON ELECTRONICS CO., LTD NAME DG500A-5.0-XXP-1Y-00A(H) DRAWING NO. DG500A-5.0-E01 /PART NO. DO NOT SCALE DRAWING	SIZE A3 REV T3 10/28/10"
ANGLES ± 1° THIRD ANGLE PROJECTION		G.E : FINISH : SCALE :		
		SHEET 1 OF 1		