



### DGMT2.5-5.08

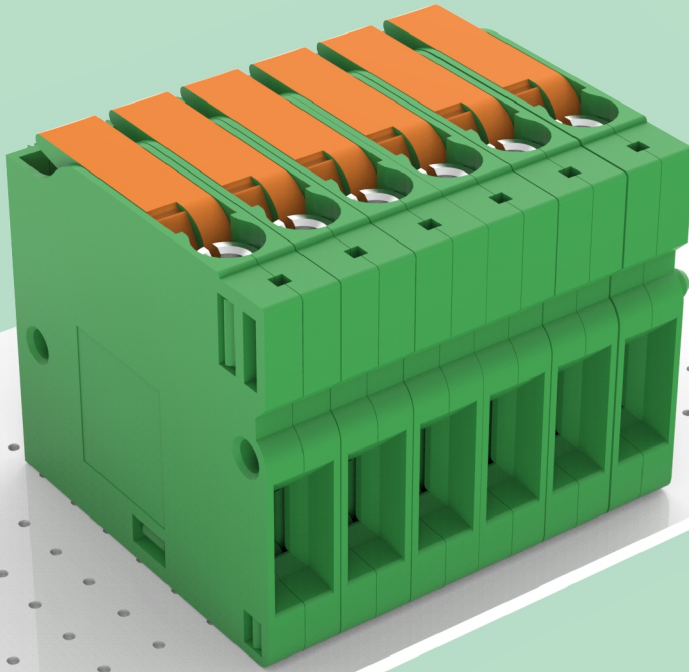

- 螺钉式连接方式。
- 最大接触力，导电性能优。
- 允许连接两条绞线。
- 使用内置的测试元件，可快速方便地进行测试。
- 采用颜色编码的绝缘插头，可轻松断开回路连接。
- 两个焊接插针可降低焊接点上的机械应力。
- 通过侧面的锁扣可以组合不同位数。
- Screw connection.
- Connection force maximized and excellent conductive performance.
- Two wires connection is available.
- Testing parts inside, convenient for quick testing.
- Insulated plug with colored code, easy for circuit disconnection.
- Two solder pins to lower the mechanical force on soldering point.
- Locks on the side to combine different poles.

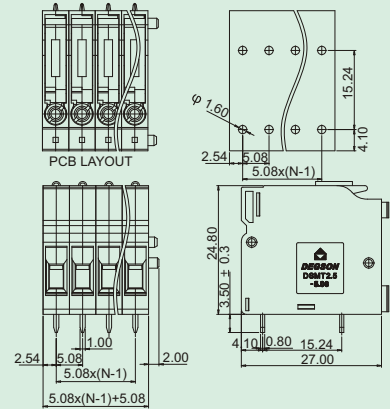

#### 技术参数 Technical data

APPROVAL: CE

型号 Model	线径 Wire range (AWG/mm <sup>2</sup> )	线数 Poles	IEC60947技术参数 (IEC60947 data sheet)		UL1059技术参数 (UL1059 data sheet)	
			电压(V) Rated voltage	电流(A) Rated current	电压(V) Rated voltage	电流(A) Rated current
DGMT2.5-5.08	28-12/0.2-2.5	01-XXP	320	24	300	15

#### 应用行业 Application

工业自动化，新能源，电梯，电力电气，电源，照明，安防等行业。

industrial automation, new energy, elevator, electric power, power supply, lighting, security

#### 产品包装方式 Packing

Product model	Pcs./Pkt.
DGMT2.5-5.08-01P	50

#### 型号对照 Cross reference

DEGSON	同行1/Competitor1	同行2/Competitor2
DGMT2.5-5.08	KDS 3-MT	-

#### 产品订货 How to order

DGMT2.5-5.08	-	X	X	P	-	1	4	-	0	0	A(H)
Series NO.		NO. of pole							Standard		
		1	2						通用色 General Color		
		Single pitch	Double pitch					4	Green	PANTONE 556C	DEGSON 04