

REV	CONTENT	CHK	DATE
V0.0	CONTENT	CXL	21.01.12

Electrical :

- | | | |
|--|---------------|------|
| | UL | IEC |
| 1.Rated Voltage : | 150V | 160V |
| 2.Rated Current : | 8A | 8A |
| 3.Withstanding Voltage : | AC1300V/1Min. | |
| 4.Operating Temperature : | -40°C~+130°C | |
| 5.RoHS Compliance | | |
| 6.Safty Approval : | cULus CE | |
| 7."★" is the key quality control point | | |






15EGTRHCM-THR - 3.5 -XXP - X X - 00

- | | | | | | | |
|--------------|--------------------|---------|--|------------------------------------|--|---|
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ |
| ① Series NO. | ② High temperature | ③ Pitch | ④ Poles | ⑤ 1 Single Pitch
2 Double Pitch | ⑥ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White | |
| | | | 04 04Contacts
06 06Contacts
...
48 48Contacts | | | |

⑦ Customer Request: 00--Standard

5	NUT	XX	2	STEEL	Zn Plated
4	LONG-PIN	XX	P/2	COPPER ALLOY	Tin Plated
3	SHORT-PIN	XX	P/2	COPPER ALLOY	Tin Plated
2	PATCH	XX	1	High temperature material	SEE NOTE
1	HOUSING	XX	1	High temperature material	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CXL	DATE	21.01.12	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.	DATE			SCALE	1:1
APP.	DATE			NAME	15EGTRHCM-THR-3.5-XXP-XX-00
				DWGNO	XXXXX

Golten 宁波冠泰电子有限公司
NINGBO GOLTEN ELECTRONICS CO., LTD.

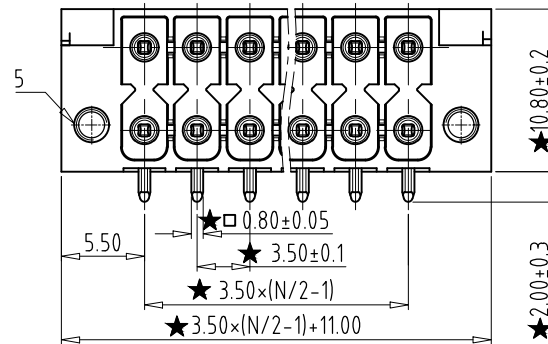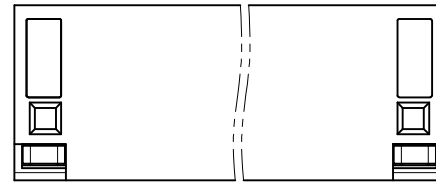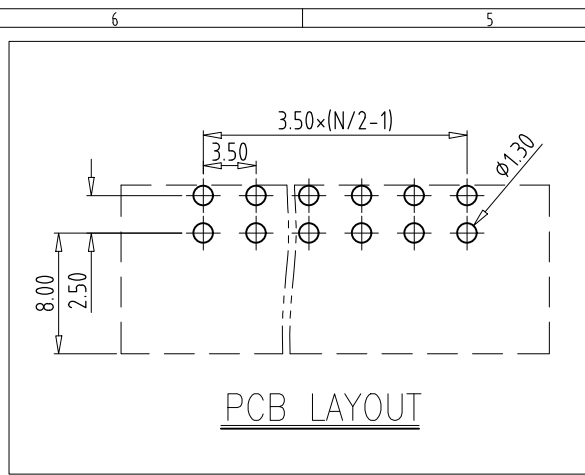

A	Total Pitch Tolerances in mm									Nominal dimension range in mm								$\perp$		$\equiv$	$-$	$//$			
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 0	over 10	all	over 0	over 100	over 150	
	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to		to	to		to
	30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10	100		150			
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5	