







REV	CONTENT	CHK	DATE
VO.0	CONTENT	CXL	21.01.12

Electrical :

- 1. Rated Voltage : UL 150V IEC 160V
- 2. Rated Current : 8A 8A
- 3. Withstanding Voltage : AC1300V/1Min.
- 4. Operating Temperature : -40°C~+130°C
- 5. RoHS Compliance
- 6. Safety Approval : **ULus CE**
- 7. ★ " is the key quality control point

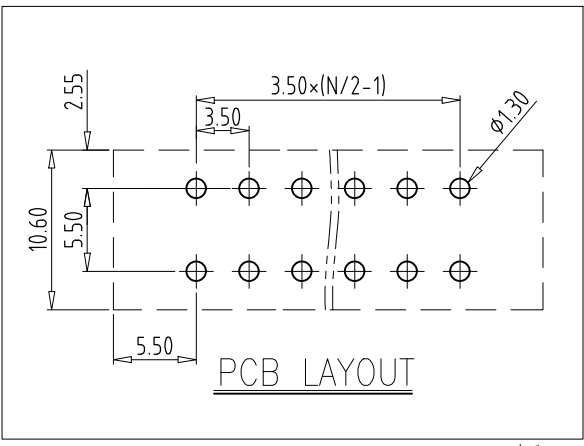

PCB LAYOUT

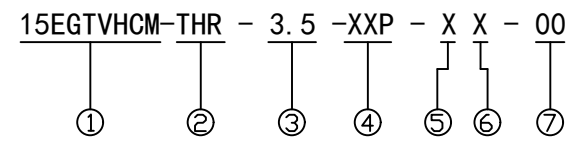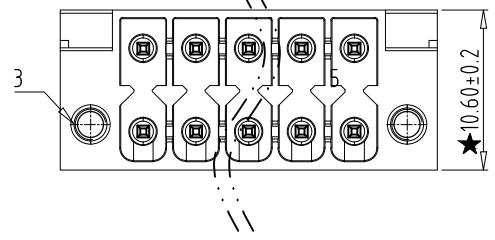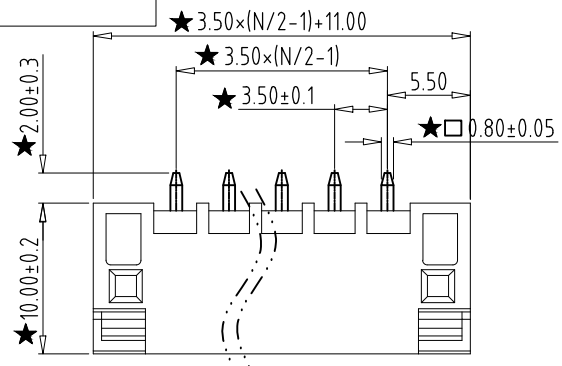

- ① Series NO.
- ② High temperature
- ③ Pitch
- ④ Poles
04 04Contacts
06 06Contacts
...
48 48Contacts
- ⑤ 1 Single Pitch
2 Double Pitch
- ⑥ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White
- ⑦ Customer Request: 00--Standard

3	NUT	XX	2	STEEL	Zn Plated
2	PIN	XX	P	COPPER ALLOY	Tin Plated
1	HOUSING	XX	1	High temperature material	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CXL	DATE	21.01.12	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.	DATE			SCALE	1:1
APP.	DATE			NAME	15EGTVHCM-THR-3.5-XXP-XX-00
宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.			DWGNO.	XXXXX	

Total Pitch Tolerances in mm									Nominal dimension range in mm										⊥	=	-	//	
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 10	all	over 0	over 100	over 150
to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 350	to 500	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10	10	to 100	to 100	to 150	to 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5