





REV	CONTENT	CHK	DATE
V0.0	CONTENT	CXL	20.05.20

Electrical :


- | | | |
|--|-----------------|--------------------|
| | UL | IEC |
| 1. Rated Voltage : | 300V | 320V |
| 2. Rated Current : | 15A | 20A |
| 3. Torque Value : | M2.5 ,3.54Lb.in | M2.5, 0.4N.m |
| 4. Wire Range: | 28-12AWG | 2.5mm ² |
| 5. Stripping Length : 7-8mm | | |
| 6. Withstanding Voltage : AC1600V/1Min. | | |
| 7. Operating Temperature : -40°C~+105°C | | |
| 8. RoHS Compliance | | |
| 9. Safty Approval : | | |
| 10. "★" is the key quality control point | | |



- ① Series NO. ④ 1 Single Pitch
 2 Double Pitch
- ② Pitch
- ③ Poles
02 02Contacts
03 03Contacts
...
24 24Contacts
- ⑤ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White
- ⑥ Customer Request: 00--Standard

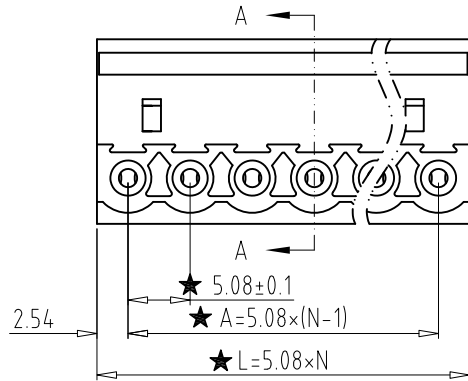

SECTION A-A



5	SCREW	XX	N	STEEL	Zn Plated
4	BLOCK	XX	N	BRASS	Ni Plated
3	CLAMP	XX	N	PHOSPHOR BRONZE	Ni Plated
2	COVER	XX	1	PA66 UL94V-0	SEE NOTE
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CXL	DATE	20.05.11	SIZE	A4 UNITS mm SHEET/OF 1/1
CHK.		DATE		SCALE	1:1
APP.		DATE		NAME	2EGTK-5.08-XXP-XX-00
				DWGNO.	XXXX

Grolten 宁波冠泰电子有限公司
NINGBO GOLDEN ELECTRONICS CO., LTD.

Total Pitch Tolerances in mm									Nominal dimension range in mm											⊥	≡	-	//						
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	0	100	150
0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	320	to	to	to	to	to	to	0	100	150		
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.3	0.3	0.5						